

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2022 年 1 月 27 日 (27.01.2022)



(10) 国际公布号
WO 2022/016337 A1

- (51) 国际专利分类号:
H04W 24/08 (2009.01)
- (21) 国际申请号: PCT/CN2020/103106
- (22) 国际申请日: 2020 年 7 月 20 日 (20.07.2020)
- (25) 申请语言: 中文
- (26) 公布语言: 中文
- (71) 申请人: 北京小米移动软件有限公司
(**BEIJING XIAOMI MOBILE SOFTWARE CO., LTD**)
[CN/CN]; 中国北京市海淀区西二旗中路33号院
6号楼8层018号, Beijing 100085 (CN).
- (72) 发明人: 付 婷 (**FU, Ting**); 中国北京市海淀区
西二旗中路33号院6号楼8层018号,
Beijing 100085 (CN).
- (74) 代理人: 深圳市立智方成知识产权代理事务所
(普通合伙) (**LIFANG & PARTNERS LTD.**); 中
国广东省深圳市福田区金田路4018号安联大
厦B2203, Guangdong 518000 (CN).
- (81) 指定国(除另有指明, 要求每一种可提供的国家
保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG,
BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU,
CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB,
GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT,
JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK,
LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX,

(54) **Title:** COMMUNICATION METHOD, USER EQUIPMENT, BASE STATION DEVICE, AND COMPUTER STORAGE MEDIUM

(54) 发明名称: 通信方法、用户设备、基站设备及计算机存储介质

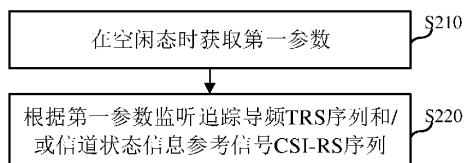


图 2

- S210 Acquire a first parameter when in an idle state
- S220 According to the first parameter, monitor and track a pilot frequency TRS sequence and/or a channel state information reference signal (CSI-RS) sequence

(57) **Abstract:** The embodiments of the present disclosure relate to the technical field of wireless communications. Disclosed are a communication method, a user equipment, a base station device, and a computer storage medium. The communication method comprises: acquiring a first parameter when in an idle state; and then, according to the first parameter, monitoring and tracking a pilot frequency TRS sequence and/or a channel state information reference signal (CSI-RS) sequence. By means of the method in the embodiments of the present disclosure, a UE can acquire a first parameter necessary for monitoring a TRS sequence and/or a CSI-RS sequence when the UE is in an idle state, such that the TRS sequence and/or the CSI-RS sequence can be monitored according to the acquired first parameter, and according to a monitoring result of the TRS sequence and/or the CSI-RS sequence, whether to attempt to monitor paging DCI in a PO and a PDSCH corresponding to the paging DCI can thus be determined.

(57) **摘要:** 本公开实施例涉及无线通信技术领域, 公开了一种通信方法、用户设备、基站设备及计算机存储介质, 其中, 通信方法包括: 在空闲态时获取第一参数; 接着, 根据第一参数监听追踪导频TRS序列和/或信道状态信息参考信号CSI-RS序列。本公开实施例的方法, 使得UE在空闲态下可以获取到用于监听TRS序列和/或CSI-RS序列所必须的第一参数, 从而可以根据获取到的第一参数, 对TRS序列和/或CSI-RS序列进行监听, 进而可以根据TRS序列和/或CSI-RS序列的监听结果, 确定是否尝试监听PO中的寻呼DCI以及其对应的PDSCH。

[见续页]

WO 2022/016337 A1

MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL,
PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL,
ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国 (除另有指明，要求每一种可提供的地区
保护)：ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ,
NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM,
AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG,
CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU,
IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT,
RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI,
CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布：

— 包括国际检索报告 (条约第21条(3))。