

(43) International Publication Date
17 December 2009 (17.12.2009)(10) International Publication Number
WO 2009/152178 A1

(51) International Patent Classification:

H04W 48/00 (2009.01) H04W 80/04 (2009.01)
H04W 88/00 (2009.01) H04W 88/06 (2009.01)
H04L 12/28 (2006.01) H04W 60/00 (2009.01)
H04L 12/56 (2006.01)

(21) International Application Number:

PCT/US2009/046789

(22) International Filing Date:

9 June 2009 (09.06.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/059,935 9 June 2008 (09.06.2008) US
12/480,074 8 June 2009 (08.06.2009) US

(71) Applicant (for all designated States except US): **QUALCOMM INCORPORATED** [US/US]; Attn: INTERNATIONAL IP ADMINISTRATION, 5775 Morehouse Drive, San Diego, CA 92121 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GIARETTA, Gerardo** [IT/US]; 5775 Morehouse Drive, San Diego, CA

92121 (US). **TSIRTSIS, Georgios** [GB/GB]; 5775 Morehouse Drive, San Diego, CA 92121 (US). **JIN, Haipeng** [CN/US]; 5775 Morehouse Drive, San Diego, CA 92121 (US).

(74) Agent: **PATEL, Milan, I.**; Attn: INTERNATIONAL IP ADMINISTRATION, 5775 Morehouse Drive, San Diego, CA 92121 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: A METHOD AND APPARATUS FOR PCC ENHANCEMENT FOR FLOW BASED MOBILITY

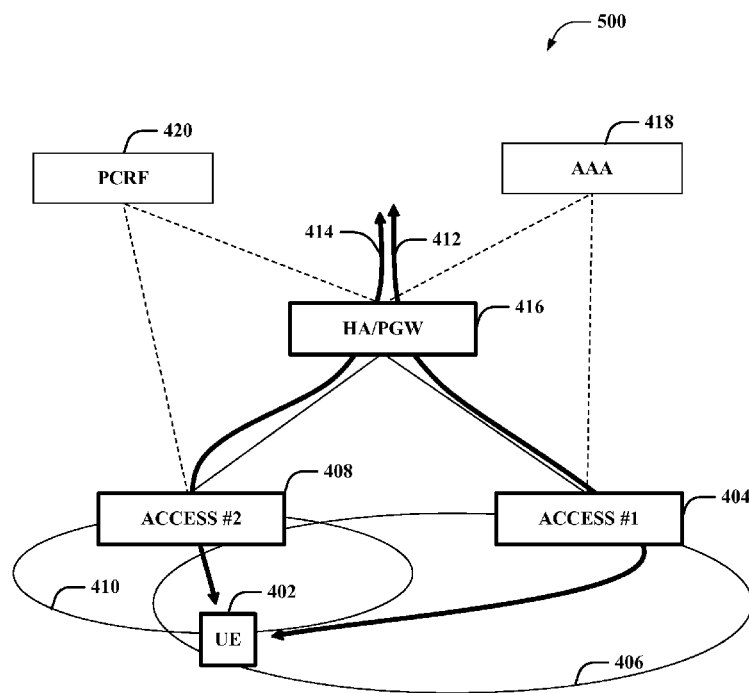


FIG. 5

(57) Abstract: Systems and methods are described that facilitate multiple registrations and flow based mobility in a wireless communication network. A flow routing component can be included in a mobile device, home agent / p-gateway, or a policy and charging rules function server that determines the manner in which to route one or more IP flows through a set of network access entry points. The flow routing component can determine the routing based on a set of policies and/or network data, such as quality of service requirements, bandwidth requirements, network congestion, currently active IP flows, and so forth.



ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),
OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,
MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*