

RCA 85,984

9603605-8
IP05

APPARATUS FOR PROVIDING TV PROGRAM INFORMATION

FIELD OF THE INVENTION

The present invention relates to the field of television
5 receivers incorporating teletext decoders.

BACKGROUND OF THE INVENTION

The VPS- and Teletext signals contain useful program-
related information which can be displayed to the TV viewer.

10 European Patent Application EP 89106255.6 describes the
required hardware and software extensions to realize suitable
signal processing to find this information and display the title of
the current program and the name of the broadcasting station. A
TV set, equipped with a teletext decoder, need only be
15 supplemented with a VPS-decoder and some additional software
in the teletext controller to provide these useful features.

In the meantime the realization of this information
display became increasingly attractive as new teletext-dataslicers
with built-in VPS-decoders became available. Thus, such a
20 system can be implemented into TV receivers without any
additional hardware expenses, when using this new dataslicer
(such as an SDA 5645) for the teletext-decoder.

In addition to the title of the current program and the
name of the broadcasting station, some supplementary program-
25 related information is contained in the VPS- and Teletext signals.
Currently available decoders cannot retrieve this supplementary
program-related information.

SUMMARY OF THE INVENTION

30 The present invention describes how to obtain, from
the supplementary information, the end-time and/or the
remaining duration of the current program as well as the starting-
time of the next program, and how to display this information on-
screen. It is herein recognized that the system described in EP
35 89106255.6 may be modified in software to realize these useful
supplementary features.

This Sheet Has Been Replaced



REPLACED SHEETS		SG
☒	Description	: paged ...1... to paged ...7.....
☒	Claim(s)	: paged ...8... to paged ...10.....
☒	Drawing(s)	: paged ...1/4... to paged ...1/4.....
☒	Abstract	: paged ...h... to paged
DATE OF RECEIPT		

RCA 85,984

BRIEF DESCRIPTION OF THE DRAWING

FIGURES 1a, 1b, and 1c, show examples of teletext
5 program schedule pages as known from the prior art.

FIGURE 2 is a block diagram of system hardware
suitable for practicing the invention.

FIGURES 3a, 3b, and 3c show examples of distributions
over several pages of a television program schedule for a single
10 day.

FIGURE 4 is a flowchart showing the relevant portion
of the control program for the microcomputer of FIGURE 2.

FIGURES 5a, and 5b show examples of program-related
information displays.
15

DETAILED DESCRIPTION OF THE EMBODIMENT

The required program related information is obtained
from the VPT-pages in teletext. (VPT Videorecorder Programming
20 by Teletext). VPT-pages are TV-program schedule pages where
all the data required for VCR programming are inserted and
explicitly characterized by specific data formats. These data
correspond to the VPS-data, transmitted on line 16.

It is therefore possible for a microcomputer to find the
25 VPT-page containing the information related to the current
program, by correlating the actual VPS-code with the incoming
TXT-pages. The required procedures and the solution of the
problem caused by the time constraints of the data transfer bus
(IIC-bus) were presented in the above-mentioned European
30 patent application EP 89106255.6.

The display of on-air time information is based on
these VPT-pages. The well-defined assignments of the VPT-data
allow one to derive the required information for display from
these pages as soon as they are found.

35 The display of program-time information is based on
the following definitions. The given explanations of the used
terms are important for better understanding of the descriptions.

This Sheet Has Been Replaced



RCA 85,984

On the VPT program pages each announced program has explicitly assigned to it the following data with their own characteristic format:

On-air time:

- 5 The on-air time is represented in single-time format (xx.xx) or in double-time format (xx.xx.-yy.yy). The later format defines both starting and end time.

Title of the program:

- 10 The title uses one or more teletext rows.

VPS-time:

The VPS-time format differs from the single-time format, in that it has no dot character between the hours and minutes (xxxx).

- 15 The most important difference between the VPS-time and the starting time is that the former is not changed in case of changes in the program schedule, while the latter matches the scheduled real on-air time.

- 20 Assignment of starting-time and end-time:

On-air time in single time format:

The end-time of a program is given by the starting-time of the following program on the VPT page. Otherwise, when there is no following program on that page, an additional time information, in single time format without a title must be present for this purpose, as shown in FIGURE 1a.

- 25 A starting-time with a VPS time 2500 is used to characterize a transmission pause. It also represents therefore the end-time of the previous program.

30

On-air time in double time format:

The end-time is explicitly contained in the double-time format, as shown in FIGURE 1b.

Assignment of on-air time and title:

- 35 The arrangement of on-air time (starting-time) and the corresponding title is fixed; first the on-air time and then the corresponding title. The end of a title is marked by the following starting time.

This Sheet Has Been Replaced



RCA 85,984

Assignment of on-air time and VPS-time:

The arrangement of the VPS-times must correspond to the sequence of the announced programs (represented by their starting-times) on the VPT-page. (This also allows the block representation as shown in FIGURE 1c).

The system configuration shown in Fig. 2 is the same as in EP 89106255.6, with the exception of the video processor (data-slicer) SAA 5231. This is replaced by the video processor SDA 5645, which incorporates a VPS decoder, thus eliminating the separate VPS decoder previously used.

When the TV set is turned on or a new channel is selected, the microcomputer acts as described in EP 89106255.6. It first has to read the VPS code of the current program from the VPS-decoder. Then the teletext page that includes the actual TV program schedule (VPT page) has to be found in the incoming Teletext datastream. For this reason the same procedure has to be used as described in EP 89106255.6. When the corresponding page is found, the microcomputer also determines which row contains the starting-time and the first line of the title of the current program.

Next the end-time has to be found: This is trivial if the double-time format is used. Otherwise the microcomputer has to search for the starting-time of the following program, the starting-time of a transmission pause, or the next time format without a title should there be no following program on that page. A similar algorithm as used in EP 89106255.6 is employed to determine the number of lines of the title of the current program.

To display the remaining duration of the current program in addition to (or instead of) the end-time, the rolling time of the header is read and subtracted from the end-time.

Finally, the starting-time of the next program has to be found:

If the end-time of the current program was not obtained from the starting-time of the following program, the microcomputer has to search for this starting-time. Some complications occur if the following program is not listed on the



RCA 85,984

same page. This case has to be considered as the TV program schedule of one day is usually distributed over several pages.

Three different ways of distributing the TV program schedule on different pages exist:

5 Case 1:

on rolling pages with the same page number as shown in FIGURE 3a

Case 2:

10 on different pages with subsequent page numbers as shown in FIGURE 3b

Case 3:

on different pages with subsequent page numbers where each page can be a rolling page as shown in FIGURE 3c.

15

The present invention will be described with reference to the flowchart of FIGURE 4. It is not trivial to find the starting-time of the following program on other pages, as the VPS-code of this program is not known. Therefore, it is impossible to find that
20 page by using the procedure used to find the page with the current program. But the microcomputer can read the page number of the page with the current program. The following program has to be either on a rolling page with the same page number n or on a page with a page number $n+1$, which can also
25 have rolling pages. The microcomputer can therefore make a page request with page number n and another with page number $n+1$ (step 400).

The microcomputer then has to wait for the next appearance of page n (step 410). If, in step 420, a determination
30 is made that the next appearance of page n has the same content as its predecessor, the microcomputer concludes that there are no rolling pages under that page number and therefore the starting time of the following program is on a page with page number $n+1$ (checking the contents for correspondence is simply done by
35 applying the search algorithm used to find the title of the current program to the next page n . If the search algorithm again finds the actual current program, it must be the same page and there



RCA 85,984

are no rolling pages on that page number). In that case, the routine advances to step 440.

5 If there are rolling pages, the microcomputer simply selects the first starting-time with a valid VPS-time from the next page n. At step 430 a check is made to see if this is an earlier time than the starting-time of the current program, the following program has to be searched on page n+1. If so, the routine advances to step 440. Otherwise, the selected time is the starting-time of the next program, and the routine advances to step 480.

1) If the starting-time has to be searched on page n+1, the microcomputer also has to select the first starting-time with a valid VPS time. Should there be a difference between the end-time of the current program and the selected time (step 450), the microcomputer checks if there are rolling pages (step 460) and then selects the earliest time to display as starting-time of the next program (step 470).

FIGURES 5a and 5b show examples of program-related information displays displayed on a screen 510, 510' of a television receiver 500, 500'. Current time of day is displayed (530, 530') as is station designation (520, 520')

The display (540, 540'), indicating the remaining duration, has to be updated during the time the microcomputer waits for the next appearance of pages, and if desired, the title of the following program can also be displayed.

When the microcomputer has found and displayed the starting time of the following program, it has to check if any changes occur on the program schedule pages. In this case the displayed information has to be updated. Normally this information is just displayed for a few seconds but updating is done in the background. Thus the information can be displayed on request immediately.

Thus has been described a program time display which is a useful feature for informing the TV viewer about the end of the current program. It is particularly helpful when changes or delays in the program schedule occur.

Its realization requires only modification of the software needed for displaying station name and program title as



RCA 85,984

known from EP 89106255.6. The procedure for finding the relevant program pages in the incoming Teletext data stream is identical.

This Sheet Has Been Replaced



RCA 85,984

WHAT IS CLAIMED IS:

1. In a television signal processing system wherein the television signals include image representative information and a plurality of accompanying segments of supplementary information including program identification information, and a listing of program title information, program starting times, and program source information, the supplementary information being encoded during vertical blanking intervals of the broadcast signal with at least the program identification information being disposed within vertical blanking intervals of related image-representative information and further being included within said listing, signal processing apparatus comprising:

tuning means for selectively receiving television signals transmitted by individual program sources, the received signals including image-representative information and accompanying segments of supplementary information;

first signal decoder means for decoding said listing and said included program identification information;

memory means for storing and retrieving at least said program title information and included starting time information for the current program and starting time information for the next program decoded by said first signal decoder means;

a first controller means coupled to said first decoder means for selectively transferring said segments of supplementary information among said memory means, said first decoder means and said first controller means;

second signal decoder means for decoding said program identification information disposed within blanking intervals of related image-representative information;

said first controller means, upon initial reception of signals from an individual program source by said tuning means, sequentially causing said second signal decoder means to decode said program identification information accompanying related image-representative information, thereafter causing said first signal decoder means to identify the same program identification information within said listing and to store at least program title information of said listing in said memory means, said first controller means thereafter transferring said program title



RCA 85,984

information from said memory means for display thereof along with related image-representative information; and characterized in that

said program identification information may appear on a page of data n of m pages of data, and may continue onto one of a second page also designated n (P401 am, P401 pm, P401 night) and a further page designated $n+1$ (P301, P302, P303), said second signal decoder means searches said pages (400, 410, 420, 430, 440, 450, 460, 470) and decodes said program information to retrieve one of

a) the starting time and ending time of the current program; and

b) the starting time of the current program and the starting time of a subsequent program;

said first signal decoder thereafter deriving and displaying (480) one of said ending time of the current program and the time remaining in the current program.

2. Signal processing apparatus according to Claim 1 characterized in that said second page also designated n (P401 am, P401 pm, P401 night) is a rolling page.

3. Signal processing apparatus according to Claims 1 or 2 characterized in that said listing comprises teletext information and said first signal decoder means comprises a teletext decoder system.

4. Signal processing apparatus according to Claim 3 characterized in that said second signal decoder means comprises a VPV or VPT decoder system.

5. Signal processing apparatus according to Claim 3 characterized in that said first controller means provides first control signals to said first signal decoder means, upon initial reception of a running program, to cause said first signal decoder means to search teletext transmissions for program identification information matching corresponding information provided by said second signal decoder means.

This Sheet Has Been Replaced



RCA 85,984

6. Signal processing apparatus according to Claim 5 characterized in that said second signal decoder means comprises a VPV or VPT decoder system.

7. Signal processing apparatus according to Claim 5 characterized in that said first controller means transfers (480) program source information, program starting time information and one of program ending time and time remaining in said current program (540) , from said memory means for display along with said program title information.

8. A method of processing television signals wherein the television signals include image-representative information and a plurality of segments of accompanying supplementary information including program identification information having a time component, and a listing including program title information and program source information, the supplementary information being encoded during vertical blanking intervals of the television signal with at least the program identification information being disposed within vertical blanking intervals of related image-representative information and further being included within the listing, the method comprising:

tuning a television signal processor for selectively receiving signals transmitted by an individual program source, the received signals including said image-representative information and accompanying segments of supplementary information;

decoding said listing and said included program identification information;

storing said decoded listing and included program identification information for subsequent retrieval;

decoding said program identification information disposed within blanking intervals of related image-representative information;

comparing said last-named program identification information with said included program identification information to identify matching information; and

This Sheet Has Been Replaced



RCA 85,984

displaying at least program title information
accompanying said included identification information upon
identifying matching program identification information;
and characterized by the additional steps of:

searching for information on rolling pages and
subsequent pages to derive ending time information for the
current program by,

reading again (400, 410) a page of data bearing the
same designation as the previously-read page of data of said
listing;

determining (420) if said read-again page of data is
the same as said previously-read page or a rolling page;

reading (440) a subsequent page of data if said read-
again page of data is the same as said previously-read page of
data;

determining an ending time from one of an explicit
ending time and the starting time of a subsequent program (450,
460, 470).

This Sheet Has Been Replaced



* C L M S *

RCA 85,984

ABSTRACT

5 A known system derives information from the VPS-
and Teletext signals and displays the title of the current program
and the network name on screen for a few seconds, each time a
new channel is selected. The VPS- and Teletext signals contain
more program-related information than mentioned above. The
present invention concerns deriving (400, 410, 420, 430, 440,
10 450, 460, 470) the end-time and/or the remaining duration of the
current program as well as the starting-time of the next program
for display (480) on-screen.

This Sheet Has Been Replaced

P402 402 CH-TEXT 15.02.90 14:25:03
 SRG TV-DRS Donnerstag 15. Februar 1990

24101 150290 CF

08.30 0830 Schulfernsehen: Geographie
 09.20 0920 Reise durch unseren Körper
 09.50 2500 Ende / Pause
 12.55 1255 Nachrichten
 13.00 1300 Ein Heim für Tiere
 13.55 1355 Zeitspiegel: Herrschen des
 goldenen Dreiecks
 14.45 1445 MTW
 15.40

This Sheet Has Been Replaced



a)
 SINGLE TIME FORMAT

P302 302 ARD / ZDF 15.2.90 14.50.17
 ZDF Nachmittagsprogramm 15. Februar 1990

10101 150290 3A

13.45 - 14.15 Reisebilder aus der DDR
 1345
 14.15 - 15.15 Die grossen Pianisten
 1415 Vladimir Horowitz
 16.00 - 16.05 Heute
 1600
 17.00 - 17.45 Rane Kollo
 1700 Ich lad gern mir Gäste ein
 17.45 - 18.00 Tele-Illustrierte
 1745 anschl. Länderspiegel
 18.00 - 18.05 Heute
 1800

b)
 DOUBLE TIME FORMAT

P501 501 CH-TXT 15.02.90 14:55:35
 SRG TV-RSR Donnerstag 15. Februar 1990

24107 150290 81 1000 1015 1400
 1600 1700 1800 1930

10.00 Frühnachrichten
 10.15 - 12.15 Frühfilm
 14.00 Mittagsnachrichten
 14.15 Mittagsfilm
 16.00 Programmvorschau
 17.00 - 17.15 Abendnachrichten
 18.00 - 18.45 Serie
 19.30 - 20.00 Tagesschau

☐ concealed YPT data

c)
 BOTH TIME FORMATS WITH
 BLOCK REPRESENTATION
 OF CONCEALED YPT-DATA

FIG.1

2/4



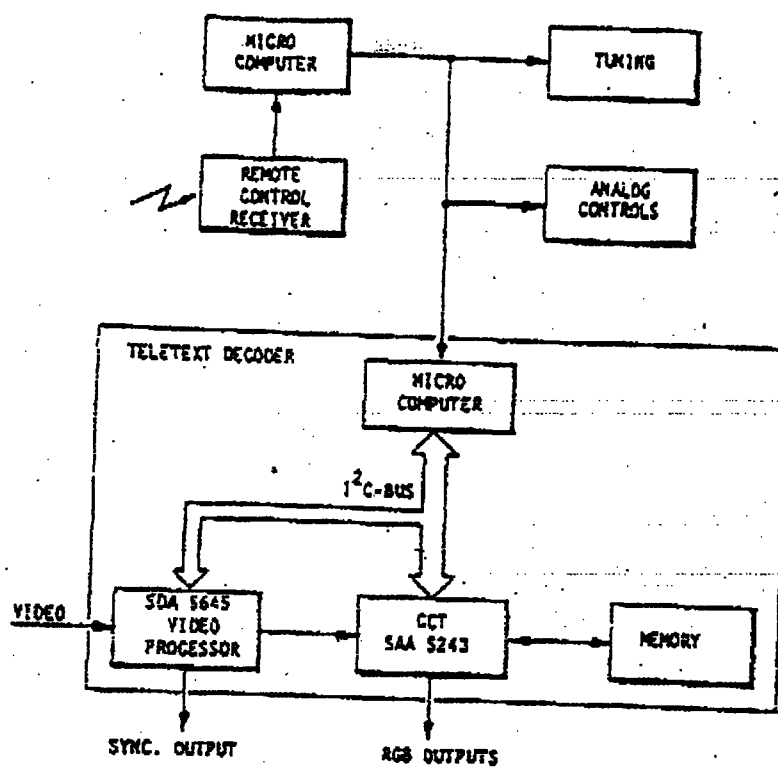



FIG. 2



a) ROLLING PAGES

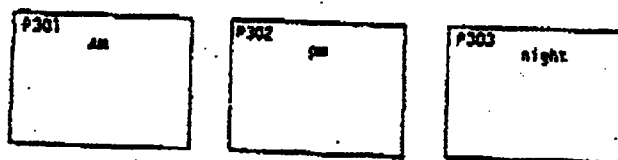

b) DIFFERENT PAGES WITH SUBSEQUENT PAGENUMBERS

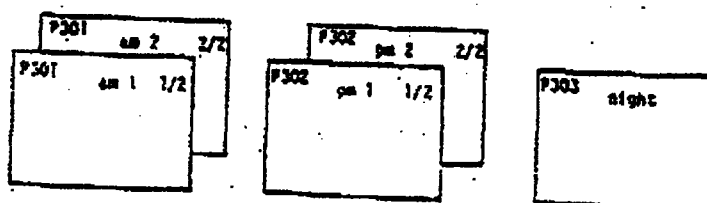

c) DIFFERENT PAGES WITH SUBSEQUENT PAGENUMBERS, WHERE EACH PAGE CAN BE A ROLLING PAGE

FIG. 3

This Sheet Has Been Replaced



3/4

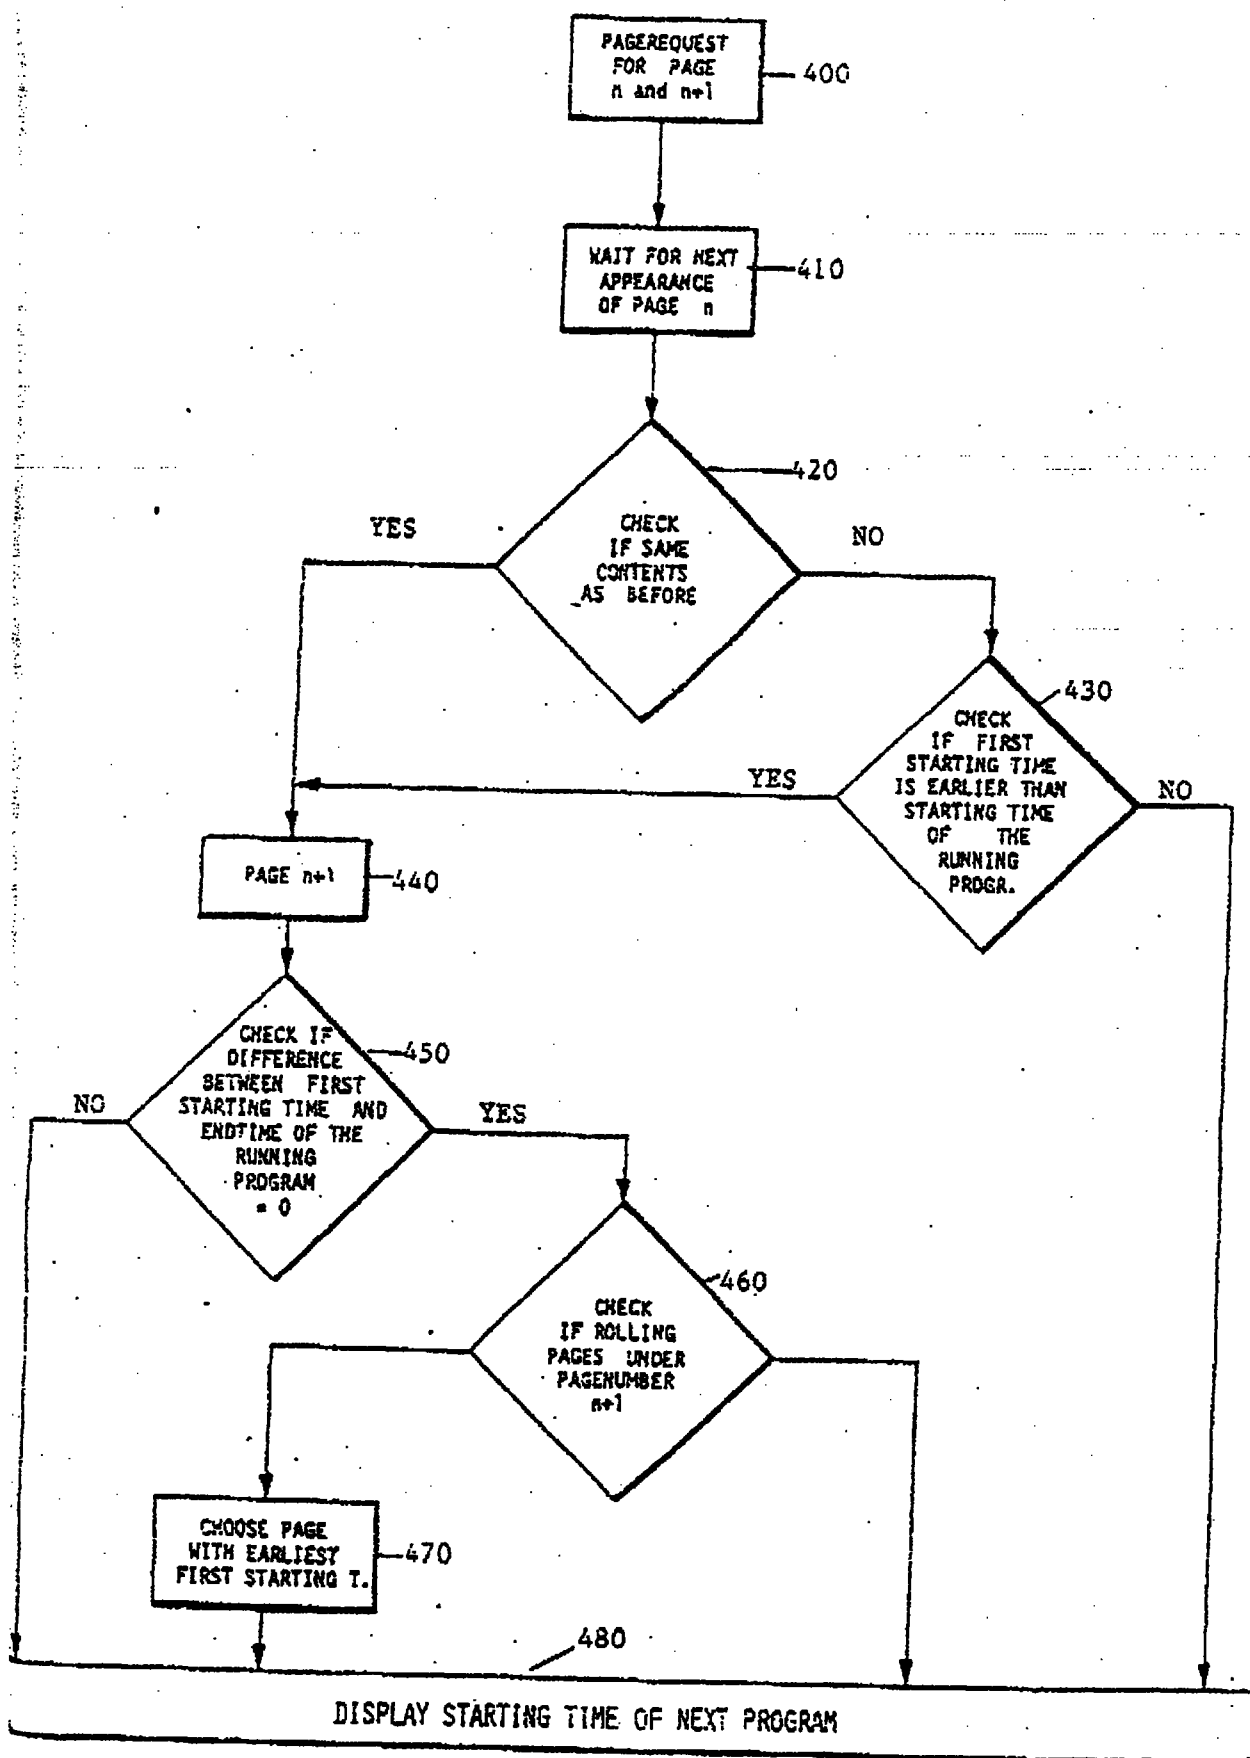


FIG. 4

This Sheet Has Been Replaced



4/4

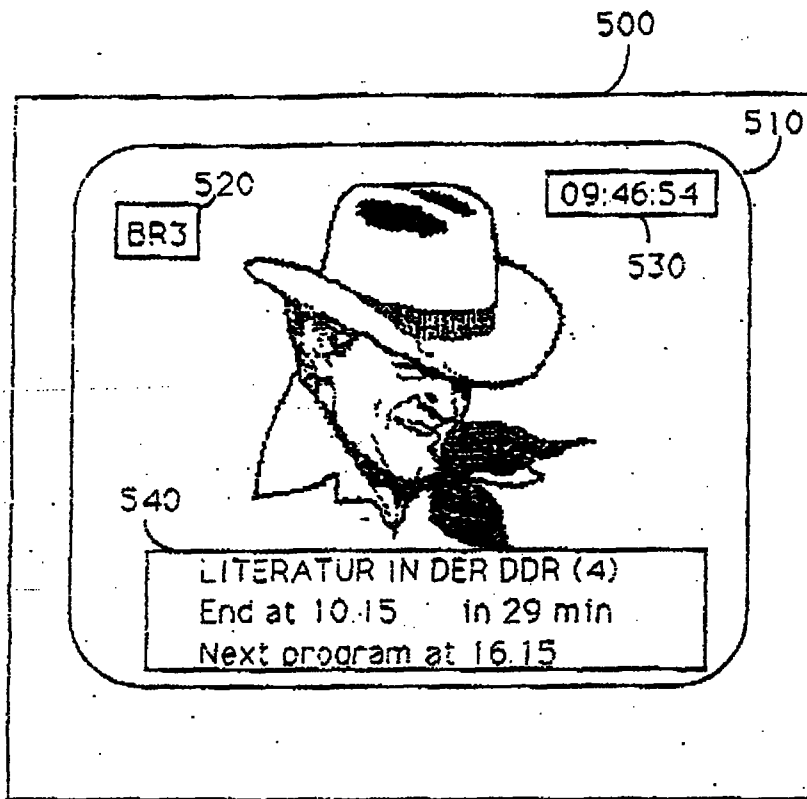


Fig. 5a

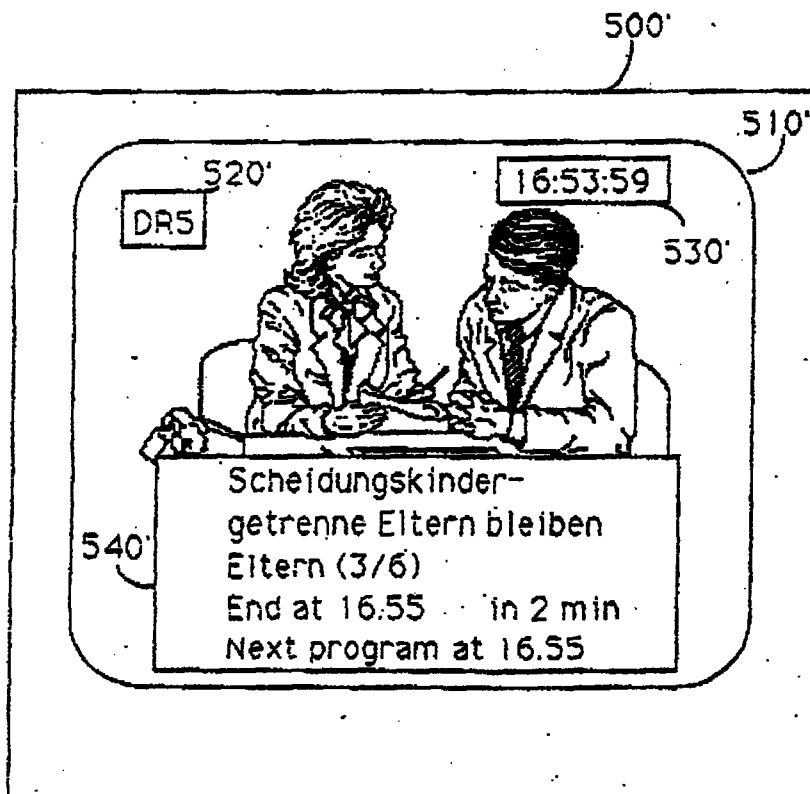


Fig. 5b

This Sheet Has Been Replaced



APPARATUS FOR PROVIDING TV PROGRAM INFORMATION

FIELD OF THE INVENTION

The present invention relates to the field of television
5 receivers incorporating teletext decoders.

BACKGROUND OF THE INVENTION

The VPS- and Teletext signals contain useful program-
related information which can be displayed to the TV viewer.
10 European Patent Application EP 89106255.6 describes the
required hardware and software extensions to realize suitable
signal processing to find this information and display the title of
the current program and the name of the broadcasting station. A
TV set, equipped with a teletext decoder, need only be
15 supplemented with a VPS-decoder and some additional software
in the teletext controller to provide these useful features.

In the meantime the realization of this information
display became increasingly attractive as new teletext-dataslicers
with built-in VPS-decoders became available. Thus, such a
20 system can be implemented into TV receivers without any
additional hardware expenses, when using this new dataslicer
(such as an SDA 5645) for the teletext-decoder.

In addition to the title of the current program and the
name of the broadcasting station, some supplementary program-
25 related information is contained in the VPS- and Teletext signals.
Currently available decoders cannot retrieve this supplementary
program-related information.

SUMMARY OF THE INVENTION

30 The present invention describes how to obtain, from
the supplementary information, the end-time and/or the
remaining duration of the current program as well as the starting-
time of the next program, and how to display this information on-
screen. It is herein recognized that the system described in EP
35 89106255.6 may be modified in software to realize these useful
supplementary features.

This is the replacement sheet

Date: 12 SEP 1996

REPLACEMENT SHEETS SG

☒ Description : paged 1.. to paged 7..
☒ Claim(s) : paged 1.. to paged 1..
☒ Drawing(s) : paged 1.. to paged 1..
☒ Abstract : paged 1.. to paged 1..

DATE OF RECEIPT 11/9/96

BRIEF DESCRIPTION OF THE DRAWING

FIGURES 1a, 1b, and 1c, show examples of teletext
 5 program schedule pages as known from the prior art.

FIGURE 2 is a block diagram of system hardware
 suitable for practicing the invention.

FIGURES 3a, 3b, and 3c show examples of distributions
 over several pages of a television program schedule for a single
 10 day.

FIGURE 4 is a flowchart showing the relevant portion
 of the control program for the microcomputer of FIGURE 2.

FIGURES 5a, and 5b show examples of program-related
 information displays.

15

DETAILED DESCRIPTION OF THE EMBODIMENT

The required program related information is obtained
 from the VPT-pages in teletext. (VPT Videorecorder Programming
 20 by Teletext). VPT-pages are TV-program schedule pages where
 all the data required for VCR programming are inserted and
 explicitly characterized by specific data formats. These data
 correspond to the VPS-data, transmitted on line 16.

It is therefore possible for a microcomputer to find the
 25 VPT-page containing the information related to the current
 program, by correlating the actual VPS-code with the incoming
 TXT-pages. The required procedures and the solution of the
 problem caused by the time constraints of the data transfer bus
 (IIC-bus) were presented in the above-mentioned European
 30 patent application EP 89106255.6.

The display of on-air time information is based on
 these VPT-pages. The well-defined assignments of the VPT-data
 allow one to derive the required information for display from
 these pages as soon as they are found.

35 The display of program-time information is based on
 the following definitions. The given explanations of the used
 terms are important for better understanding of the descriptions.

This is the replacement sheet

Date: 11 2 SEP 1996

On the VPT program pages each announced program has explicitly assigned to it the following data with their own characteristic format:

On-air time:

- 5 The on-air time is represented in single-time format (xx.xx) or in double-time format (xx.xx.-yy.yy). The later format defines both starting and end time.

Title of the program:

- 10 The title uses one or more teletext rows.

VPS-time:

The VPS-time format differs from the single-time format, in that it has no dot character between the hours and minutes (xxxx).

- 15 The most important difference between the VPS-time and the starting time is that the former is not changed in case of changes in the program schedule, while the latter matches the scheduled real on-air time.

- 20 Assignment of starting-time and end-time:

On-air time in single time format:

The end-time of a program is given by the starting-time of the following program on the VPT page. Otherwise, when there is no following program on that page, an additional time information, in single time format without a title must be present for this purpose, as shown in FIGURE 1a.

- 25

A starting-time with a VPS time 2500 is used to characterize a transmission pause. It also represents therefore the end-time of the previous program.

- 30

On-air time in double time format:

The end-time is explicitly contained in the double-time format, as shown in FIGURE 1b.

Assignment of on-air time and title:

- 35 The arrangement of on-air time (starting-time) and the corresponding title is fixed; first the on-air time and then the corresponding title. The end of a title is marked by the following starting time.

This is the replacement sheet

Date: 12 SEP 1996

Assignment of on-air time and VPS-time:

The arrangement of the VPS-times must correspond to the sequence of the announced programs (represented by their starting-times) on the VPT-page. (This also allows the block representation as shown in FIGURE 1c).

The system configuration shown in Fig. 2 is the same as in EP 89106255.6, with the exception of the video processor (data-slicer) SAA 5231. This is replaced by the video processor SDA 5645, which incorporates a VPS decoder, thus eliminating the separate VPS decoder previously used.

When the TV set is turned on or a new channel is selected, the microcomputer acts as described in EP 89106255.6. It first has to read the VPS code of the current program from the VPS-decoder. Then the teletext page that includes the actual TV program schedule (VPT page) has to be found in the incoming Teletext datastream. For this reason the same procedure has to be used as described in EP 89106255.6. When the corresponding page is found, the microcomputer also determines which row contains the starting-time and the first line of the title of the current program.

Next the end-time has to be found: This is trivial if the double-time format is used. Otherwise the microcomputer has to search for the starting-time of the following program, the starting-time of a transmission pause, or the next time format without a title should there be no following program on that page. A similar algorithm as used in EP 89106255.6 is employed to determine the number of lines of the title of the current program.

To display the remaining duration of the current program in addition to (or instead of) the end-time, the rolling time of the header is read and subtracted from the end-time.

Finally, the starting-time of the next program has to be found:

If the end-time of the current program was not obtained from the starting-time of the following program, the microcomputer has to search for this starting-time. Some complications occur if the following program is not listed on the

same page. This case has to be considered as the TV program schedule of one day is usually distributed over several pages.

Three different ways of distributing the TV program schedule on different pages exist:

5 Case 1:

on rolling pages with the same page number as shown in FIGURE 3a

Case 2:

10 on different pages with subsequent page numbers as shown in FIGURE 3b

Case 3:

on different pages with subsequent page numbers where each page can be a rolling page as shown in FIGURE 3c.

15

The present invention will be described with reference to the flowchart of FIGURE 4. It is not trivial to find the starting-time of the following program on other pages, as the VPS-code of this program is not known. Therefore, it is impossible to find that
20 page by using the procedure used to find the page with the current program. But the microcomputer can read the page number of the page with the current program. The following program has to be either on a rolling page with the same page number n or on a page with a page number $n+1$, which can also
25 have rolling pages. The microcomputer can therefore make a page request with page number n and another with page number $n+1$ (step 400).

The microcomputer then has to wait for the next appearance of page n (step 410). If, in step 420, a determination
30 is made that the next appearance of page n has the same content as its predecessor, the microcomputer concludes that there are no rolling pages under that page number and therefore the starting time of the following program is on a page with page number $n+1$ (checking the contents for correspondence is simply done by
35 applying the search algorithm used to find the title of the current program to the next page n . If the search algorithm again finds the actual current program, it must be the same page and there

This is the replacement sheet

Date: 12 SEP 1996

are no rolling pages on that page number). In that case, the routine advances to step 440.

5 If there are rolling pages, the microcomputer simply selects the first starting-time with a valid VPS-time from the next page n. At step 430 a check is made to see if this is an earlier time than the starting-time of the current program, the following program has to be searched on page n+1. If so, the routine advances to step 440. Otherwise, the selected time is the starting-time of the next program, and the routine advances to step 480.

10 If the starting-time has to be searched on page n+1, the microcomputer also has to select the first starting-time with a valid VPS time. Should there be a difference between the end-time of the current program and the selected time (step 450), the microcomputer checks if there are rolling pages (step 460) and
15 then selects the earliest time to display as starting-time of the next program (step 470).

FIGURES 5a and 5b show examples of program-related information displays displayed on a screen 510, 510' of a
20 television receiver 500, 500'. Current time of day is displayed (530, 530') as is station designation (520, 520')

The display (540, 540'), indicating the remaining duration, has to be updated during the time the microcomputer waits for the next appearance of pages, and if desired, the title of
25 the following program can also be displayed.

When the microcomputer has found and displayed the starting time of the following program, it has to check if any changes occur on the program schedule pages. In this case the displayed information has to be updated. Normally this
30 information is just displayed for a few seconds but updating is done in the background. Thus the information can be displayed on request immediately.

Thus has been described a program time display which is a useful feature for informing the TV viewer about the
35 end of the current program. It is particularly helpful when changes or delays in the program schedule occur.

Its realization requires only modification of the software needed for displaying station name and program title as

This is the replacement sheet

Date: 11 2 SEP 1996

known from EP 89106255.6. The procedure for finding the relevant program pages in the incoming Teletext data stream is identical.

This is the replacement sheet

Date: 12 SEP 1996

WHAT IS CLAIMED IS:

1. In a television signal processing system wherein the television signals include image representative information and a plurality of accompanying segments of supplementary information including program identification information, and a listing of program title information, program starting times, and program source information, the supplementary information being encoded during vertical blanking intervals of the broadcast signal with at least the program identification information being disposed within vertical blanking intervals of related image-representative information and further being included within said listing, signal processing apparatus comprising:

tuning means for selectively receiving television signals transmitted by individual program sources, the received signals including image-representative information and accompanying segments of supplementary information;

first signal decoder means for decoding said listing and said included program identification information;

memory means for storing and retrieving at least said program title information and included starting time information for the current program and starting time information for the next program decoded by said first signal decoder means;

a first controller means coupled to said first decoder means for selectively transferring said segments of supplementary information among said memory means, said first decoder means and said first controller means;

second signal decoder means for decoding said program identification information disposed within blanking intervals of related image-representative information;

said first controller means, upon initial reception of signals from an individual program source by said tuning means, sequentially causing said second signal decoder means to decode said program identification information accompanying related image-representative information, thereafter causing said first signal decoder means to identify the same program identification information within said listing and to store at least program title information of said listing in said memory means, said first controller means thereafter transferring said program title

This is the replacement sheet



Date: 12 SEP 1996

information from said memory means for display thereof along with related image-representative information; and characterized in that

said program identification information may appear on a page of data n of m pages of data, and may continue onto one of a second page also designated n (P401 am, P401 pm, P401 night) and a further page designated $n+1$ (P301, P302, P303), said second signal decoder means searches said pages (400, 410, 420, 430, 440, 450, 460, 470) and decodes said program information to retrieve one of

a) the starting time and ending time of the current program; and

b) the starting time of the current program and the starting time of a subsequent program;

said first signal decoder thereafter deriving and displaying (480) one of said ending time of the current program and the time remaining in the current program.

2. Signal processing apparatus according to Claim 1 characterized in that said second page also designated n (P401 am, P401 pm, P401 night) is a rolling page.

3. Signal processing apparatus according to Claims 1 or 2 characterized in that said listing comprises teletext information and said first signal decoder means comprises a teletext decoder system.

4. Signal processing apparatus according to Claim 3 characterized in that said second signal decoder means comprises a VPV or VPT decoder system.

5. Signal processing apparatus according to Claim 3 characterized in that said first controller means provides first control signals to said first signal decoder means, upon initial reception of a running program, to cause said first signal decoder means to search teletext transmissions for program identification information matching corresponding information provided by said second signal decoder means.



This is the replacement sheet

Date: 12 SEP 1996

6. Signal processing apparatus according to Claim 5 characterized in that said second signal decoder means comprises a VPV or VPT decoder system.

7. Signal processing apparatus according to Claim 5 characterized in that said first controller means transfers (480) program source information, program starting time information and one of program ending time and time remaining in said current program (540) , from said memory means for display along with said program title information.

8. A method of processing television signals wherein the television signals include image-representative information and a plurality of segments of accompanying supplementary information including program identification information having a time component, and a listing including program title information and program source information, the supplementary information being encoded during vertical blanking intervals of the television signal with at least the program identification information being disposed within vertical blanking intervals of related image-representative information and further being included within the listing, the method comprising:

tuning a television signal processor for selectively receiving signals transmitted by an individual program source, the received signals including said image-representative information and accompanying segments of supplementary information;

decoding said listing and said included program identification information;

storing said decoded listing and included program identification information for subsequent retrieval;

decoding said program identification information disposed within blanking intervals of related image-representative information;

comparing said last-named program identification information with said included program identification information to identify matching information; and

This is the replacement sheet



Date: 12 SEP 1996

displaying at least program title information accompanying said included identification information upon identifying matching program identification information; and characterized by the additional steps of:

searching for information on rolling pages and subsequent pages to derive ending time information for the current program by,

reading again (400, 410) a page of data bearing the same designation as the previously-read page of data of said listing;

determining (420) if said read-again page of data is the same as said previously-read page or a rolling page;

reading (440) a subsequent page of data if said read-again page of data is the same as said previously-read page of data;

determining an ending time from one of an explicit ending time and the starting time of a subsequent program (450, 460, 470).



This is the replacement sheet

Date: 12 SEP 1996

APPARATUS FOR PROVIDING TV PROGRAM INFORMATION

ABSTRACT

5 A known system derives information from the VPS-
and Teletext signals and displays the title of the current program
and the network name on screen for a few seconds, each time a
new channel is selected. The VPS- and Teletext signals contain
more program-related information than mentioned above. The
present invention concerns deriving (400, 410, 420, 430, 440,
10 450, 460, 470) the end-time and/or the remaining duration of the
current program as well as the starting-time of the next program
for display (480) on-screen.

FIGURE 2

This Sheet Has Been Replaced



This is the replacement sheet

Date: 1 2 SEP 1996

P402	402	CH-TEXT	15.02.90	14:25:03
SRG	TV-DRS	Donnerstag	15. Februar	1990
24101 150290 CF				
08.30	0830	Schulfernsehen: Geographie		
09.20	0920	Reise durch unseren Körper		
09.50	2500	Ende / Pause		
12.55	1255	Nachrichten		
13.00	1300	Ein Heim für Tiere		
13.55	1355	Zeitspiegel: Herrschen des goldenen Dreiecks		
14.45	1445	MTW		
15.40				

a)
SINGLE TIME FORMAT

P302	302	ARD / ZDF	15.2.90	14.50.17
ZDF	Nachmittagsprogramm		15. Februar 1990	
			10101	150290 3A
13.45	- 14.15	Reisebilder aus der DOR		
1345				
14.15	- 15.15	Die grossen Pianisten		
1415	Vladimir Horowitz			
16.00	- 16.05	Heute		
1600				
17.00	- 17.45	Rene Kollo		
1700	Ich lad gern mir Gäste ein			
17.45	- 18.00	Tele-Illustrierte		
1745	anschl. Länderspiegel			
18.00	- 18.05	Heute		
1800				

b)
DOUBLE TIME FORMAT

P501	501	CH-TEXT	15.02.90	14:55:35
SRG	TV-DRS	Donnerstag	15. Februar	1990
24107 150290 81 1000 1015 1400 1600 1700 1800 1930				
10.00	Frühnachrichten			
10.15 - 12.15	Frühfilm			
14.00	Mittagsnachrichten			
14.15	Mittagsfilm			
16.00	Programmvorschau			
17.00 - 17.15	Abendnachrichten			
18.00 - 18.45	Serie			
19.30 - 20.00	Tagesschau			

concealed VPT data

c)
BOTH TIME FORMATS WITH
BLOCK REPRESENTATION
OF CONCEALED VPT-DATA

FIG.1

This is the replacement sheet

Date: 1 2 SEP 1996



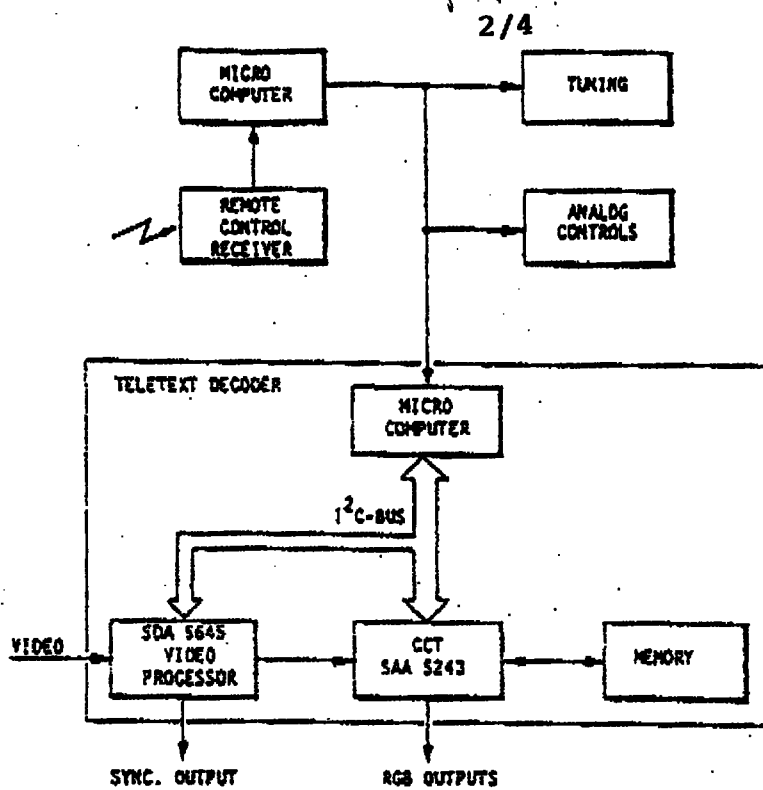



FIG.2



a) ROLLING PAGES



b) DIFFERENT PAGES WITH SUBSEQUENT PAGENUMBERS

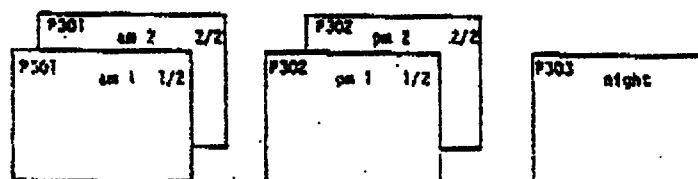

c) DIFFERENT PAGES WITH SUBSEQUENT PAGENUMBERS, WHERE EACH PAGE CAN BE A ROLLING PAGE

FIG.3

This is the replacement sheet

Date: 1 2 SEP 1996

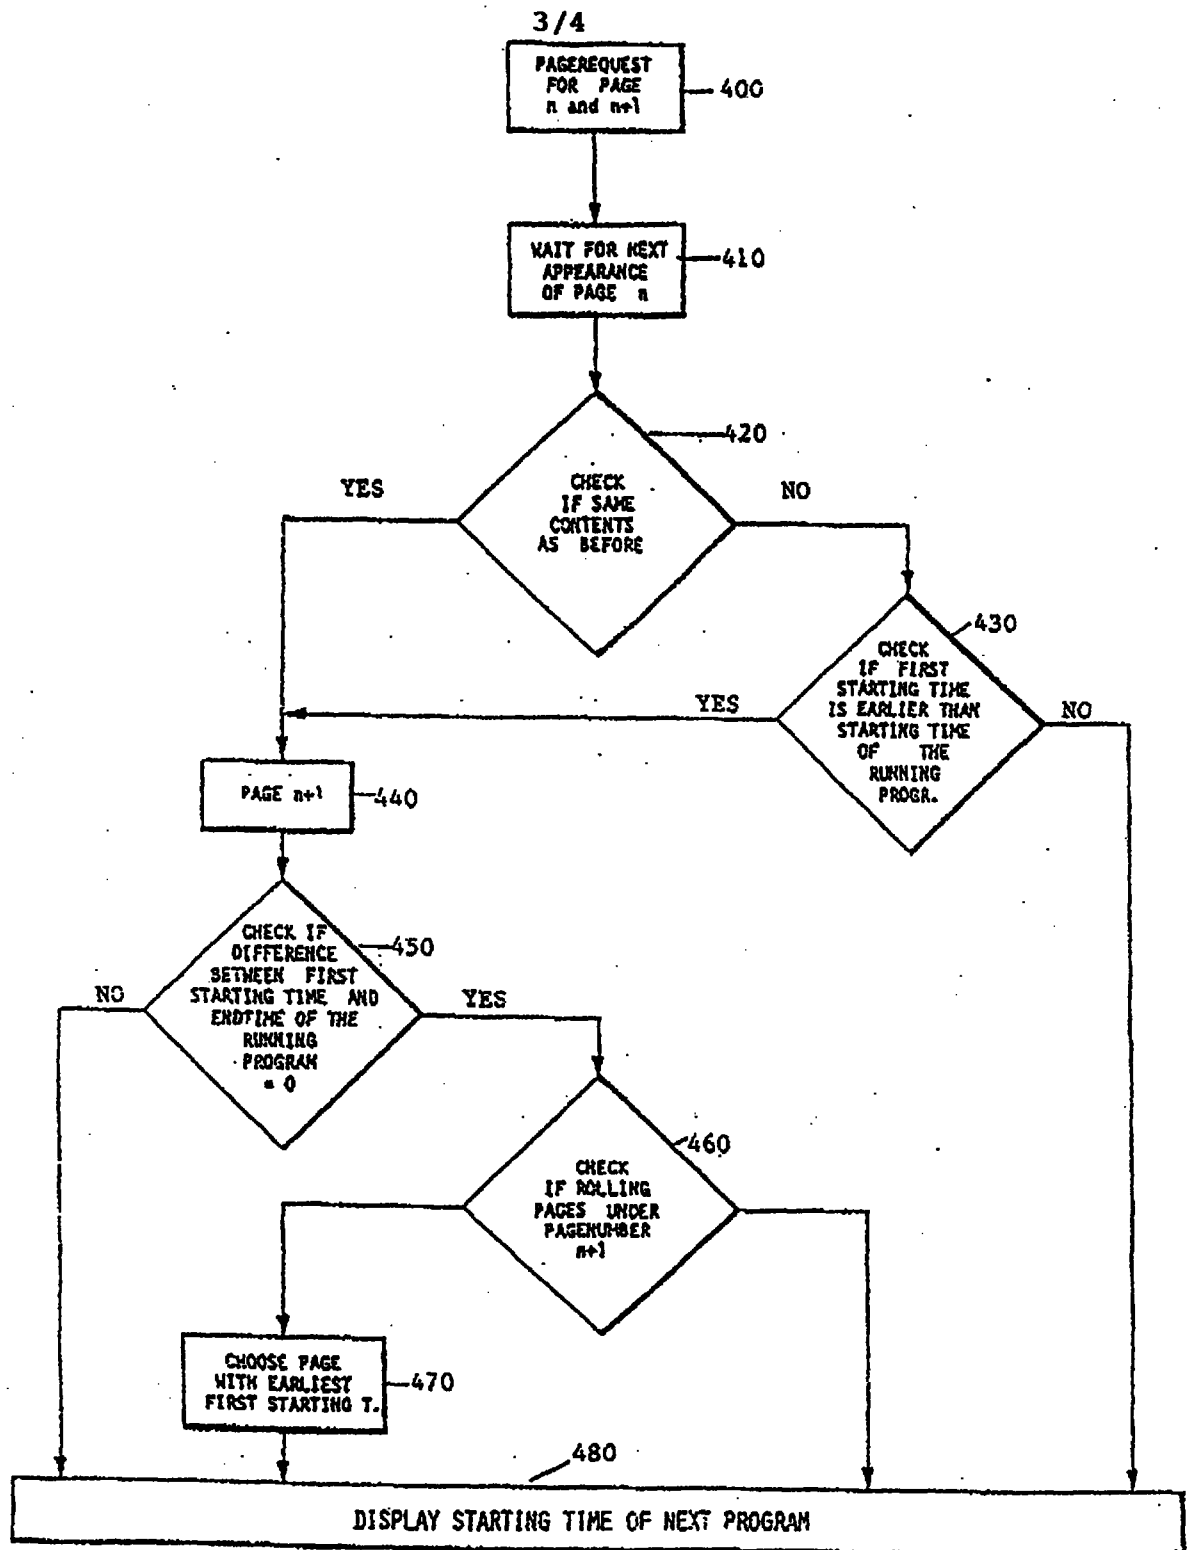


FIG.4

This is the replacement sheet

Date: 1 2 SEP 1996

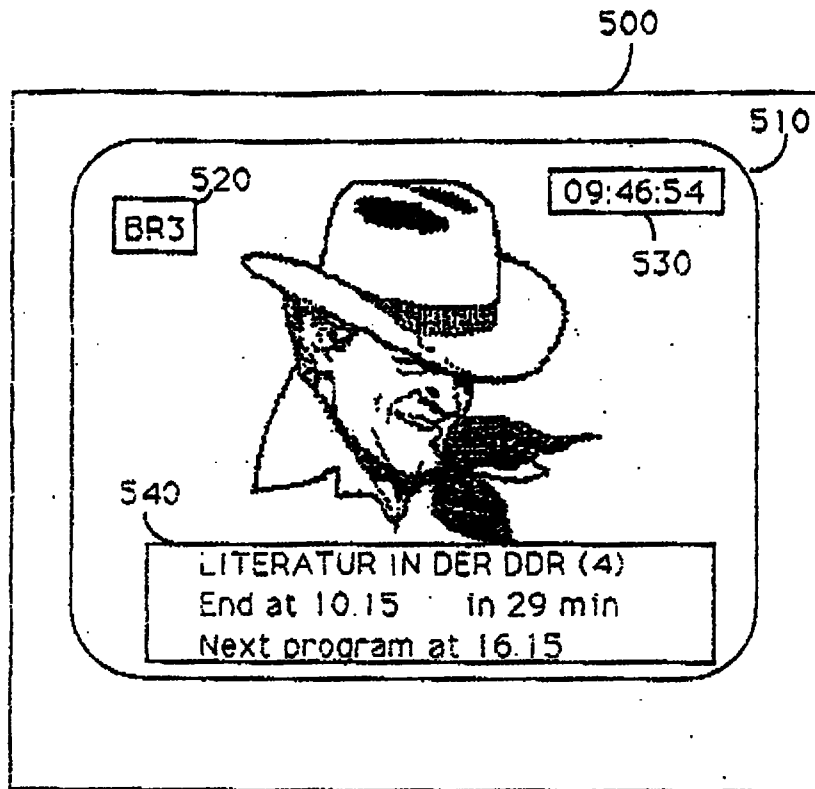


Fig. 5a

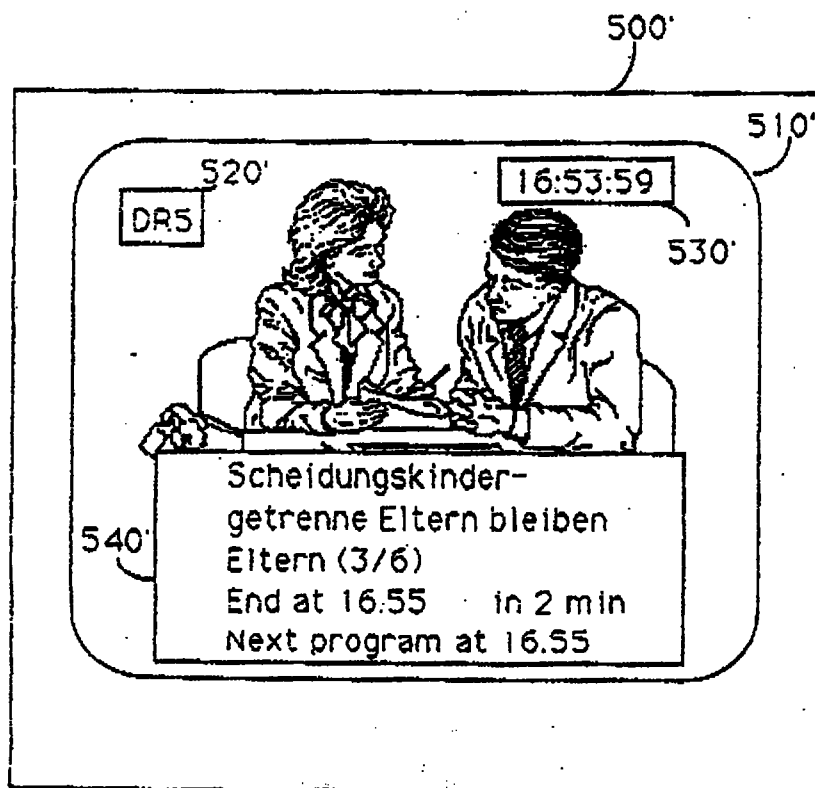


Fig. 5b

This is the replacement sheet

Date:

12 SEP 1996



TEXT OF THE ABSTRACT

APPARATUS FOR PROVIDING TV PROGRAM INFORMATION

A known system derives information from the VPS- and Teletext signals and displays the title of the current program and the network name on screen for a few seconds, each time a new channel is selected. The VPS- and Teletext signals contain more program-related information than mentioned above. The present invention concerns deriving the end-time and/or the remaining duration of the current program as well as the starting-time of the next program for display on-screen.

Figure 2.

