



(43) International Publication Date
15 August 2013 (15.08.2013)

- (51) International Patent Classification:
H04R 25/00 (2006.01)
- (21) International Application Number:
PCT/EP2012/052000
- (22) International Filing Date:
7 February 2012 (07.02.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **WIDEX A/S** [DK/DK]; Nymoellevej 6, DK-3540 Lynge (DK).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ANDERSEN, Svend Vitting** [DK/DK]; Nymoellevej 6, DK-3540 Lynge (DK). **WESTERGAARD, Anders** [DK/DK]; Nymoellevej 6, DK-3540 Lynge (DK).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HEARING AID FITTING SYSTEM AND A METHOD OF FITTING A HEARING AID SYSTEM

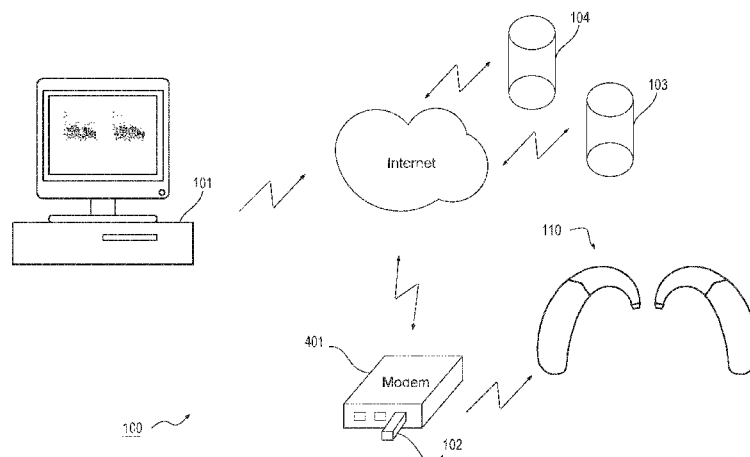


Fig. 4

(57) Abstract: A hearing aid fitting system (100, 200, 300) adapted for remote fitting of a hearing aid system (110), wherein a direct communication channel between a hearing aid fitting part and an external device (102, 302), adapted to communicate directly with the hearing aid system (110), is established by a control server (103) based on unique identifications of the hearing aid user and the external device and/or the hearing aid system. The invention also provides a method of remote fitting of a hearing aid system.