

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 November 2007 (29.11.2007)

PCT

(10) International Publication Number
WO 2007/136388 A1

(51) International Patent Classification:
E04D 13/03 (2006.01)

(21) International Application Number:
PCT/US2006/030793

(22) International Filing Date: 7 August 2006 (07.08.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/438,178 22 May 2006 (22.05.2006) US

(71) Applicant (for all designated States except US): **SO-LATUBE INTERNATIONAL, INC.** [US/US]; 2210 Oak Ridge Way, Vista, CA 92083 (US).

(72) Inventor: **RILLIE, David, W.**; 700 W. Harbor Drive #1705, San Diego, CA 92101 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JASTER, Paul** [US/US]; 3525 Corte Lupe, Carlsbad, CA 92009 (US).


(74) Agent: **ROGITZ, John, L.**; Rogitz & Associates, 750 B Street, Suite 3120, San Diego, CA 92101 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SKYLIGHT TUBE WITH REFLECTIVE STRUCTURED SURFACE

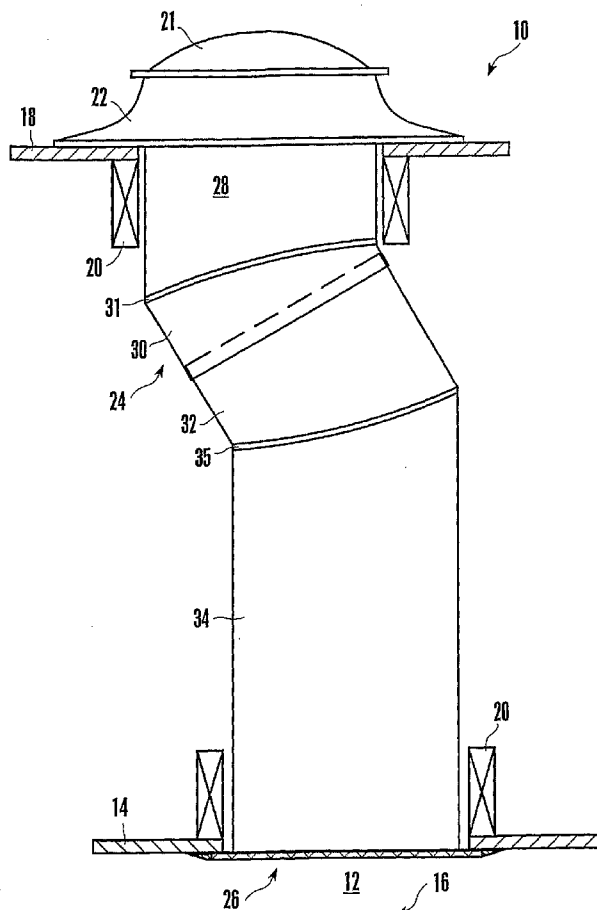

(57) Abstract: A skylight shaft substrate (24, 40, 60) is rendered internally reflected in several ways. To limit the formation of focal points that can lead to hot spots as light travels down the shaft, the shaft substrate (24, 40, 60) is formed with dimples (62) or longitudinal corrugations (42).

WO 2007/136388 A1

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.