



- (51) **International Patent Classification:**
F17C 7/04 (2006.01) *F17C 9/04* (2006.01)
- (21) **International Application Number:**
PCT/US2013/069480
- (22) **International Filing Date:**
11 November 2013 (11.11.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/674,722 12 November 2012 (12.11.2012) US
- (71) **Applicant:** FLUOR TECHNOLOGIES CORPORATION [US/US]; 3 Polaris Way, Aliso Viejo, California 92698 (US).
- (72) **Inventor:** MAK, John; 2242 Salt Air Drive, Santa Ana, California 92705 (US).
- (74) **Agents:** FESSENMAIER, Martin et al.; Fish & Associates, PC, 2603 Main Street, Ste 1000, Irvine, California 92614 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

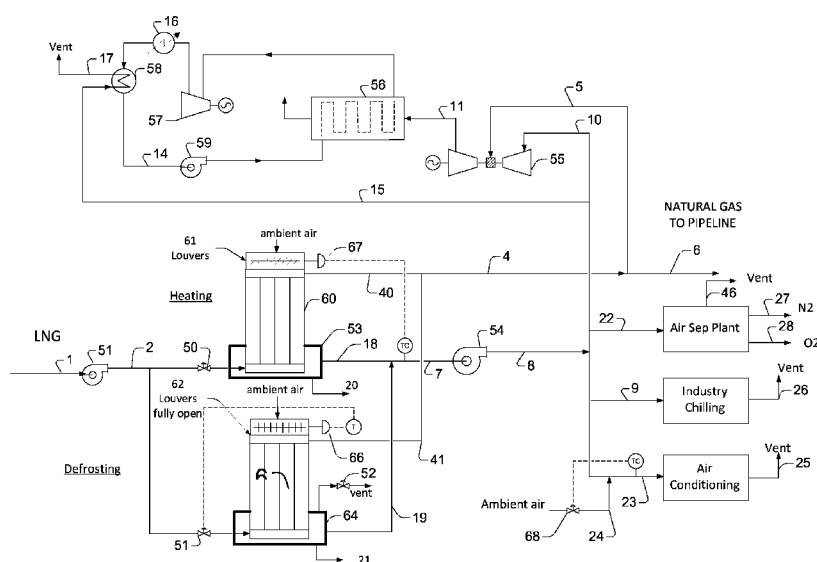
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** CONFIGURATIONS AND METHODS FOR AMBIENT AIR VAPORIZERS AND COLD UTILIZATION

**Figure 1**

- (57) **Abstract:** An ambient air LNG vaporizer has a housing that encloses the exchanger conduits and provides a stream of refrigerated air to a blower to so convey refrigerated air to one or more remote refrigerated air consumers. The temperature of the refrigerated air is maintained using a control circuit that adjusts an operational parameter of an ambient air intake control device of the housing and/or the blower.