



(51) International Patent Classification:

B66B 7/06 (2006.01) **D07B 1/14** (2006.01)
B66B 7/12 (2006.01)

(21) International Application Number:

PCT/FI2013/050306

(22) International Filing Date:

19 March 2013 (19.03.2013)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data:

20125318 22 March 2012 (22.03.2012) FI

(71) Applicant: **KONE CORPORATION** [FI/FI]; Kartanontie 1, FI-00330 Helsinki (FI).

(72) Inventors: **ALASENTIE, Pentti**; Huvilaharju 33, FI-02730 Espoo (FI). **KERE, Petri**; Sotkamonkuja 8, FI-00560 Helsinki (FI). **PURANEN, Mikko**; Paraistentie 19 A 22, FI-00280 Helsinki (FI).

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(54) Title: TRAVELLING CABLE OF AN ELEVATOR, AND AN ELEVATOR

Fig. 3

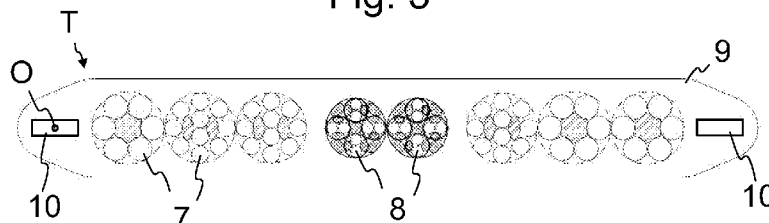

(57) Abstract: The invention relates to the travelling cable (T) of an elevator, more particularly of a passenger transport elevator and/or freight transport elevator, which travelling cable (T) comprises a protective envelope (9), conductors (7, 8) for transmitting electrical energy and data between the elevator car and the elevator hoistway, and one or more load-bearing bearer parts (10) of essentially the length of the travelling cable for fixing the travelling cable (T) at its first end to the elevator car and at its second end to the elevator hoistway, and which bearer part (10) comprises glass-fiber reinforcements and/or aramid-fiber reinforcements and/or carbon-fiber reinforcements and/or polybenzoxazole-fiber reinforcements and/or polyethylene-fiber reinforcements and/or nylon-fiber reinforcements in a polymer matrix material, and also an elevator.