



(51) International Patent Classification:
H04W 80/02 (2009.01) **H04L 1/18** (2006.01)

MARTIN, Brian [GB/GB]; 67 Bricksbury Hill, Farnham
Surrey GU9 0LY (GB).

(21) International Application Number:
PCT/FI2009/051039

(74) Agent: **NOKIA CORPORATION**; IPR Department,
Virpi Tognetty, Keilalahdentie 4, FI-02150 Espoo (FI).

(22) International Filing Date:
28 December 2009 (28.12.2009)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/363,001 30 January 2009 (30.01.2009) US

(71) Applicant (for all designated States except US): **NOKIA
CORPORATION** [FI/FI]; Keilalahdentie 4, FI-02150
Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHARLES,
Alexander Graham** [GB/GB]; 28 Saddleback Way, Fleet
GU51 2US (GB). **KUBOTA, Keiichi** [JP/GB]; 71A
Thames Street, Weybridge Surrey KT13 8LP (GB).

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: METHOD, APPARATUS AND COMPUTER PROGRAM PRODUCT FOR PROVIDING CIPHERING PROBLEM
RECOVERY FOR UNACKNOWLEDGED MODE RADIO BEARER

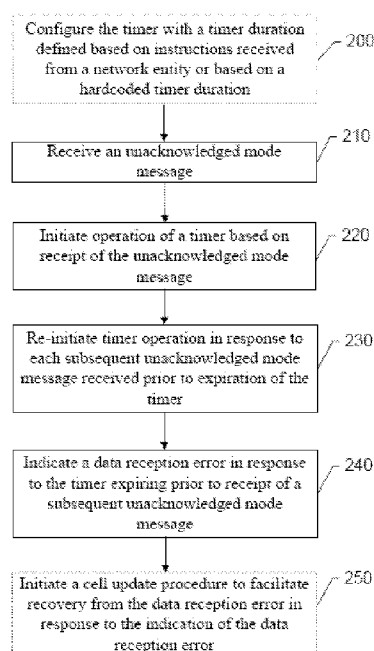


FIG. 7.

(57) Abstract: An apparatus for providing ciphering problem detection may include a processor. The processor may be configured to receive an unacknowledged mode message, initiate operation of a timer based on receipt of the unacknowledged mode message, re-initiate timer operation in response to each subsequent unacknowledged mode message received prior to expiration of the timer, record a timer expiry event in response to the timer expiring prior to receipt of a subsequent unacknowledged mode message, and indicate a data reception error in response to receipt of the subsequent unacknowledged mode message after recordation of the timer expiry event.



ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, **Published:**

MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, — *with international search report (Art. 21(3))*

ML, MR, NE, SN, TD, TG).