



(51) International Patent Classification:

B22F 5/10 (2006.01) *B33Y 10/00* (2015.01)
B22F 10/22 (2021.01) *B33Y 70/00* (2020.01)
B22F 10/60 (2021.01) *B33Y 80/00* (2015.01)
B22F 10/80 (2021.01)

(21) International Application Number:

PCT/IL2024/050880

(22) International Filing Date:

02 September 2024 (02.09.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

305708 05 September 2023 (05.09.2023) IL

(71) Applicant: **RAFAEL ADVANCED DEFENSE SYSTEMS LTD.** [IL/IL]; P.O.B. 2250, 3102102 Haifa (IL).

(72) Inventors: **SHACHAM, Omri**; P.O.B. 2250, 3102102 Haifa (IL). **BEN-HORIN, Ronen**; 5 Moshe Soroka street, 3478905 Haifa (IL).

(74) Agent: **LUZZATTO, Kfir** et al.; LUZZATTO & LUZZATTO, P.O. BOX 5352, 8415202 Beer Sheva (IL).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,

(54) Title: IMPROVED MIRROR DESIGN AND MANUFACTURING PROCESS FOR OPTOMECHANICAL SYSTEMS

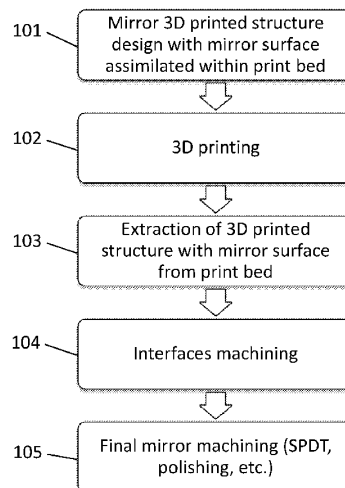


Fig. 1

(57) Abstract: The present invention relates to a method for manufacturing a 3D-printed object, comprising: a) printing a 3D object on a printing bed, wherein at least a part of the 3D object is integrated with a portion of the printing bed; and b) extracting the portion of the printing bed integrated with the 3D object to form a 3D printed object with a mirror surface assimilated within the portion of the printing bed.

[Continued on next page]

SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*