

(43) International Publication Date
26 August 2010 (26.08.2010)(10) International Publication Number
WO 2010/096009 A1(51) International Patent Classification:
E05B 19/02 (2006.01) *E05B 27/10* (2006.01)
E05B 19/04 (2006.01)(21) International Application Number:
PCT/SE2010/050189(22) International Filing Date:
18 February 2010 (18.02.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0900207-2 18 February 2009 (18.02.2009) SE
PCT/SE2010/050006
4 January 2010 (04.01.2010) SE(71) Applicant (for all designated States except US): **WIN-LOC AG** [CH/CH]; P.O. Box 4233, Baarerstrasse 43, CH-6304 Zug (CH).

(72) Inventor; and

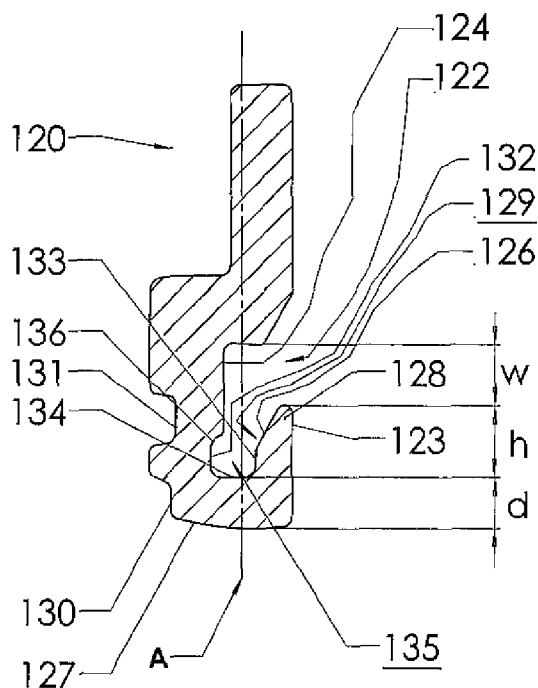
(75) Inventor/Applicant (for US only): **WIDÉN, Bo** [SE/SE]; Björkvägen 16B, S-644 36 Torshälla (SE).(74) Agents: **MODIN, Jan** et al.; Noréns Patentbyrå AB, Box 10198, S-100 55 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: PROFILED KEY FOR CYLINDER LOCKS

Fig 7

(57) Abstract: A key for use in a cylinder lock with a rotatable key plug having a profiled key way. The key comprises an elongated, substantially flay key blade (120; 120') having a longitudinal profile groove (122; 122') extending along at least a portion of the length of the key blade. The groove has an undercut portion (129) adjacent to a ridge portion (128, 128'), the outside of which forms part of a side surface (123; 123') of the key blade. The undercut portion (129; 129') of the groove is expanded, at its innermost part adjacent to and inside said ridge portion, into a longitudinally extending pocket (135; 135').



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, **Published:**

TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*