

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 September 2008 (25.09.2008)

PCT

(10) International Publication Number
WO 2008/115048 A1

(51) International Patent Classification:
F16L 37/12 (2006.01) **F16L 37/62** (2006.01)

(21) International Application Number:
PCT/NL2008/000081

(22) International Filing Date: 14 March 2008 (14.03.2008)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1033558 19 March 2007 (19.03.2007) NL

(71) Applicant (for all designated States except US): **KANON
LOADING EQUIPMENT B.V.** [NL/NL]; Edisonweg 27,
NL-3899 AZ Zeewolde (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JANSSEN, Albert**
[NL/NL]; Den Bramel 45, NL-7339 JE Ugchelen (NL).

(74) Agent: **DOKTER, Hendrik, Daniël**; Octrooibureau Dok-
ter, P.O. Box 657, NL-7300 AR Apeldoorn (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC,
LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN,
MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(54) Title: COUPLING DEVICE FOR A MARINE LOADING ARM

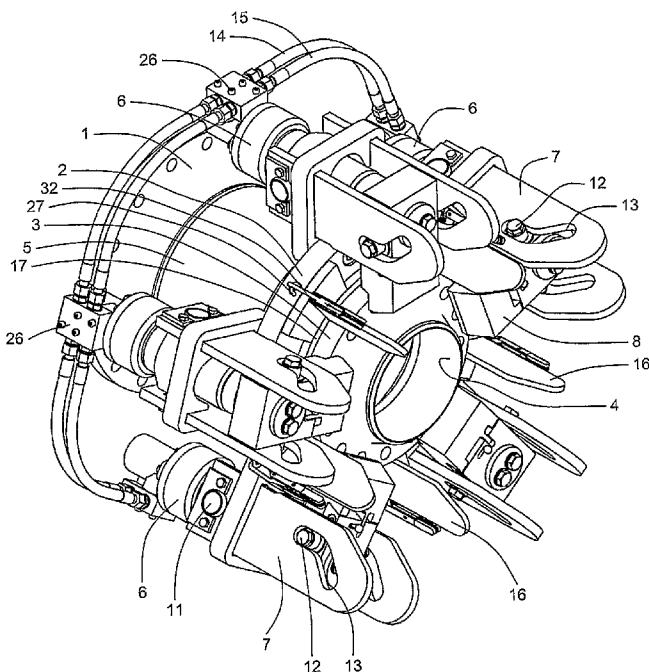


Fig. 1

(57) Abstract: Coupling device (10) for coupling a loading arm, for instance a marine loading arm, to an inlet/outlet conduit (4) of a liquid container, comprising a cylindrical tube (5) with a first inner diameter which is provided at a first end with a first flange (1) which can be coupled to the loading arm and is provided at a second end with a second flange (2) and with rapid-action coupling means (6, 7, 8) for coupling the inlet/outlet conduit to the tube, wherein the rapid-action coupling means are adapted to couple an inlet/outlet conduit having a second inner diameter smaller than the first inner diameter.

WO 2008/115048 A1