

FIG. 1C




FIG. 1B




FIG. 1A

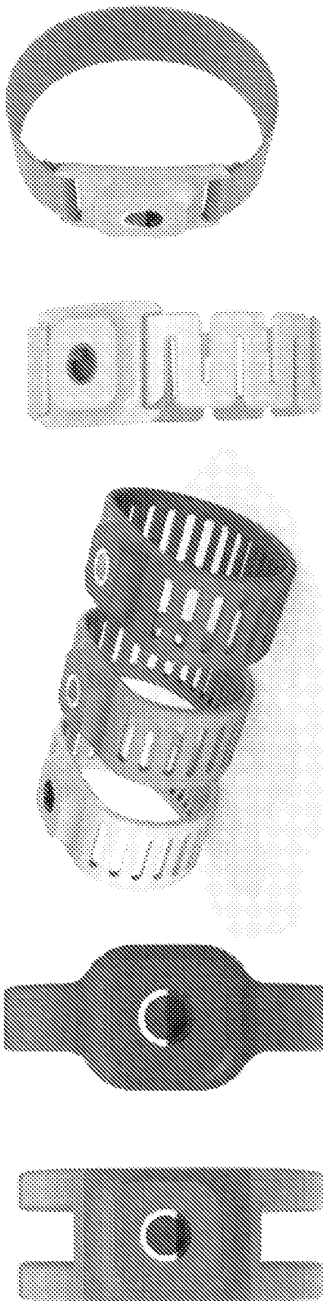


FIG. 2A

FIG. 2B

FIG. 2C

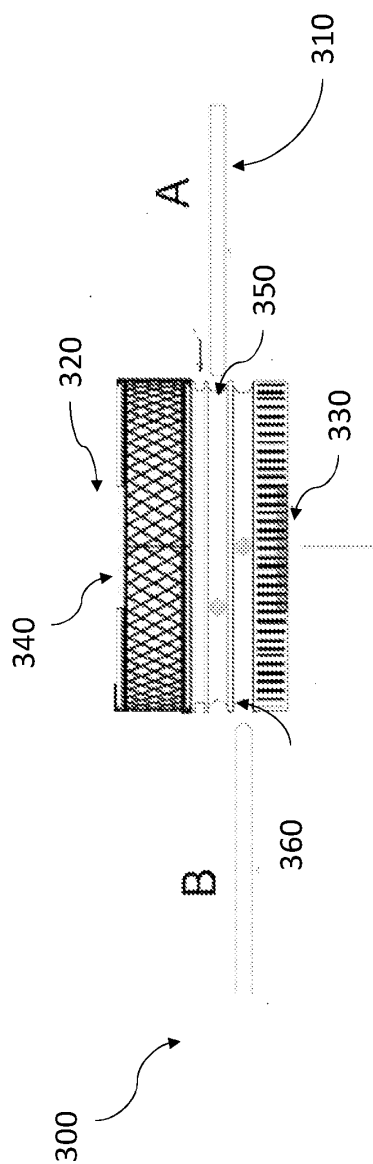


FIG. 3A

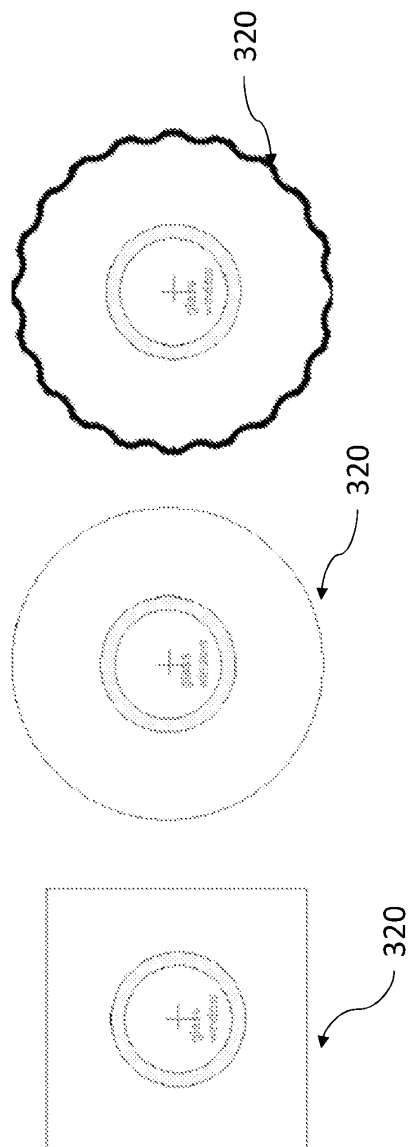


FIG. 3B

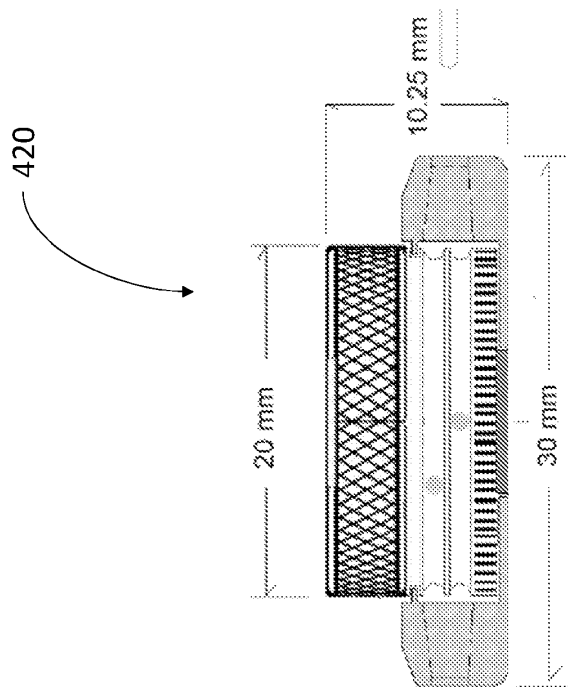


FIG. 4

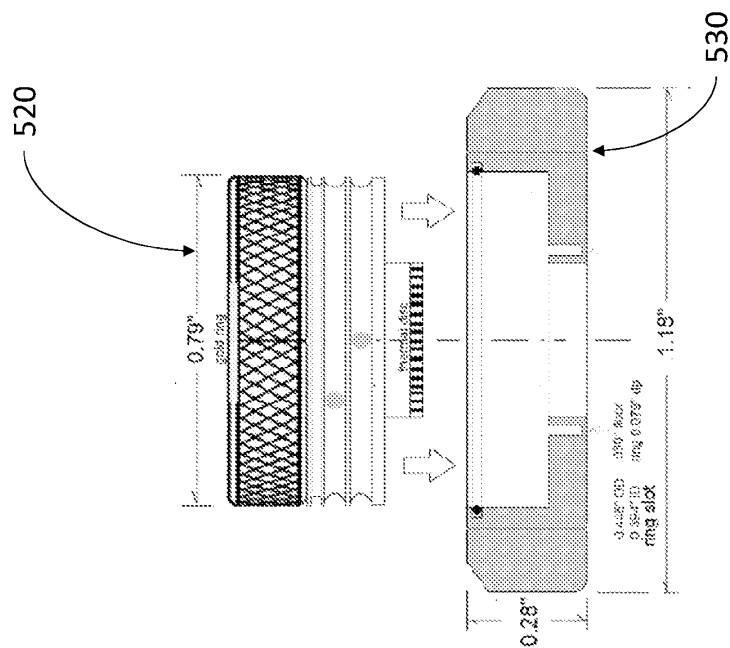


FIG. 5A

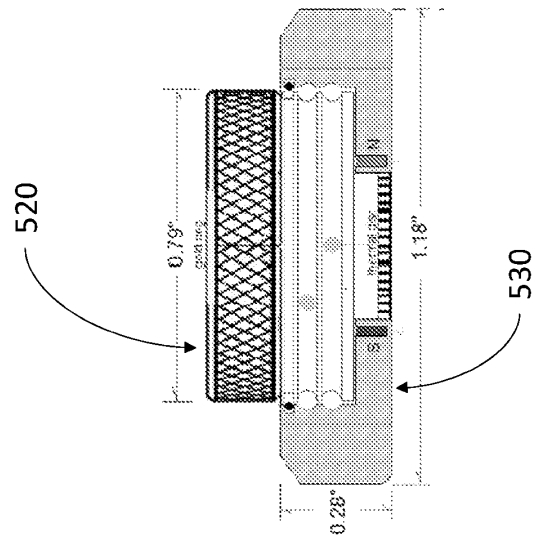


FIG. 5B

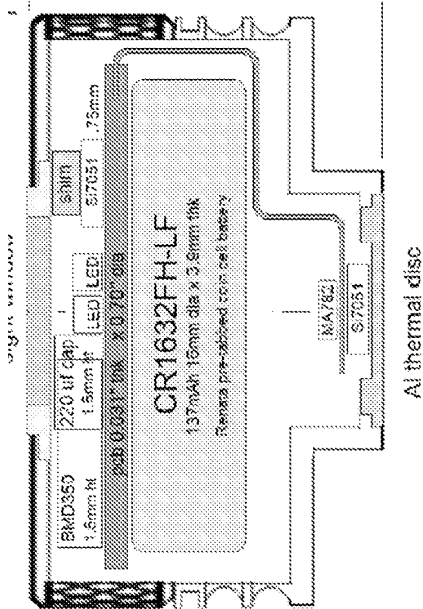


FIG. 6A

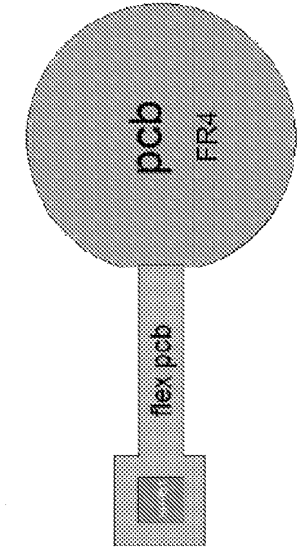


FIG. 6B

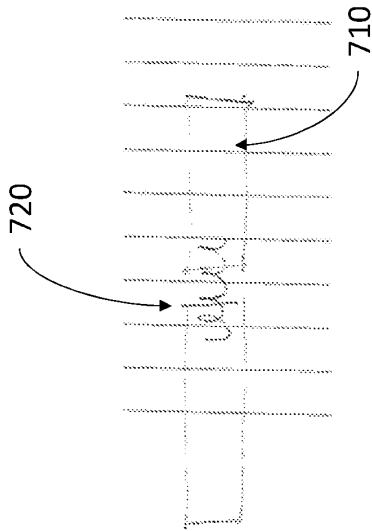


FIG. 7

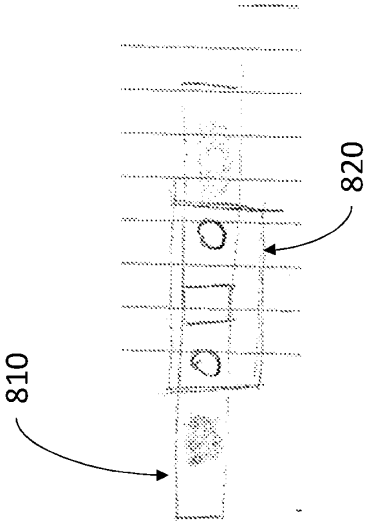


FIG. 8

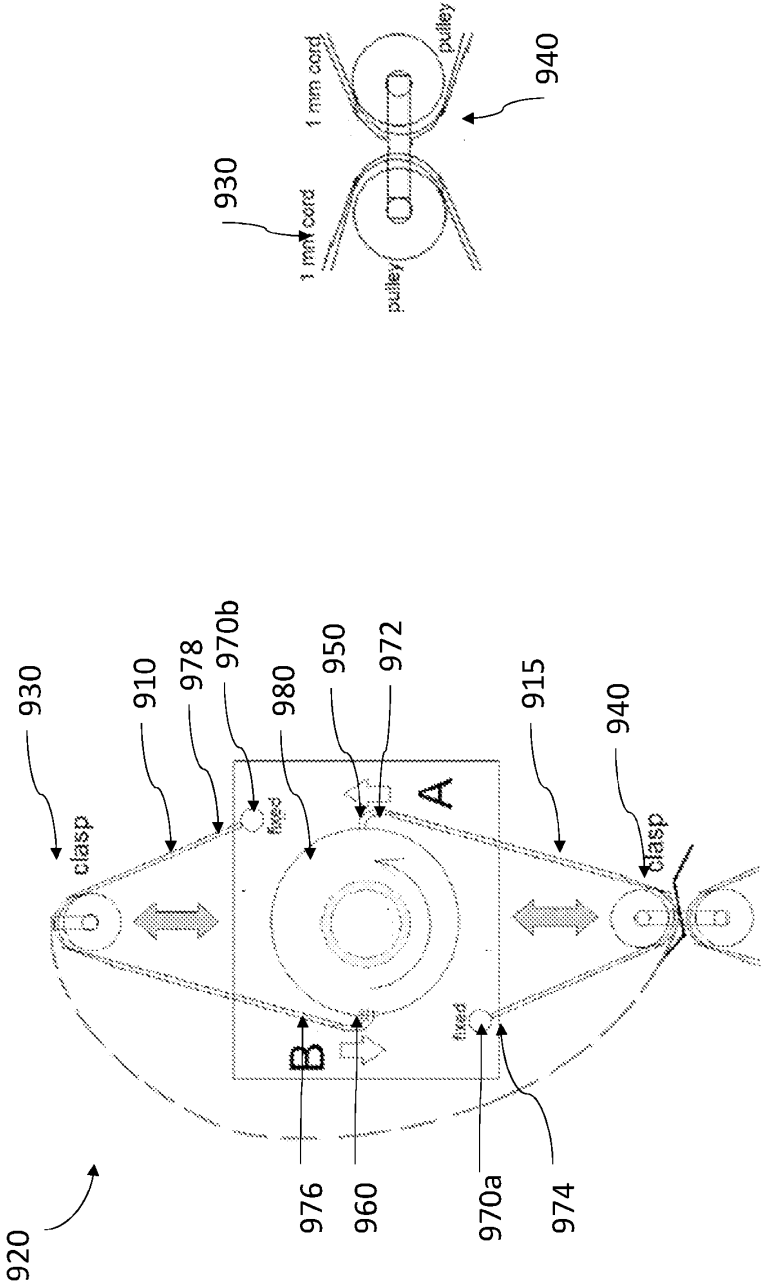


FIG. 9A

FIG. 9B

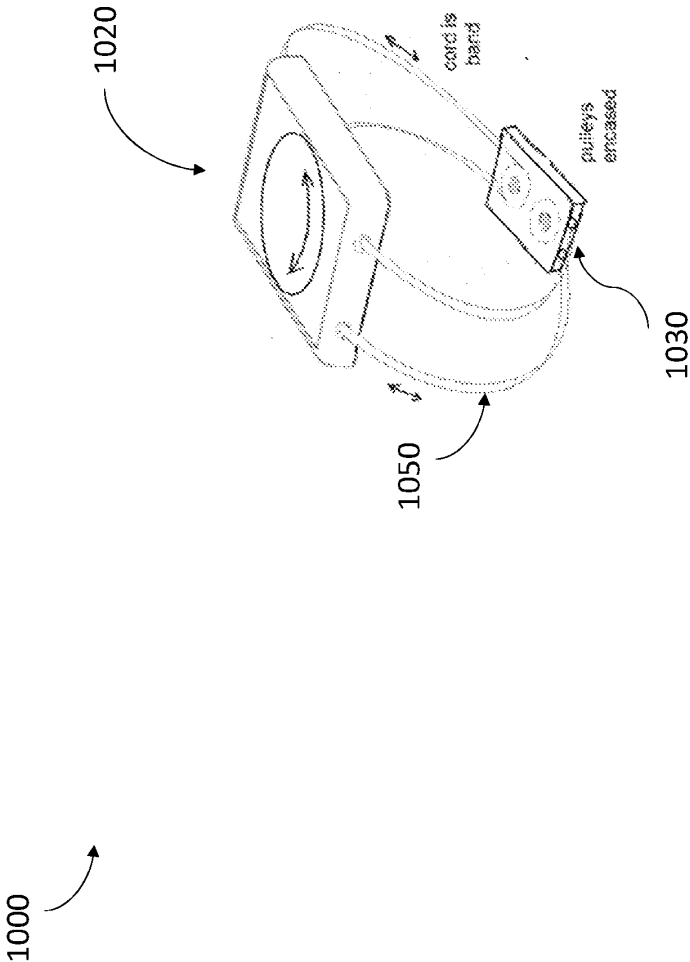
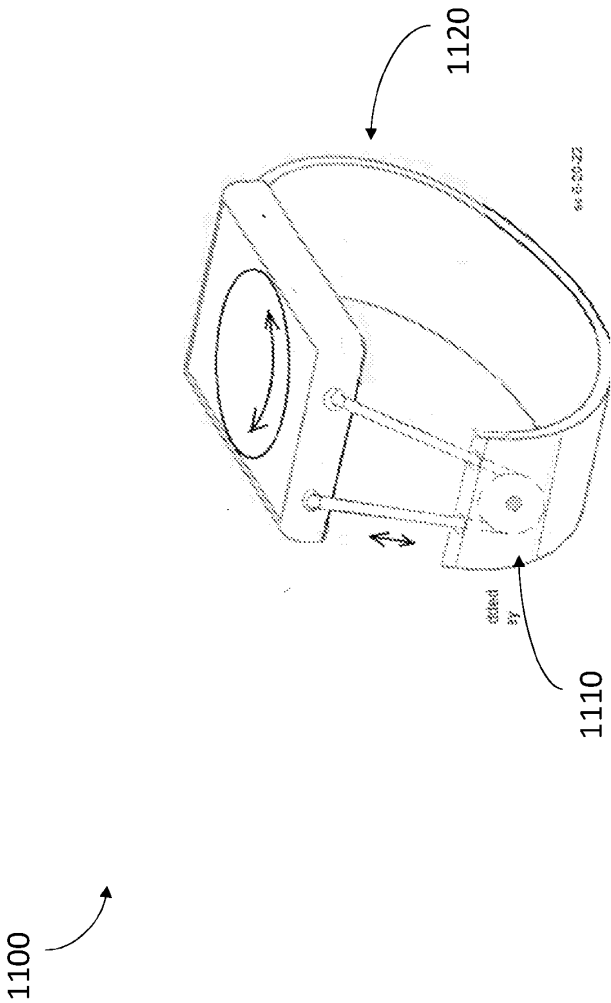


FIG. 10



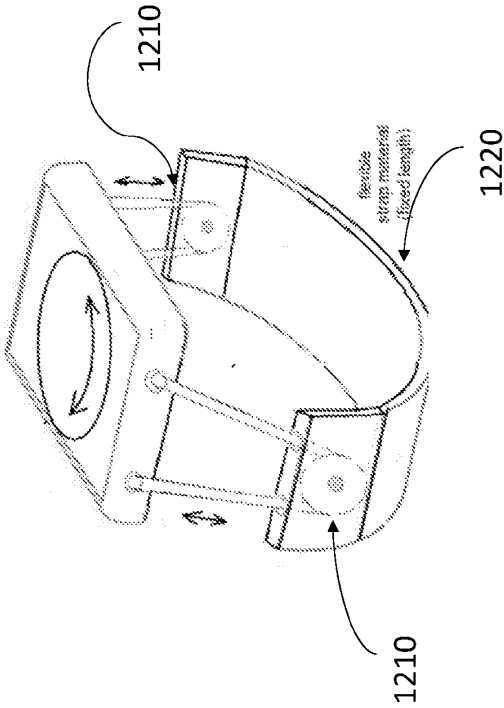
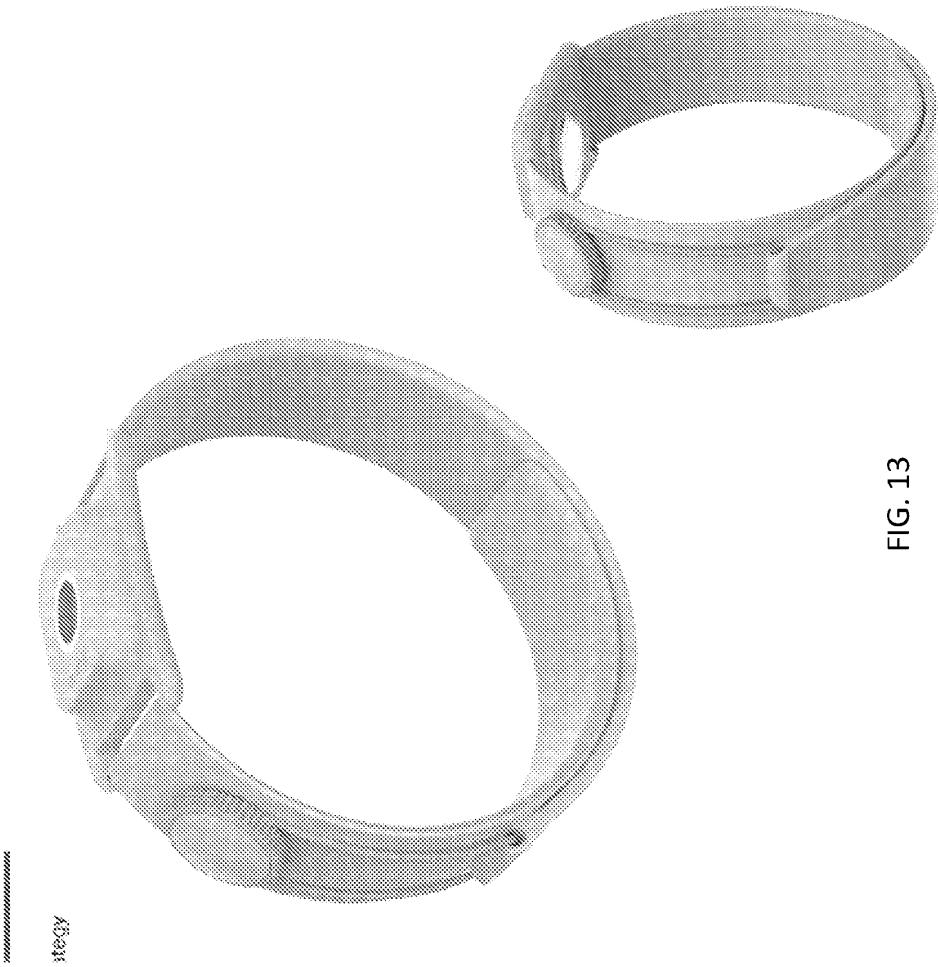


FIG. 12



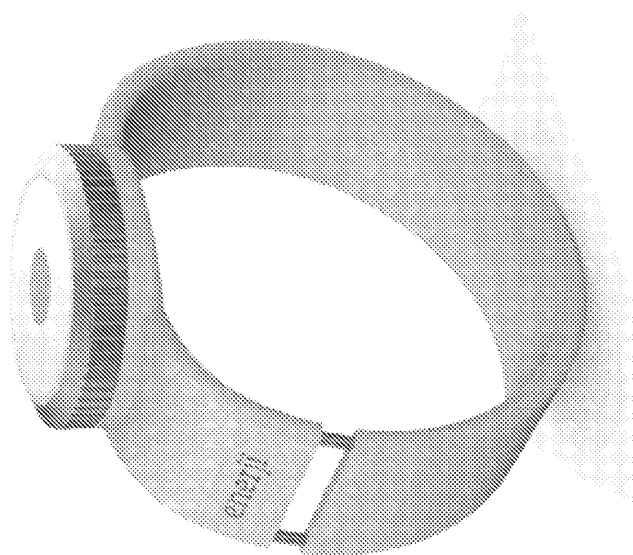


FIG. 14

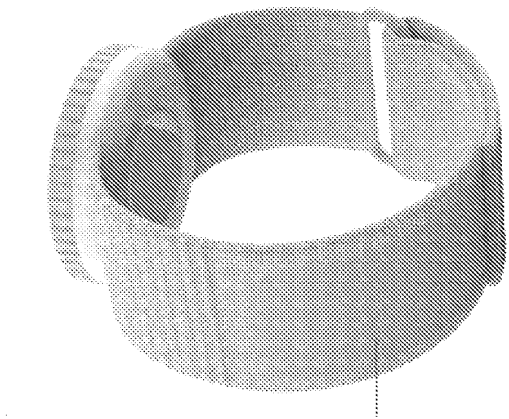
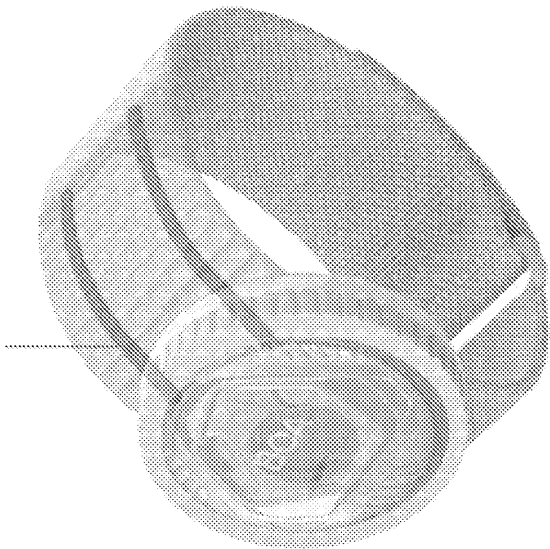


FIG. 15



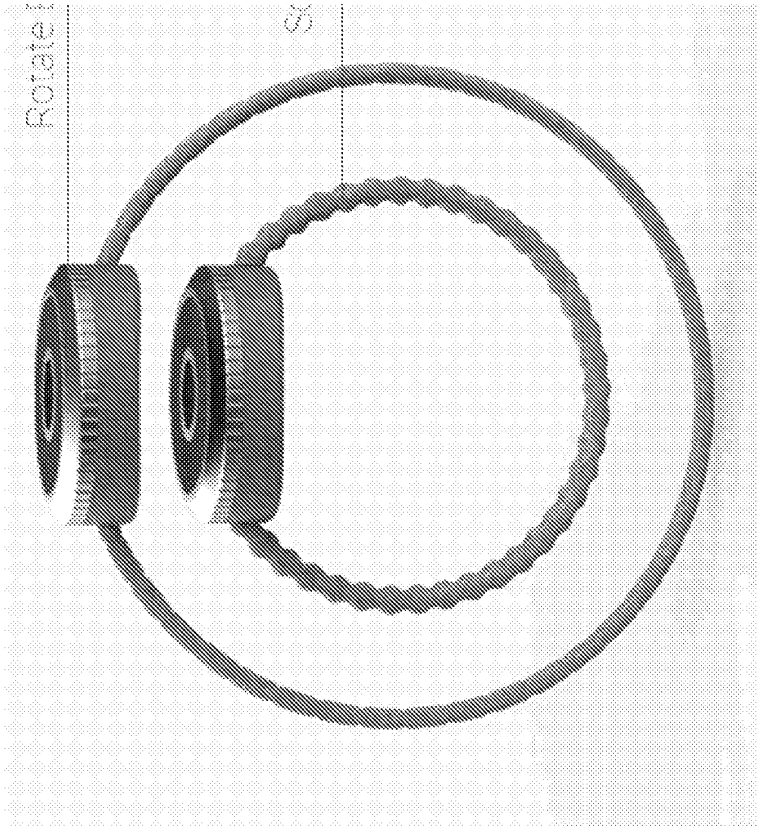


FIG. 16

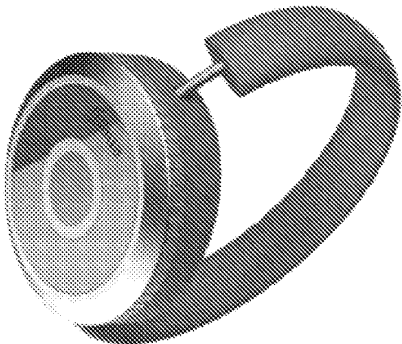
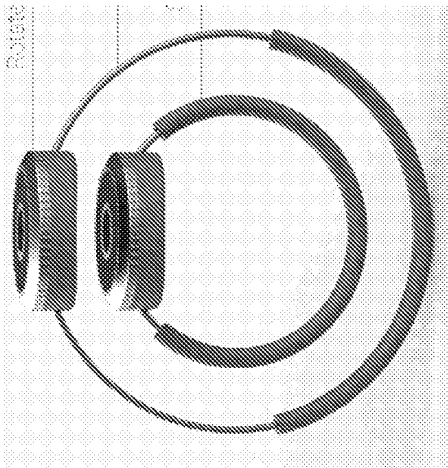


FIG. 17






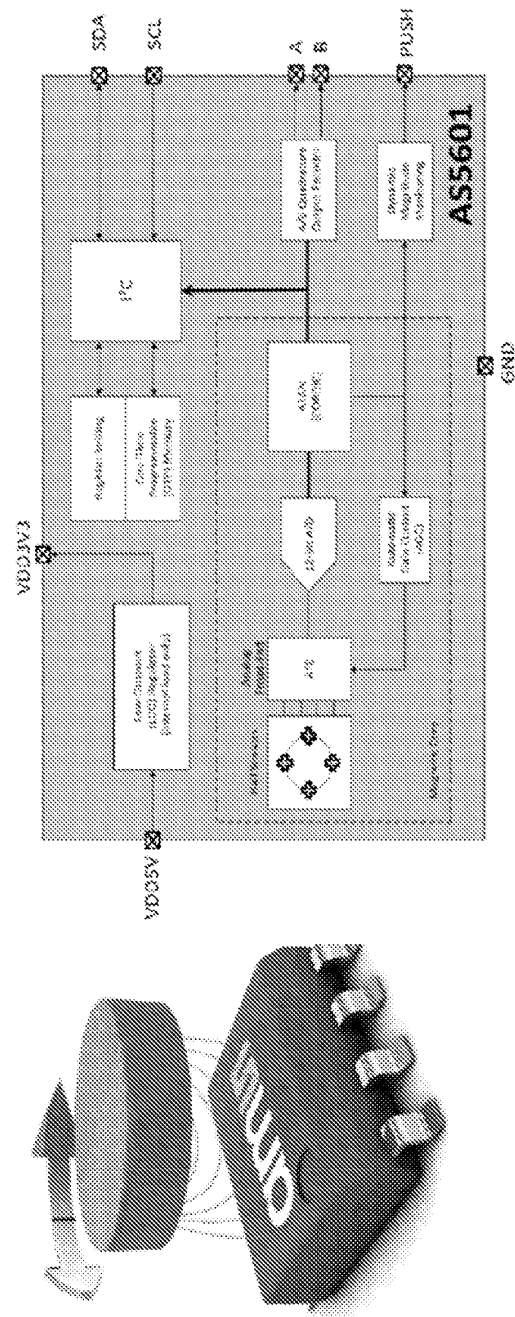


FIG. 18

H20933

Diameter:	0.5295"
Thickness:	0.0787"
Hole Dia:	0.372"
Grade:	N40
Plating:	Ni-Cu-Ni
Power:	0.748 lbs





0.448"
(11.40mm)
OD x 0.394"
(10mm) ID x
0.079"
(2mm)
thick, N40
Neodymium
Magnets...

R1013D
\$1.15
● In stock, 238 units

<https://www.amazingmagnets.com/sf-ring-tube-magnets.aspx>
<https://supernagnetman.com/collections/neo-rings>

Neodymium Ring / Tube Magnets

FIG. 19

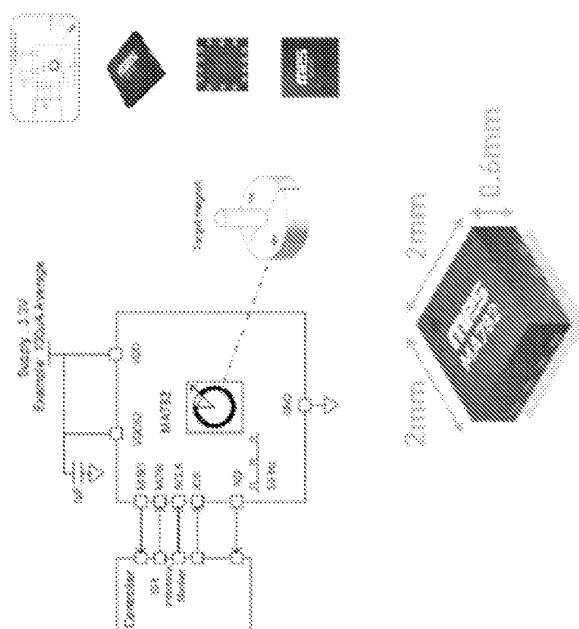


FIG. 20

MICROFORCE SENSORS, FMA SERIES

FIGURE 3. SENSOR MOUNTING DIMENSIONS (FOR REFERENCE ONLY: MM/(IN.))

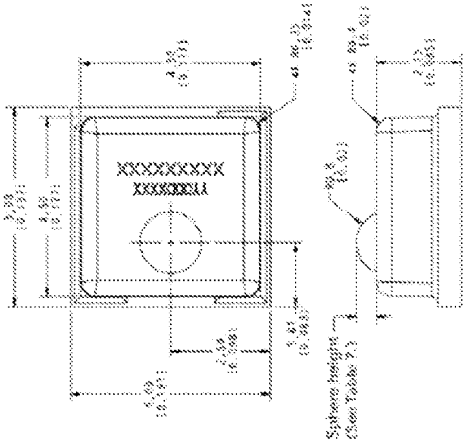


TABLE 6. PINOUT		
PIN	FUNCTION	SPI
1	V5	V5
2	NC	SS
3	GND	GND
4	SCL	SCL/R
5	SDA	MISO
6	NC	NC

TABLE 7. SPHERE FORCE VS HEIGHT	
FORCE (N)	SPHERE HEIGHT (MM)
5	0.293±0.075
15	0.393±0.075
25	0.463±0.075





FIG. 21

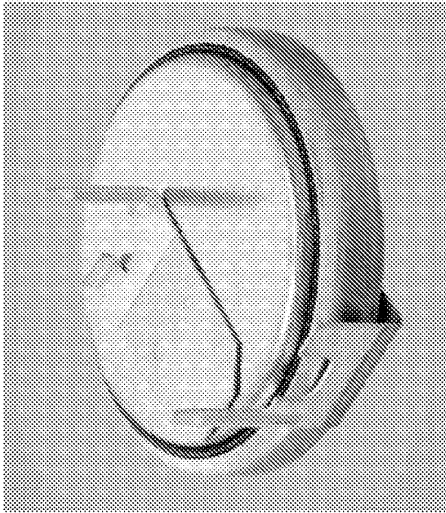

Lithium Coin Tabbed / Through Hole
Mounting (horizontal)

CR1632FH-LF

FIG. 22

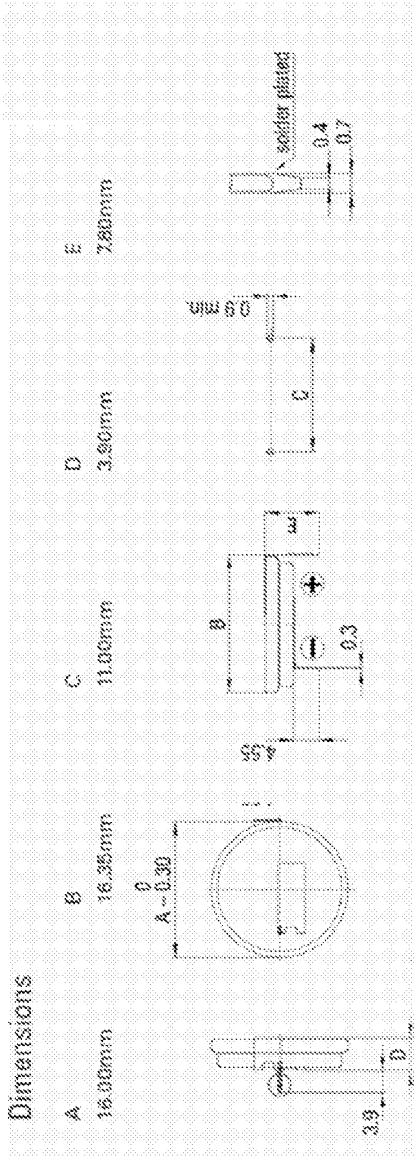


FIG. 23

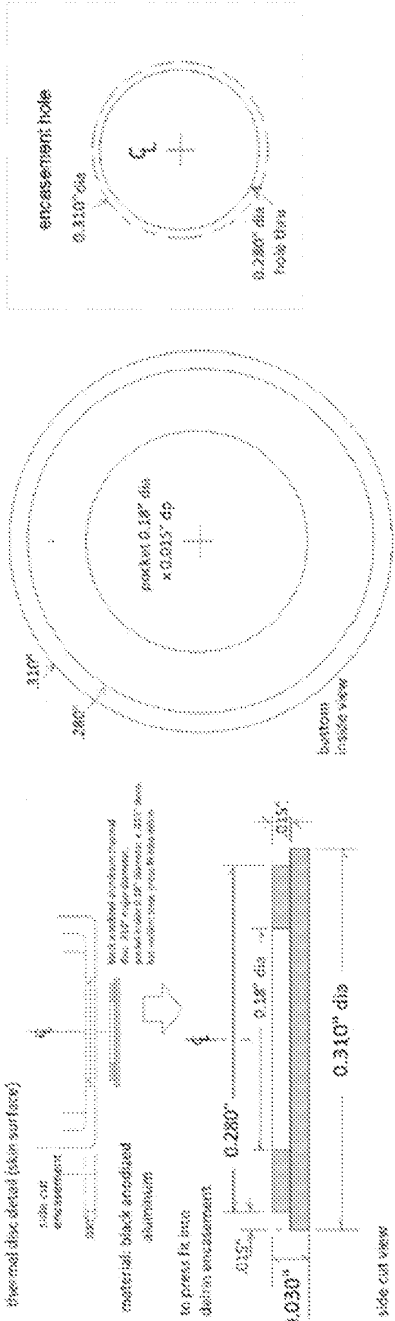


FIG. 24

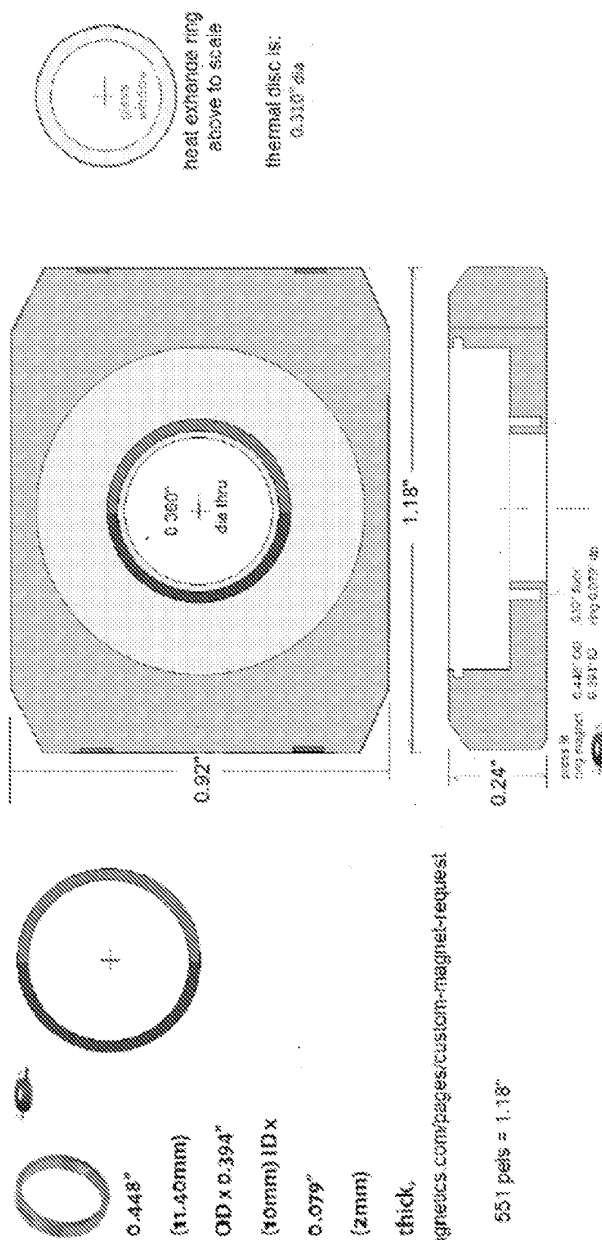


FIG. 25

ಪ್ರವಾಸಿಗಳಿಗೆ ಪ್ರಯೋಜನವಾಗುವಂತಹ ಸ್ಥಳೀಯ ಸಂಸ್ಥೆಗಳೊಂದಿಗೆ ಸಹಕರಿಸುವುದು.

2000