

PERMANENT MAGNET FIELD SMALL DC MOTOR

TECHNICAL FIELD

5 The present invention relates to a permanent magnet field small DC motor having a thin arc-shaped rare-earth magnet of maximum thickness 1 mm or less, which motor operating on a low starting voltage and a low starting current yet yielding a high output with an accurate revolving performance at lower cogging torque. Typical field of application of which motors is in the optical pickup for MD, CD-ROM and the like audio-visual equipment.

10 BACKGROUND ART

FIG. 1(a) is a cross sectional view at the key portion of a permanent magnet field small DC motor relating to the present invention; FIG. 1(b) shows an arc-shaped magnet using in the motor. In the drawings, a pair of arc-shaped magnets 1; a soft-magnetic frame 2; an armature 3 which includes brush rectifier, rotating shaft and bearing; and a U-shaped spring 4 for pressing and securing the pair of arc-shaped magnets 1 in the soft-magnetic frame 2 are shown. The permanent magnet field small DC motor under discussion is requested to be miniaturised further, yet to provide a higher output and an accurate revolving performance; like in other permanent magnet motors.

As a general rule among the permanent magnet field small DC motor, it is difficult to maintain the output with a diameter of armature 3 reduced. Especially, in a motor using ferrite magnet, whose maximum energy product $[BH]_{max}$ is low irrespective of whether it is fabricated by sintering, or by compression moulding, injection moulding or extrusion moulding of a material mixed with a resin binder, the air-gap between an arc-shaped magnet 1 and an armature 3 is not provided with sufficiently strong static magnetic field when miniaturised. Hence, the output is significantly reduced. In a wish to provide the air-gap between a arc-shaped magnet 1 and an armature 3 with strong static magnetic fields among the miniaturised motors, a rare-earth magnet in an arc-shape whose maximum thickness is 1 mm or less, which exhibiting a so-called high $[BH]_{max}$ value, has been required.

Regarding the arc-shaped rare-earth magnet whose maximum thickness is 1 mm or less, the Japanese Patent Laid-open Publication No. H6-236807 discloses a method for fabricating an arc-shaped rare-earth magnet. The method comprising the steps of; pouring a melted mixture of thermo-plastic resin-binder and various kinds of rare-earth iron based magnetic powders, ranging from anisotropic to isotropic, into a mould, and extrusion moulding while cooling it below melting point of the thermo-plastic resin-binder. According

to the disclosure, an arc-shaped rare-earth magnet of 0.9 mm thick can be produced at a thickness variation $\pm 30 \mu\text{m}$ through extrusion moulding from a bonded-magnet compound of, for example, isotropic rare-earth iron based melt-spun flakes 95 weight% and a thermoplastic resin consisting mainly of 12-nylon. However, it is also mentioned that there is a difficulty in conducting a compression moulding of rare-earth-based melt-spun flakes together with a resin-binder. In the extrusion moulding, the thermo-plastic resin in the melt state has to perform a role of a carrier for the rare-earth iron based melt-spun flakes. So, as compared to a compression moulded rare earth magnet, which is prepared from rare-earth iron based melt-spun flakes mixed with a thermosetting resin of normally 3 weight% or less, the content of rare-earth iron based melt-spun flakes needs to be lowered in the magnet of the above disclosure. Accordingly, the [BH] max value of the magnet becomes lower, and the static magnetic fields between arc-shaped magnet 1 and armature 3 becomes weaker.

One of the problems with the permanent magnet field small DC motor comprising the arc-shaped rare earth magnet fabricated through the above extrusion moulding, which provides a stronger static magnet field in an air-gap to the armature 3 as compared to a ferrite magnet motor, is an increased cogging torque. This is the torque pulsation due to permeance changes as a result of revolution of the armature 3 caused by iron core teeth 31 and a slot 32 existing on the outer circumferential surface of the armature 3 disposed opposing to the arc-shaped magnet 1. The cogging torque is a substantial problems among the permanent magnet field small DC motors which are expected to be compact in size, yet required a high mechanical output with an accurate revolving performance. The motors are the object of the present invention.

Among the motors having an arc-shaped magnet, regardless whether it is rare earth magnet or not, known technologies for reducing the cogging torque through a shape of arc-shaped magnet include making radius of the outer surface of the arc-shaped magnet to be different from that of the inner surface, or cutting edges at both ends in the circumferential direction of an arc-shaped magnet ; thereby making distribution of flux density in the air-gap closer to a sine curve (an example of the publication: Shogo Tanaka, "Application of Permanent Magnets for Small Motors", page 7 in the proceedings of the Symposium of Small Motor Technology, 1983). The Japanese Utility Model Publication No. S49 -4651 discloses that, in a permanent magnet field small DC motor, a cut provided in an arc-shaped magnet in the outer surface at both sides off the centre of magnetic pole suppresses reduction of effective flux at the centre of magnetic pole, despite the reduction at the cut portion. Although there is no mention about the cogging torque in the Utility Model, there is an indication about a possibility that the cut

provided in an arc-shaped magnet in the outer surface at both sides off the centre of magnetic pole would reduce the cogging torque in a permanent magnet field small DC motor, while controlling deterioration of the rotating torque.

5 A practical means for reducing the cogging torque in a permanent magnet field small DC motor, including the use of a thin arc-shaped rare earth magnet, is disclosed in the Japanese Patent Laid-open Publication No.H11-18390. The disclosed means has a relevance with a method shown in FIG. 2 (a), (b). In the drawings, a pair of arcuate permanent magnets 1, a soft-magnetic frame 2, an armature 3 including the brush-rectifier, rotating shaft and bearing, a hooking protrusion 21 for fitting and securing the pair of arc-shaped permanent
10 magnets 1 to the soft-magnetic frame 2 are shown.

According to the disclosure; (1) the radius curvature of arc-shaped magnet 1 at the outer surface is deviated from that of the inner surface so that the air-gap between the magnet and armature core increases along with the increasing distance along the direction of circumference from the centre of magnetic pole towards both ends, viz. a structure of so-
15 called uneven air-gap, (2) the arc-shaped magnet having deviated radius curvature in the outer surface and inner surface is provided with a cut portion 11 so that there is an air- gap between the arc-shaped magnet and the soft-magnetic frame 2, and (3) the arc-shaped magnet 1 is slightly bent and fitted to be secured in the soft-magnetic frame 2 between the hooking protrusions 21. (An arc-shaped rare earth magnet with 12-nylon fabricated by extrusion
20 moulding, ref. the Japanese Patent Laid-open Publication No. H6-236807, can be slightly bent.)

The direction of thrust in the arc-shaped rare earth magnet 1 coincides with that of extrusion in the extrusion moulding, so the cross sectional shapes in the direction remain identical as shown in FIG. 2 (b). Therefore, when an arc-shaped rare-earth magnet 1 is
25 secured in a soft-magnetic frame 2 with the thinned both ends in the circumferential direction of magnet 1, at which a vacant space is formed to the soft-magnetic frame 2, engaged by the hooking protrusions 21, the bent quantity at magnet 1 might increase depending on the variation in thickness value $\pm 30 \mu\text{m}$ in the magnet 1. This can lead to crack, tip-cut, etc. of the magnet 1 at the engagement portion, or even the magnet 1 might drop off the frame.
30 Thus, there is a possibility of serious hazards in the reliability of permanent magnet field small DC motors in the above disclosure.

Next, a practical means for fixing a thin arc-shaped rare earth magnet to a soft-magnetic frame of permanent magnet field small DC motors is disclosed in the Japanese Patent Laid-open Publication No. H11-18390, which is shown in FIG. 3 (a), (b).

In the drawings, a pair of arc-shaped permanent magnets 1, a portion 11 of magnet for reducing cogging torque, an engagement portion 12 of the magnet, a soft-magnetic frame 2, an armature 3 including the brush-rectifier, shaft and bearing, and a hooking protrusion 21 for fixing and securing the pair of arcuate permanent magnets 1 in the soft-magnetic frame 2 are shown.

According to the disclosure, an arc-shaped rare earth magnet 1 has two or more different shapes in the cross section along the thrust direction; namely, a shape of the engagement portion 12 which is to be fitted-in between the hooking protrusions 21 of soft-magnetic frame 2 and a shape of the portion 11 for reducing cogging torque. The means for reducing cogging torque disclosed in the above Laid-open patent remains identical to that taught in the Japanese Patent Laid-open Publication No. H10-201206; which is generally known means like deviating curvatures or cutting corners of a magnet. The problems of crack, tip-cut, etc. of an arc-shaped rare earth magnet 1 at the engagement portion that might arise when it is fixed and secured in a soft-magnetic frame 2, or drop-off of a magnet 1, which are relevant to the Japanese Patent Laid-open Publication No. H10-201206, can be significantly improved.

However, there is a difficulty in fabricating by, for example, extrusion moulding an arc-shaped rare earth magnet of maximum thickness 1 mm or less that has two or more shapes in the cross section along the thrust direction. Providing the portion 11 for reducing cogging torque will need a post machining process of cutting off both ends in the circumferential direction. Cutting a thin arc-shaped rare earth magnet 1 at a high precision level is quite a difficult work; cracks, drop-offs readily arise to invite a poor manufacturing yield rate. Furthermore, particles of the raw material of rare earth magnet may increase the difficulty in finishing an arc-shaped rare earth magnet 1 to be ready for mounting in a soft-magnetic frame 2.

A rare earth magnet fabricated by compression moulding from isotropic rare earth iron based melt-spun flakes mixed with a binder (e.g. an epoxy resin) for 1.5 - 3.0 weight%, in general, and heated for curing the binder exhibits a density of 5.8 - 6.1 g/cm³. Whereas, the magnet fabricated by extrusion moulding from the same rare earth iron based melt-spun flakes, which needs a binder (e.g. 12-nylon) for more than 5 weight%, exhibits a density of 5.7 g/cm³ or less. Since the maximum energy product [BH] max of the magnet is dependent on the quantity of the filled rare earth iron based melt-spun flakes, or the magnet density, a compression moulded rare earth magnet that can offer a higher [BH] max is more advantageous for providing a strong static magnet field in the air-gap between an armature

and a magnet in the permanent magnet field small DC motors, as compared with the one fabricated by extrusion moulding.

A first problem to be solved by the present invention is the problem described in the Japanese Patent Laid-open Publication No. H6-236807; meaning that "since there is a substantially wide variation in the weighing at moulding, it has been considered to be difficult to provide by compression moulding thin arc-shaped magnets having a maximum thickness of 1 mm or less at a dimensional accuracy $\pm 30 \mu\text{m}$ ". Even if the problem is solved, however, the mechanical strength of compression moulded rare earth magnet is low at room temperature area, and brittle, because of less amount of resin contained therein. So, the arc-shaped rare earth magnets fabricated by compression moulding are not suitable for fixing and securing in a soft-magnetic frame in accordance with the method taught in the Japanese Patent Laid-open Publication No. H10-201206 and the Japanese Patent Laid-open Publication No. H11-18390, meaning that attaching a magnet "at the engagement portion between the hooking protrusions of soft-magnetic frame with the magnet slightly bent". Namely, a second problem to be solved by the present invention is to contrive new means for securing an arc-shaped rare earth magnet in a soft-magnetic frame by taking appropriately the physical properties of the magnet into consideration. In addition, since "the [BH] max is higher than that of an arc-shaped rare earth magnet fabricated by extrusion moulding", a third task to be attained in the present invention is to offer new additional means for controlling the distribution of flux density in the air-gap by a known means of providing the magnet with a appropriate shape for reducing the cogging torque.

DISCLOSURE OF THE INVENTION

A permanent magnet field small DC motor of the present invention has a stronger static magnet field in the air-gap between an armature and the magnet, by employing an arc-shaped rare earth magnet of 1 mm thick or less fabricated by compression moulding. New control means for controlling distribution of flux density in the air-gap between an armature and the magnet as proposed by the present invention enhances the high precision revolving performance by further reducing cogging torque, in the compact and high output.

According to an aspect of the invention, there is provided a permanent magnet field small DC motor comprising an arc-shaped permanent magnet fixed in a soft-magnetic frame, wherein said magnet is provided with an outer surface at both ends in the thrust direction that fits along the inner surface of said soft-magnetic frame, and a certain region in the middle part

5a

in the thrust direction of said magnet at both ends in the circumferential direction where said
5 soft-magnetic frame does not function as a back yoke.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 (a) shows a cross sectional view in key portion of a motor in an exemplary
embodiment of the present invention, FIG. 1 (b) is a perspective view of a magnet used in the
10 motor

FIG. 2 (a) shows a cross sectional view in key portion of a conventional motor, FIG. 2 (b) is a perspective view of a magnet used in the motor.

FIG. 3 (a) shows a cross sectional view in key portion of a conventional motor, FIG. 3 (b) is a perspective view of a magnet used in the motor.

5 FIG. 4 is a characteristics chart showing demagnetization curves.

FIG. 5 is a characteristics chart showing the temperature dependence of breaking stress.

FIG. 6 is a characteristics chart showing the changes of cogging torque and back electromotive force (back emf) relative to the angle.

10 FIG. 7 is a characteristics chart showing the changes of cogging torque and back emf relative to the demagnetization by heat.

BEST MODE FOR CARRYING OUT THE INVENTION

Referring to FIG. 1, an arc-shaped rare earth magnet 1 having a maximum thickness
15 t of 1 mm or less is fabricated by compression moulding from rare earth - iron based melt-spun flakes mixed with a binder, the outer surface 12 at both ends in the thrust direction of the magnet is shaped in accordance with the inner surface of soft-magnetic frame 2, while a certain clearance is provided between the outer surface of the magnet 1 in the middle part in the thrust direction at both ends 11 in the circumferential direction and the soft-magnetic
20 frame 2. The magnets are fixed and secured opposing to each other with an armature 3 disposed in between, to complete a finished permanent magnet field small DC motor.

Objective of forming the clearance is to provide the arc-shaped rare earth magnet 1 with a certain specific portion having no back yoke, in the middle part in the thrust direction at both
25 ends 11 in the circumferential direction. Thereby, providing the specific portion of the magnet with a demagnetization curve that is smaller than that at the centre of magnetic pole in the circumferential direction. The clearance may be formed by modifying part of a shape in the soft-magnetic frame 2. However, preferably it is provide by: (1) Forming a plane surface at an angle θ 53 - 82° to the outer surface 12 in the middle part in the thrust direction of arc-shaped rare earth magnet 1 at both ends in the circumferential direction. A clearance can be
30 provided between the both end-surfaces 11 and the soft-magnetic frame 2, totally through a compression moulding without requiring any post machining process.

Or, (2) Making curvature of the outer surface in the middle part in the thrust direction at both ends in the circumferential direction of arc-shaped rare earth magnet 1 to be different from that of the outer surface at both ends in the thrust direction. A clearance can be

provided between the both end-surfaces 11 and the soft-magnetic frame 2, totally through a compression moulding, without needing any post machining process. The arc-shaped rare earth magnet 1 may be attached to the soft-magnetic frame 2 by inserting it with the pair of outer surfaces 12 proceeding along the inner surface of soft-magnetic frame 2, and fixing and
5 securing it at both ends in the revolving direction using, for example, a spring 4 of U-shape. In this way, a compression-moulded arc-shaped rare earth magnet 1, which is brittle and vulnerable to the shearing force yet can withstand relatively strong pressure, can be mounted in a soft-magnetic frame 2 easily and safely without cracks or dropping-off.

The above arc-shaped rare earth magnet 1 has been fabricated from a granular
10 compound, particle diameter 250 μm or less, of rare earth iron based melt-spun flakes mixed with an epoxy-resin binder for 1.5 - 3 weight%. The granular compound is compression moulded into an arc-shaped moulding cavity of compressed granular compound, and then it is cured of epoxy-resin binder. The rare earth iron based melt-spun flakes of a $\text{RE}_2\text{TM}_{14}\text{B}$ (RE is Nd, Pr : TM are Fe, Co) phase, the grain size of 300 nm or less, exhibit an intrinsic
15 coercivity H_{ci} 8 - 10 kOe, remanence 7.4 - 8.6 kG. Or, it may contain isotropic rare-earth iron based melt-spun flakes of nano-composite structure having both the soft magnetic phase and the hard magnetic phase.

The rare earth iron based melt-spun flakes as referred to in the present invention is the one as described, for example, by J. F. Herbst, in "Rare Earth-Iron-Boron Materials; A
20 New Era in Permanent Magnets", Ann. Rev. Sci. Vol - 16. (1986). That is; molten alloy containing Nd : Fe : B in an approximate proportion 2 : 14 : 1 is rapidly-solidified, and precipitate the isotropic $\text{Nd}_2\text{Fe}_{14}\text{B}$ phase by heat treatment. Any $\text{Nd}_2\text{Fe}_{14}\text{B}$ phase would be available as far as the grain size of single magnet domains is approximately 300 nm or less. Or, a sort of nano-composite of soft magnet phase of, for example, αFe , Fe_3B and hard
25 magnet phase such as $\text{Nd}_2\text{Fe}_{14}\text{B}$, $\text{Sm}_2\text{Fe}_{17}\text{N}_3$ combined by a strong exchange interaction as a result of heat treatment applied on rare earth iron based melt-spun flakes can serve the purpose. The reason why the rare earth iron based melt-spun flakes are specifically nominated is that as a function of magnetization field it exhibits both a remanence B_r and a coercivity H_{cB} both increasing simultaneously, and hence exhibits a well-balanced
30 demagnetization (B-H) curve even in an unsaturated magnetized state. For example, permeance coefficient at the magnetic pole is different from that at the both ends in the circumferential direction having no back yoke, and with respect to the magnetization of arc-shaped rare earth magnet 1, the demagnetization (B-H) curves (remanence B_r and coercivity H_{cB}) at the magnetic pole becomes different from that at the ends 11 in the circumferential

direction. This may be described in the following way; when a magnet is fabricated from rare earth iron based flakes, it exhibits different magnetic properties in the magnetic pole and the both ends in the circumferential direction as if the magnet is a unitized permanent magnet formed of different magnets, despite a fact that it is formed of a same material.

5 The arc-shaped rare earth magnet 1 fixed along the inner surface of soft-magnetic frame 2 is magnetized, and then it undergoes the initial demagnetization by heating. The portion of magnetic pole which has a back yoke and shows a large demagnetization curve (large remanence value for B_r and coercivity for H_{cb}), exhibits small demagnetization, while the outer portion in the middle part in the thrust direction of the magnet at both ends 11 in the
10 circumferential direction, which has no back yoke, exhibits large demagnetization at both ends. The distribution of flux density in the air-gap is improved much closer to a sine curve, and a rate of cogging torque reduction is greater than that of toque reduction. Thus the distribution of flux density in the air-gap to the iron core of armature 3 is put under control.


 As described in the foregoing, the permanent magnet field small DC motors of the
15 present invention comprise, not a conventional arc-shaped rare earth magnet of maximum thickness 1 mm or less fabricated by extrusion moulding, but an arc-shaped rare earth magnet fabricated from rare earth iron based melt-spun flakes mixed with a binder by compression moulding which has higher $[BH]_{max}$ than that of the conventional magnet. The arc-shaped rare earth magnet fabricated by compression moulding containing more rare earth iron based
20 flakes exhibits increase of both a remanence B_r and a coercivity H_c simultaneously as a function of magnetizing field, and hence exhibits a well-balanced magnetization curve even in an unsaturated magnetized state. Under the same magnetization conditions, a stronger static magnet field is provided in the air-gap between the magnet and the armature, so that a stronger output is obtained. Especially, with respect to the issue of cogging torque, which
25 becomes significant along with the increasing output, the present invention proposes new improvement means of controlling the distribution of flux density in the air-gap, which includes, (1) making demagnetization curve in the middle part in the thrust direction of arc-shaped rare earth magnet at both ends in the circumferential direction small, making use of the reverse magnet field during magnetizing, (2) making use of the difference in
30 demagnetization by heat, in addition to the conventionally known means for reducing the cogging torque by providing a magnet with a unique shape.

 Now in the following, the present invention is described further in details. The embodiments are only examples and not to be understood limitedly.


[Binder Composition]

An epoxy resin synthesised from bisphenol type epoxyoligomer (C1), weight average molecular weight M_w 1400, and blocked-isocyanate (C2) which is synthesised from 4-4'-diphenylmethan diisocyanate (1 mol) and methylethylketon-oxime (2 mol) , are dissolved in acetone and the 50 wt.% acetone solution is used as binder. Ratio of the isocyanate -NCO group versus sum of alcoholic hydroxide group and epoxy group in the molecular chain of epoxyoligomer is 0.8.

(C 1)

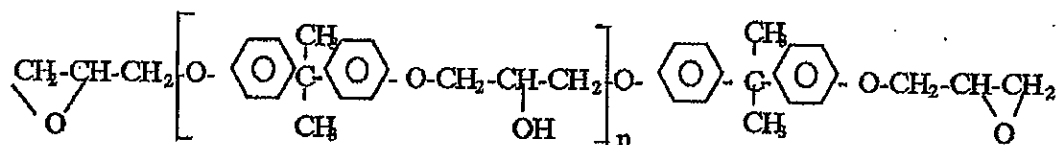

10 (C2)

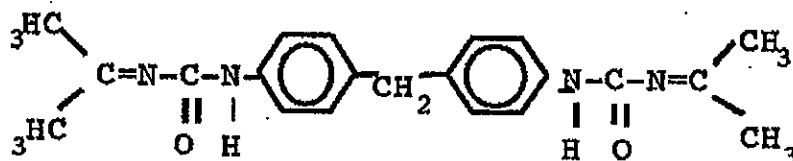

[Granular Compound]

Magnetic flakes used in this invention is a product from Magnequench International In, Co. (Trade Mark: MQP-B), which is a rare earth-iron based melt-spun flake with a thickness of 20 - 30 μm and having alloy composition of $\text{Nd}_{12}\text{Fe}_{77}\text{Co}_5\text{B}_6$, and isotropic $\text{Nd}_2\text{Fe}_{14}\text{B}$ phase with grain size having a diameter of 20 - 50 nm.

Epoxy resin resolved in acetone (2.5 weight% in solid composition) and rare earth-iron based melt-spun flake 97.5 weight% were wet-mixed using a sigma blade kneader. And then it is heated to 80 - 90°C to evaporate the acetone, and formed into a solid block at room temperature. The solid block was crushed using a cutter mill under the room temperature, the crushed granule was classified in accordance with the particle diameter into granular compounds of 500, 350, 250, 212 and 150 μm . Finally, mixed homogeneously with a V-

blender at a temperature of 40°C or lower, after adding calcium stearate powder for 0.2 - 0.6 weight portion.

[Particle Diameter of Granular Compound and Dimensional Accuracy of Thin Arc-shaped Green Compacts]

5 Granular compound was classified by particle diameter into classes smaller than 500, 350, 250, 212 and 150 μm , respectively. Granular compound of each class was supplied a powder compacting press (compression moulding machine), measured in volume and compressed at 8 ton/cm² to form an arc-shaped green compact having thickness of 1 mm or less. The compression moulded arcuate item was cured at 160°C for 2 min. Thus, samples
10 of so-called compression moulded arc-shaped rare earth magnet were provided for 30 pcs. each class. Dimensions of the magnet are: Outer radius 3.65 mm, Inner radius 3.55 mm, Maximum thickness 0.90 mm and Length in the thrust direction 15.5 mm.

Deviation of the maximum thickness 0.9 mm among the finished arc-shaped rare earth magnets (n=30) in relation to the upper limit of particle diameter of granular compound
15 used is represented in the following formula (regression coefficient 0.988).

$$A = 0.0003P^2 - 0.0718P + 24.745 \dots\dots (1)$$

where; A : represents range of thickness deviation($\pm \mu\text{m}$),

P : the largest particle diameter μm of the granular compound.

20 As shown from the regression formula, when granular compound having the particle diameter 250 μm or less is used the thickness deviation in the thin arc-shaped magnet of less than 1 mm thick can be suppressed to be less than $\pm 30 \mu\text{m}$, actually less than $\pm 26 \mu\text{m}$. Meanwhile, comparative samples for the same dimensions were also provided using pellets of 95 weight% the same rare earth iron based melt-spun flakes mixed with 5 weight% of 12-
25 nylon at 260°C. The comparative samples were fabricated by the extrusion moulding disclosed in the Japanese Patent Laid-open Publication No. H6-236807, with the temperature at tip end of moulder dice set at 175°C, which is a temperature lower than melting point of 12-nylon. Thickness deviation among the comparative samples was $\pm 30 \mu\text{m}$, at the portion of maximum thickness 0.9 mm.

30 It may be understood that the thin arc-shaped rare earth magnets having the same, or higher, dimensional accuracy as those fabricated by extrusion moulding, can be fabricated from granular compound by compression moulding using a powder compacting press in accordance with the present invention. Which, according to the Patent Publication No. H6-

236807, was described to be difficult.

[Magnetic Characteristics]

Granular compound having particle diameter of 250 μm or less was compressed at 8 ton/cm² to form a round column of 5 mm high with diameter 5 mm. The column was cured at 160°C for 2 min. to provide a column shape rare earth magnet. The magnet was pulse-magnetized at 50 kOe in the direction of height. Demagnetization curve was measured using a vibrating sample magnetometer (VSM) at measuring magnetic field ± 20 kOe.

Also, demagnetization curve was measured with rare earth magnet fabricated by extrusion moulding from pellets of rare earth iron based flakes 95 weight% mixed with 12-nylon 5 weight% at 260°C, molten and solidified. FIG. 4 compares the rare earth magnet fabricated by compression moulding in accordance with the present invention and the comparative rare earth magnet fabricated by extrusion moulding, with respect to demagnetization curve. Table 1 shows the magnetic characteristics derived from the demagnetization curve.

As indicated in FIG. 4 and Table 1, magnet in the present invention exhibits a higher [BH] max. as compared with that of comparative sample. Supposed reasons for the higher [BH] max. include; a higher packing density of rare earth iron based flakes in the magnet of the present invention; whereas, magnetic properties deteriorated in the comparative sample because the flakes were kneaded with a strong shearing force under a high temperature 260°C, which brought about oxidation of crushed flakes.

Table 1

	Coercivity H _{ci} kOe	Remanence 4 π I _r kG	Maximum energy product [BH]max MGOe	Squareness H _k
Present invention	9.53	6.87	9.55	2.59
Comparative Example	8.66	6.58	8.30	2.24

[Withstanding Stress and Fixing of Magnet to Soft-magnetic Frame]

Granular compound of particle diameter 250 μm or less was delivered to a powder

compacting press, measured in volume, compressed at 8 ton/cm² to form an arc-shaped green compact of less than 1 mm thick. It was cured at 160°C for 2 min. to provide a so-called compressive-formed arc-shaped rare earth magnet. Dimensions of the magnet are: Outer radius 3.65 mm, Inner radius 3.55 mm, Maximum thickness 0.90 mm and Distance in the thrust direction 15.5 mm. Also, comparative sample of rare earth magnet having the same shape was fabricated by extrusion moulding from pellets of rare earth iron based melt-spun flakes 95 weight% and 5 weight% of 12-nylon kneaded at 260°C, molten and solidified.

FIG. 5 is a characteristics chart showing the temperature dependence of the withstanding stress of above arc-shaped rare earth magnets. The withstanding stress refers to a load kgf given to the magnet at the portion of maximum thickness when it is broken, as shown in the drawing.

As it is clear from FIG. 5, mechanical strength at room temperature of the compression-moulded arc-shaped rare earth magnet in the present invention is as low as approximately 60 % of the extrusion-moulded counterpart of the same dimensions, and brittle having least bending property. Therefore, the magnet is not suitable for mounting in a soft-magnetic frame in accordance with a method described in the Japanese Patent Laid-open Publication No. H10-201206 or the Japanese Patent Laid-open Publication No. H11-18390; meaning, "fitting to be engaged between the hooking protrusions by slightly bending the arc-shaped rare earth magnet". If the magnet in the present invention is slightly bent and inserted in a soft-magnetic frame, the magnet is liable to case breakage, or even falling-off, at the engaged portion. Therefore, the magnets of the present invention are not suitable for mounting in the frame at an agreeable yield rate in the industrial scale.

It is possible to glue a magnet of the present invention to a soft-magnetic frame. However, as described in the Japanese Patent Laid-open Publication No. H10-201216 and the Japanese Patent Laid-open Publication No. H11-18390, it is not an appropriate method to glue a magnet to a soft-magnetic frame for this type of permanent magnet field small DC motors.

Magnets of the present invention can withstand a pressing stress in excess of 6 kgf at room temperature, as shown in FIG. 5. Comparing to the comparative sample, the withstanding value is maintained until a temperature as high as approximately 120°C. So, it is preferred to fix a pair of magnets 1 disposed along the inner surface of soft-magnetic frame 2 with a U-shaped spring 4 which presses the magnet 1 at both ends in the circumferential direction, as shown in FIG. 1. Strength of fixing the magnet 1 to soft-magnetic frame 2 generally depends on pressing force of a spring used. A pressing force of 0.5 kgf or less is enough for generally considerable operating temperature range. So, safety index relative to

the allowable compression strength is more than ten times higher over the whole operating temperature range up to 120°C, which is the highest possible temperature with the permanent magnet field small DC motors, taking into consideration the allowable pressing stress and its temperature dependency. Thus the magnet is mounted and secured with a sufficiently high reliability.

[Effect of the Portion of Magnet which Does Not Employ the Soft-magnetic Frame as Back Yoke]

FIG. 6 shows a relationship among the angle θ , ref. FIG. 1, the rate of the cogging torque and the Back electromotive force (Back emf) with an arc-shaped rare earth magnet. The magnet is provided with a plane surface with an angle θ to the curving outer surface of the compression mould, in the middle part (distance 12.5 mm) in the thrust direction of the magnet at both ends in the circumferential direction, for forming a clearance having no back yoke with respect to soft-magnetic frame. Dimensions of the magnet are: Outer radius 3.65 mm, Inner radius 3.55 mm, Maximum thickness 0.90 mm and Distance in the thrust direction 15.5 mm. Values at angle θ of the plane surface are specified based on the values at an assumed angle 90° derived from the Japanese Patent Laid-open Publication No. H10-201206. In the permanent magnet field small DC motor used for measurement, Back emf V is 0.218 mV/rpm, cogging torque C_t was 1.15 g-cm, at $\theta = 90^\circ$.

As seen in the drawing the Back emf V decreases linearly relative to the angle θ as derived from the regression formula, but the decrease is as small as 5 % in a range of θ from 90° to 53°. The cogging torque C_t , however, shows a significant change in a second-order function relative to the angle θ and the change reaches the highest at approximately $\theta = 65^\circ$. The cogging torque is reduced by almost 70 % at that highest point. Even in a range between 82° to 53°, it is reduced by more than 40 % from the value at 90°.

The above-described advantage has been brought about by the thin arcuate rare earth magnet having at both ends in the circumferential direction a region having no back yoke and being fabricated from rare earth iron based melt-spun flakes, which exhibits both a remanence B_r as a function of magnetizing field and a coercivity H_{cB} both increasing simultaneously and hence exhibits a well-balanced magnetization curve even in an unsaturated magnetized state. Thus the permanent magnet field exhibits a magnetic performance as if different magnets having different respective properties unified into one magnet.

The arc-shaped rare earth magnet as disclosed in the Japanese Patent Laid-open Publication No. H11-18390, having an engagement portion to be engaged with hooking

protrusion of soft-magnetic frame and a portion for reducing cogging torque, namely, a rare earth magnet which has two or more shapes in the cross section along the so-called thrust direction, can not be fabricated by extrusion moulding as taught in the Japanese Patent Laid-open Publication No. H6-236807. However, by the compression moulding of the present invention arc-shaped rare earth magnet with the portion having no back yoke of soft-magnetic frame can be provided through either (1) providing a plane surface at an angle θ $53^\circ - 82^\circ$ to the curving outer surface of the compression mould, in the middle part in the thrust direction of the arc-shaped rare earth magnet at both ends in the circumferential direction, or (2) making curvature of the outer surface in the middle part in the thrust direction of the magnet to be different from that of the outer surface at both ends in the thrust direction. In either of the cases, an arc-shaped rare earth magnet can be formed to a finished magnet totally by a powder compacting press (compression moulding process), without using any post machining process.

[Effect of Heat Demagnetization of Magnet in No Back Yoke Portion]

Unsaturated magnetization was applied on an arc-shaped rare earth magnet provided with a plane surface at an angle θ 62° to the curving outer surface of the compression mould, in the middle part in the thrust direction (distance 12.5 mm) at both ends in the circumferential direction for forming a certain clearance having no back yoke with respect to a soft-magnetic frame, in 4 stages with a capacitance 2000 μF , at 1500 - 2400 V. FIG. 7 is a characteristics chart showing a change in the cogging torque and the Back emf, before and after a demagnetization conducted by exposing to a temperature 140°C for 5 min. Dimensions of the magnet are: Outer radius 3.65 mm, Inner radius 3.55 mm, Maximum thickness 0.90 mm and Distance in the thrust direction 15.5 mm. The values are those which have been normalized to the cogging torque and the Back emf of the magnet magnetized with the maximum magnetization field, at 2000 μF , 2400 V; before the demagnetization by heat. In the permanent magnet field small DC motor measured here, the reference Back emf V is 0.214 mV/rpm, cogging torque Ct is 0.46 g-cm.

As shown in the chart, when a permanent magnet field small DC motor of the present invention is demagnetized by heat, reduction of Back emf V generally remains at 0.5 % or less. However, the cogging torque is further reduced for approximately 10 %. When an arc-shaped rare earth magnet mounted and fixed along the inner surface of a soft-magnetic frame is magnetized and then given with an initial demagnetization by heat, the portion of centre of magnetic pole having a back yoke exhibits a small demagnetization, while the outer surface in the middle part in the thrust direction of the magnet at both ends in the

circumferential direction, which ends having no back yoke, exhibit a large demagnetization, even when the magnet has a large demagnetization (B-H) curve (large remanence B_r and coercivity H_cB). As the result, distribution of flux density in the air-gap is improved further to be closer to a sine curve and the larger cogging torque reduction is obtained relative to the reduction of Back emf caused by the demagnetization.

INDUSTRIAL APPLICABILITY

A permanent magnet field small DC motor of the present invention comprises an arc-shaped rare earth magnet of maximum thickness 1 mm, fabricated by compression forming from rare earth iron based melt-spun flakes mixed with a binder, the magnet being provided with a certain portion having no back yoke at both ends in the circumferential direction for forming a clearance with respect to a soft-magnetic frame when it is fixed therein with a pressing force. The arc-shaped rare earth magnet containing more rare earth iron based melt-spun flakes exhibits both a remanence B_r as a function of magnetizing field and a coercivity H_cB both increasing simultaneously and hence exhibits a well-balanced magnetization curve even in an unsaturated magnetized state. Under the same magnetization conditions, the magnet provides a stronger static magnetic field in the air-gap between the magnet and the armature, hence a higher output becomes available. Problem of cogging torque, among others, which becomes significant along with the increasing output, is improved by new means proposed in the present invention of controlling the distribution of magnetic flux density in the air-gap, in addition to improvement by well known means of controlling a specific shape. The new means in the present invention includes; (1) making demagnetization curve small in the middle part of the magnet in the thrust direction at the end part in the circumferential direction, making use of the reverse magnet field at magnetization, and (2) making use of a difference caused by the heat demagnetization. Thus, a compact high output small DC-motor with a highly accurate revolving performance can be implemented in accordance with the present invention.

What is claimed is:

1. A permanent magnet field small DC motor comprising an arc-shaped permanent magnet fixed in a soft-magnetic frame, wherein
said magnet is provided with an outer surface at both ends in the thrust direction that fits along the inner surface of said soft-magnetic frame, and a certain region in the middle part in the thrust direction of said magnet at both ends in the circumferential direction where said soft-magnetic frame does not function as a back yoke.
2. The permanent magnet field small DC motor of claim 1, wherein a pair of arc-shaped permanent magnets opposing to each other are disposed in the soft-magnetic frame with the outer surface at both ends in the thrust direction fitting along the inner surface of the soft-magnetic frame, and fixed at both ends in the circumferential direction using a spring.
3. The permanent magnet field small DC motor of claim 2, wherein the arc-shaped permanent magnet is compression moulded from rare earth iron based melt-spun flakes and a binder.
4. The permanent magnet field small DC motor of claim 2, wherein the maximum thickness of the arc-shaped magnet is 1 mm or less.
5. The permanent magnet field small DC motor of claim 1, wherein a certain air-gap is provided between the outer surface of the arc-shaped permanent magnet in the middle part in the thrust direction at both ends in the circumferential direction and the soft-magnetic frame.
6. The permanent magnet field small DC motor of claim 3, wherein
curvature of the outer surface of the arc-shaped rare earth magnet in the middle part in the thrust direction is made to be different from that of the outer surface at both ends in the thrust direction in a compression mould so that the soft-magnetic frame does not function as back yoke at the region of the outer surface in the middle part in the thrust direction at both

ends in the circumferential direction.

7. The permanent magnet field small DC motor of claim 1, wherein a pair of arc-shaped rare earth magnets opposing to each other fixed along the inner surface of soft-magnetic frame exhibits different demagnetization curves at least by unsaturated magnetization.

8. The permanent magnet field small DC motor of claim 5, wherein distribution of flux density in the gap with the armature iron core is controlled by once magnetizing the pair of arc-shaped rare earth magnets opposing to each other fixed along the inner surface of soft-magnetic frame and then providing initial demagnetization by heat so that rate of demagnetization increases along with a distance from the centre of magnetic pole towards the ends in the circumferential direction, eventually making the demagnetization rate reaching the greatest at the air-gap formed between the middle part of the outer surface in the thrust direction at both ends in the circumferential direction and the soft-magnetic frame.

9. An optical pickup device comprising the permanent magnetic field small DC motor of claim 1.

A B S T R A C T

A permanent magnet field small DC motor comprising an arc-shaped rare earth magnet of maximum thickness 1mm or less fabricated by compression moulding from rare earth iron based melt-spun flakes and a binder. The magnet is provided with a certain specific portion at both ends in the circumferencial direction, which has no back yoke when the magnet is press-fit in a soft-magnetic frame. The arc-shaped rare earth magnet fabricated by compression moulding from a material containing more rare earth iron based melt-spun flakes exhibits simultaneous increase of both a remanence B_r as a function of magnetizing field and a coercivity H_{cB} and hence exhibits a well-balanced demagnetization (B-H) curves even in an unsaturated magnetized state.