PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

9804661-7
1805.

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :
G06F 13/38, 15/17

A1

(11) International Publication Number: WO 98/43178

(43) International Publication Date: 1 October 1998 (01.10.98)

(21) International Application Number: PCT/US98/05456

(22) International Filing Date: 20 March 1998 (20.03.98)

(30) Priority Data:

60/042,071	25 March 1997 (25.03.97)	US
09/000,711	30 December 1997 (30.12.97)	US

(71) Applicant: INTEL CORPORATION [US/US]; 2200 Mission College Boulevard, P.O. Box 58119, Santa Clara, CA 95052-8119 (US).

(72) Inventors: KNAUERHASE, Robert, Conrad; 4926 S.W. Corbett Avenue #108, Portland, OR 97201 (US). TSO, Michael, Man-Hak; 5744 S.E. Preston Court, Hillsboro, OR 97123 (US).

(74) Agents: HELLER, Paul, H. et al.; Kenyon & Kenyon, 1025 Connecticut Avenue, N.W., Washington, DC 20036 (US).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: SYSTEM FOR DYNAMICALLY CONTROLLING A NETWORK DEVICE

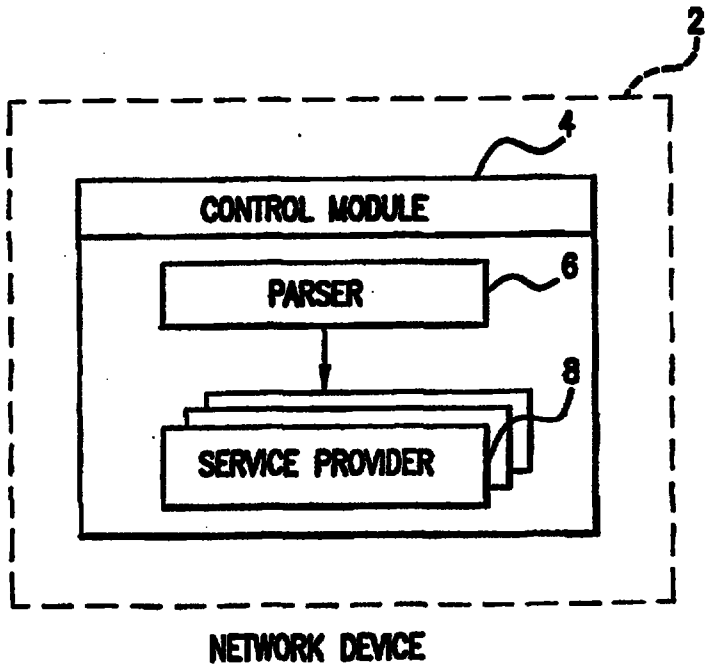

(57) Abstract

A system for dynamically controlling a network device is implemented in a network device (2) including a parser (6) and a service provider (8). The parser (6) includes instructions for selectively invoking the service provider (8) in response to a command parsed from an external input received by the network device (2).