(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
3 January 2014 (03.01.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/000777 A1

(51) International Patent Classification:
E21B 34/14 (2006.01) *E21B 47/12* (2012.01)
E21B 41/00 (2006.01)

(21) International Application Number:
PCT/EP2012/062391

(22) International Filing Date:
26 June 2012 (26.06.2012)

(25) Filing Language: English

(26) Publication Language: English

(72) Inventor; and
(71) Applicant : **NAPIER, Rory Archibald** [GB/GB]; Broomley Mews, Montrose, Angus DD10 9LQ (GB).

(74) Agent: **SCHLEY, Jan**; Fish & Richardson P.C., Highlight Business Towers, Mies-van-der-Rohe-Str. 8, 80807 Munich (DE).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report (Art. 21(3))*

(54) **Title**: REMOTE AND MANUALLY ACTUATED WELL TOOL

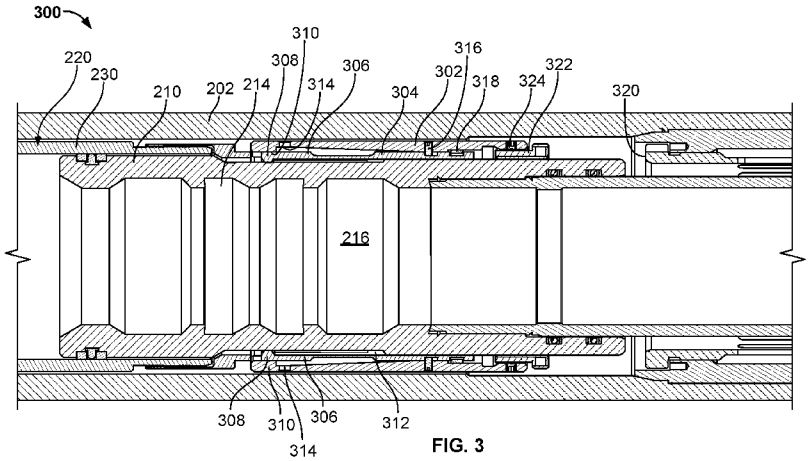


FIG. 3

(57) **Abstract**: A well tool having an actuator sleeve in a housing. The actuator sleeve has an internal shifting tool engaging profile. The tool has an actuator in the housing that is responsive to a remote signal to change from an unactuated state to an actuated state and shift the actuator sleeve from a first position to a second position. A collet in the housing is supported to couple the actuator sleeve to the actuator while the actuator changes from the unactuated state to the actuated state and is unsupported to allow the actuator sleeve to move relative to the actuator when the actuator is in the actuated state.

WO 2014/000777 A1