



(51) International Patent Classification:

B05B 1/02 (2006.01) *B05B 1/30* (2006.01)
B05B 1/04 (2006.01) *B05B 9/00* (2006.01)
B05B 1/12 (2006.01) *B05B 15/00* (2018.01)
B05B 1/14 (2006.01) *B05B 15/65* (2018.01)
B05B 1/16 (2006.01) *B05B 15/658* (2018.01)
B05B 1/20 (2006.01) *B05B 15/68* (2018.01)

(21) International Application Number:

PCT/US2018/017475

(22) International Filing Date:

08 February 2018 (08.02.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/456,549 08 February 2017 (08.02.2017) US

(71) Applicant: **OEM GROUP, LLC** [US/US]; 2120 W. Guadalupe Road, Gilbert, Arizona 85233 (US).

(72) Inventors: **FORGEY, Christian K.**; 1232 Pine Forest Circle, Round Rock, Texas 78665 (US). **NELSON, Mark**; 1062 Boeshore Circle, Reading, Pennsylvania 19605 (US).

TRUFANOV, Alexander; 572 Creekside Drive, Souder-ton, Pennsylvania 18964 (US).

(74) Agent: **BAI, Ari M.** et al.; Suite 1200, One East Wash-ington, Phoenix, Arizona 85004 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: ADJUSTABLE FLOW NOZZLE SYSTEM

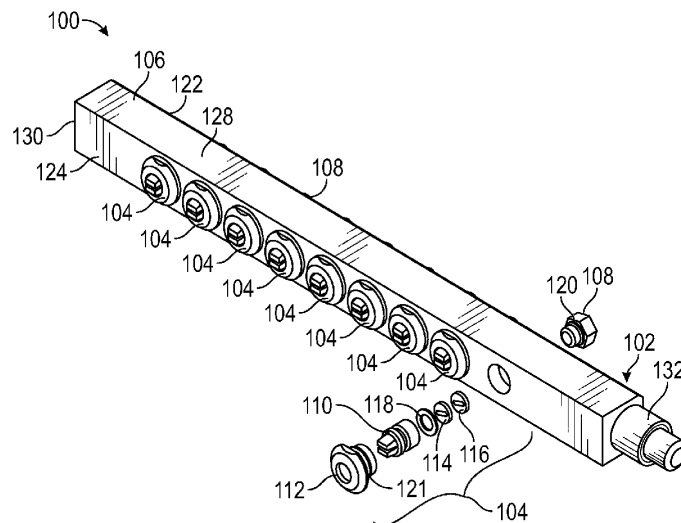


FIG. 2

(57) Abstract: Various embodiments for an adjustable flow nozzle system having a manifold with a plurality of adjustable flow nozzles in which the flow rate of each adjustable flow nozzle may be individually adjusted are described herein.

[Continued on next page]

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))