



- (51) International Patent Classification:
G11C 5/14 (2006.01) *G11C 16/30* (2006.01)
- (21) International Application Number:
PCT/US2015/030786
- (22) International Filing Date:
14 May 2015 (14.05.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/288,618 28 May 2014 (28.05.2014) US
- (71) Applicant: **MICRON TECHNOLOGY, INC.** [US/US];
8000 South Federal Way, Boise, Idaho 83716-9632 (US).
- (72) Inventors: **MIRICHIGNI, Graziano**; Via Aldo Moro 3,
I-20871 Vimercate (IT). **VILLA, Corrado**; Via San
Francesco 31, I-20845 Sovico (IT).
- (74) Agent: **BERGER, Mark R.**; 1201 Marquette Avenue
South, Suite 400, Minneapolis, Minnesota 55403 (US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) Title: PROVIDING POWER AVAILABILITY INFORMATION TO MEMORY

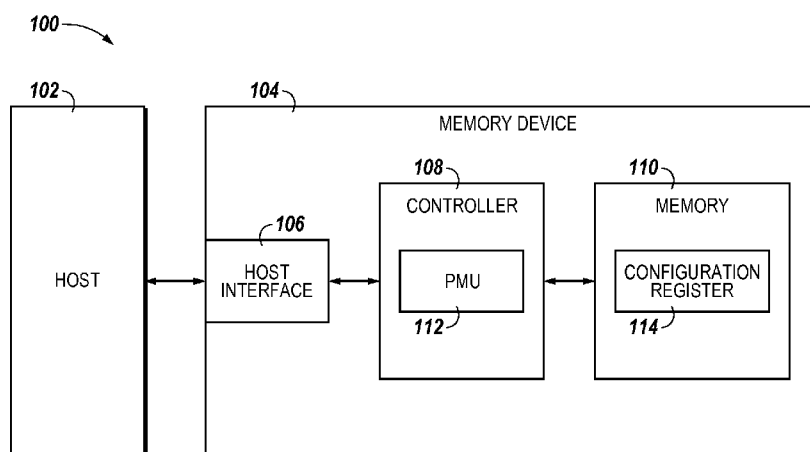


Fig. 1

- (57) Abstract: The present disclosure includes apparatuses and methods for providing power availability information to memory. A number of embodiments include a memory and a controller. The controller is configured to provide power and power availability information to the memory, and the memory is configured to determine whether to adjust its operation based, at least in part, on the power availability information.