

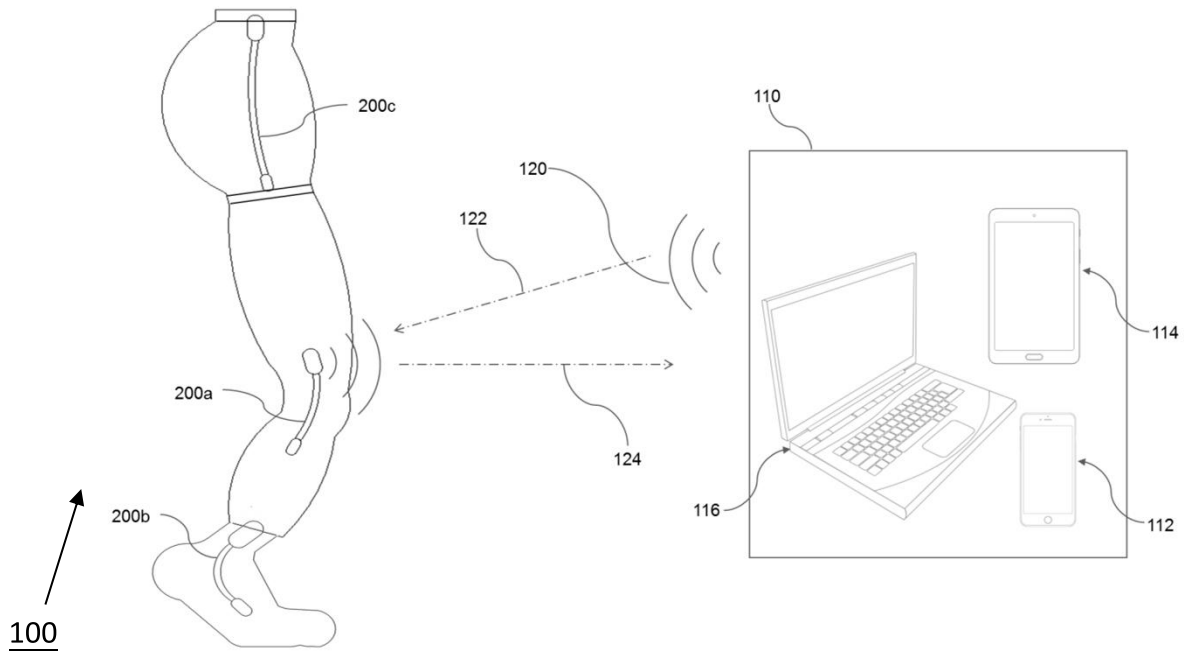


Fig. 1A

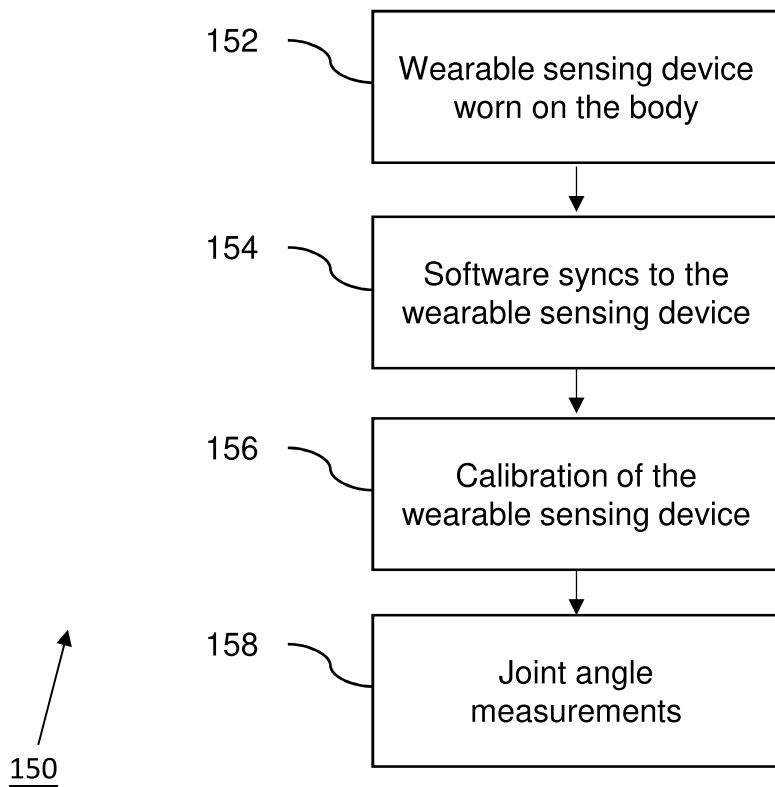


Fig. 1B

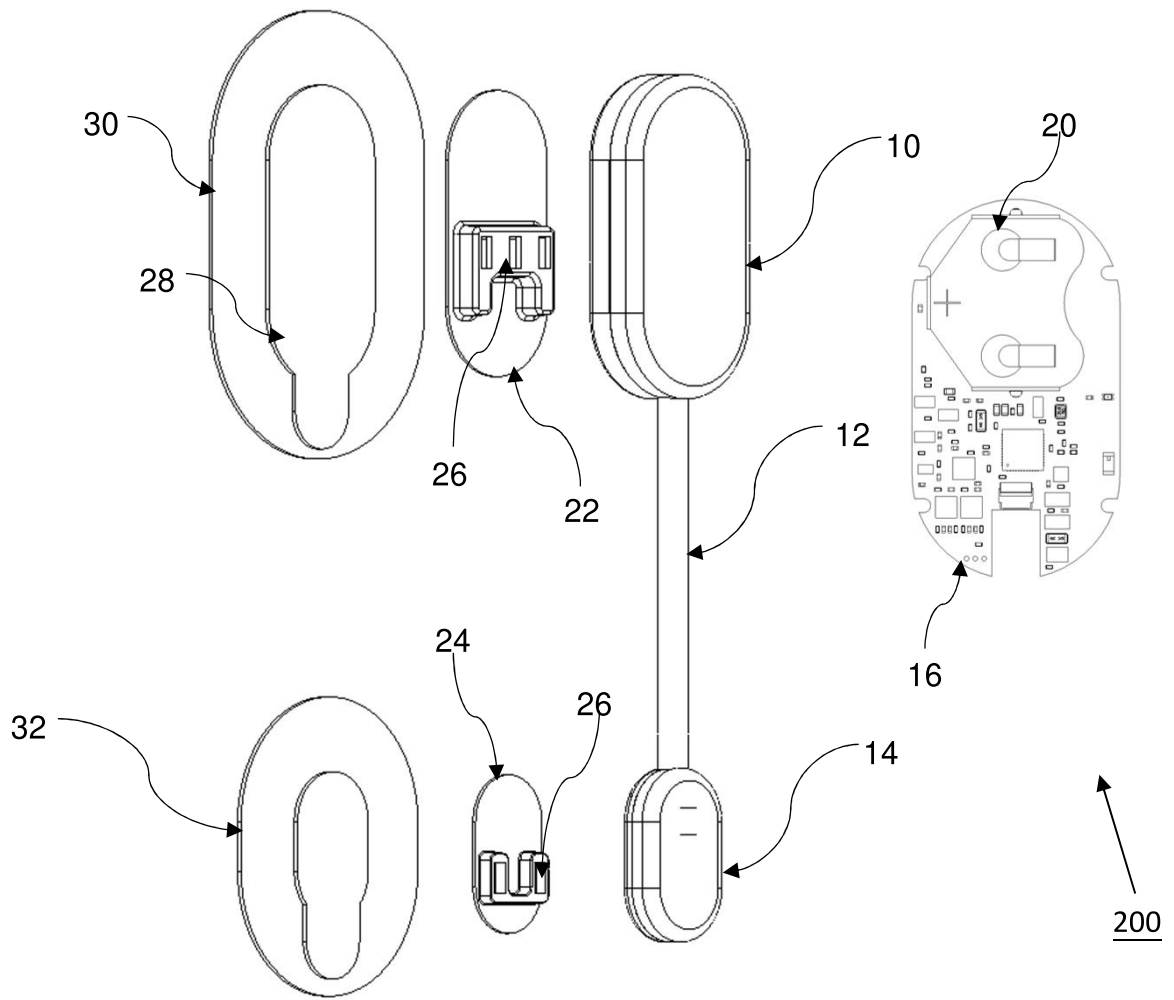


Fig. 2A

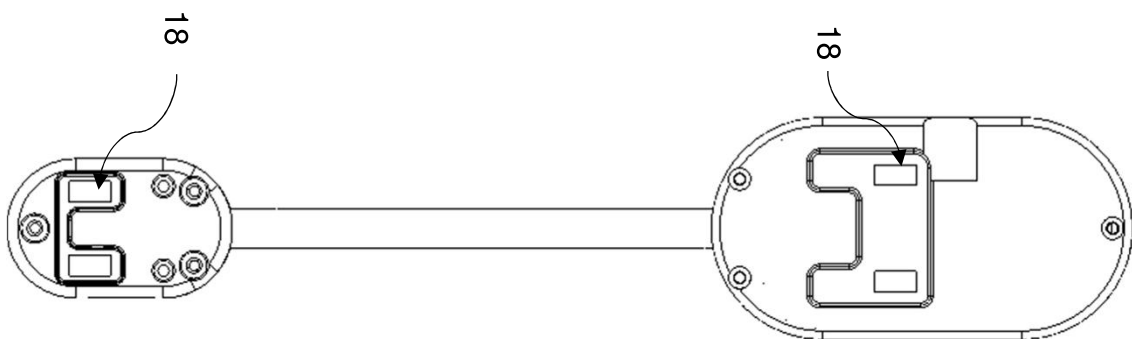


Fig. 2B

FIG. 1 is a perspective view of a cable assembly 350. The assembly includes a cable 38 with a central core 36 and an outer jacket 36'. The cable is connected to a first connector 10 and a second connector 14. A cable braid 46 is shown between the connectors. A dashed line 38' indicates the cable's path.

Fig. 3B

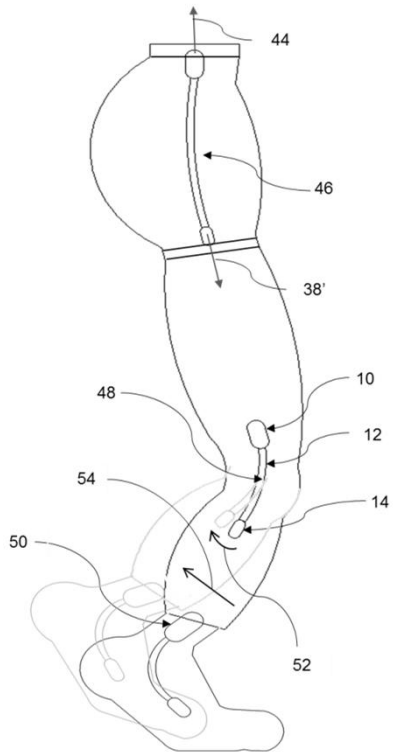


Fig. 4A

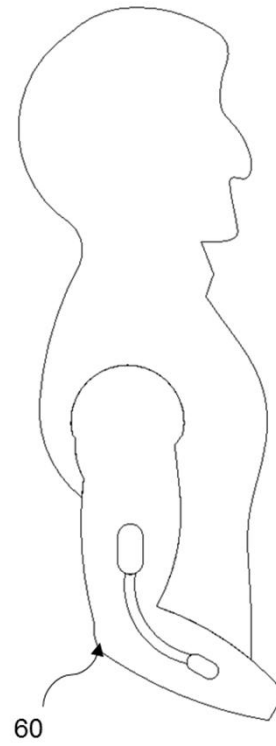


Fig. 4B

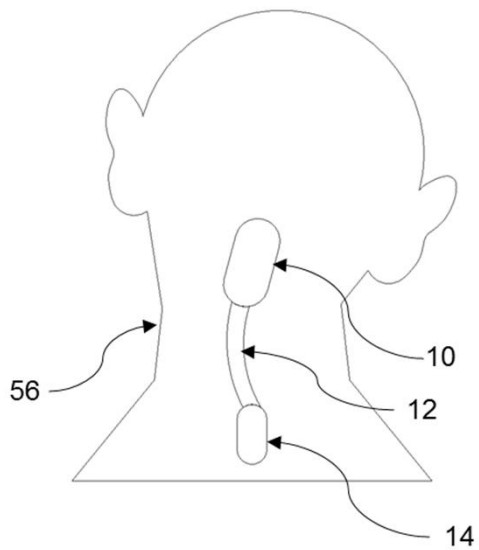


Fig. 4C

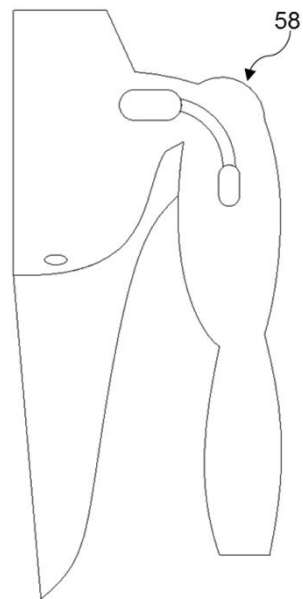


Fig. 4D

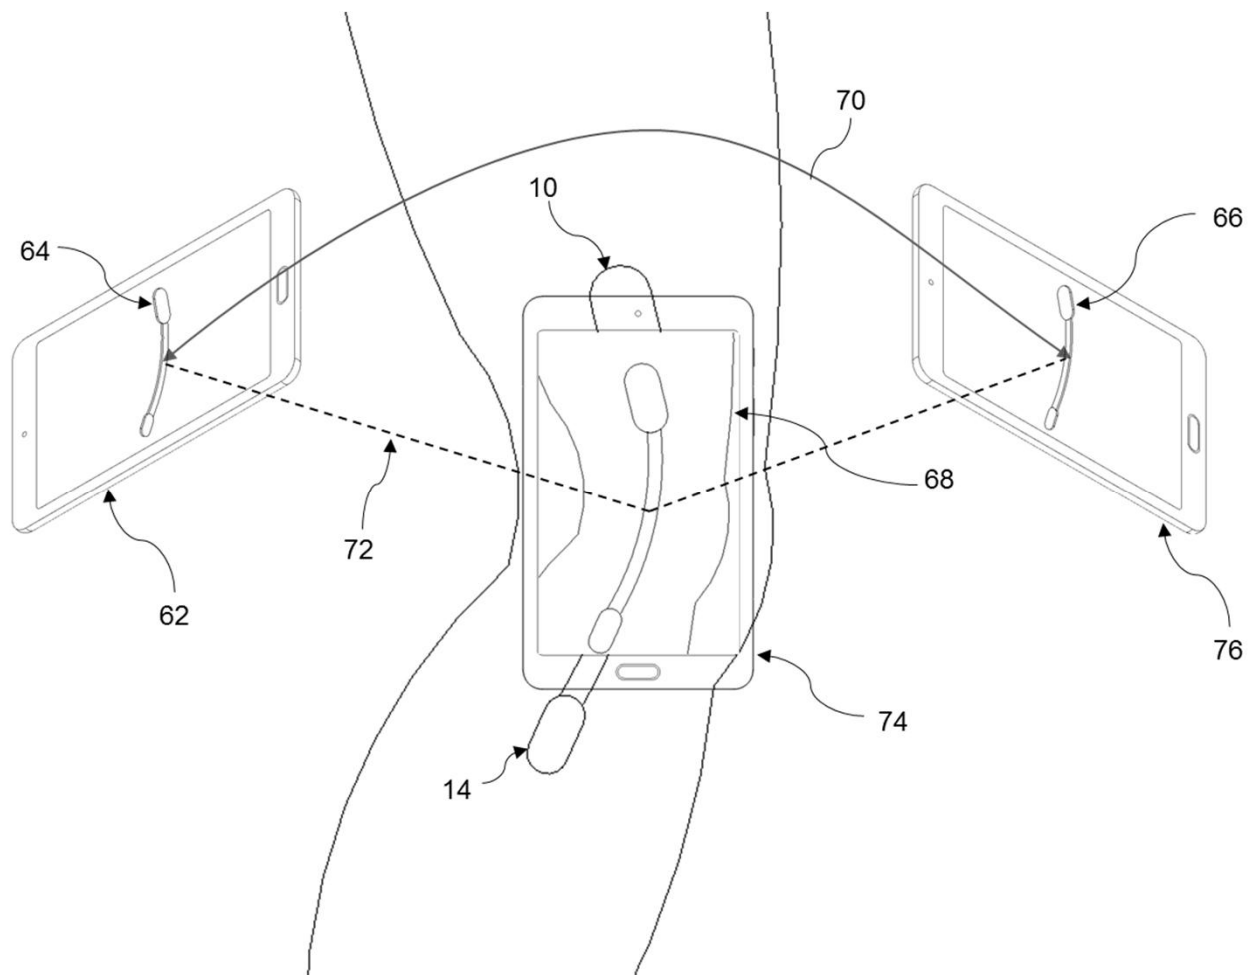


Fig. 5

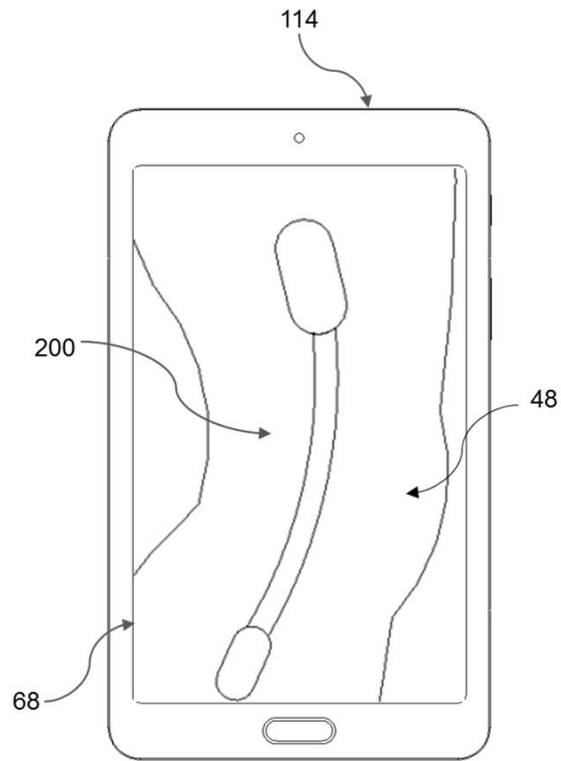


Fig. 6A

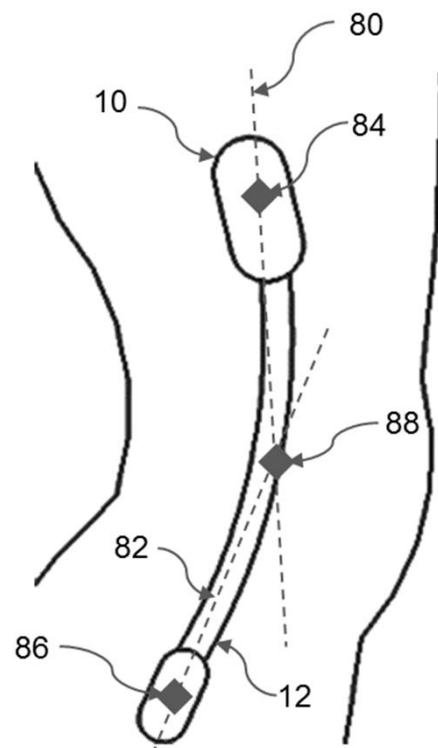


Fig. 6B

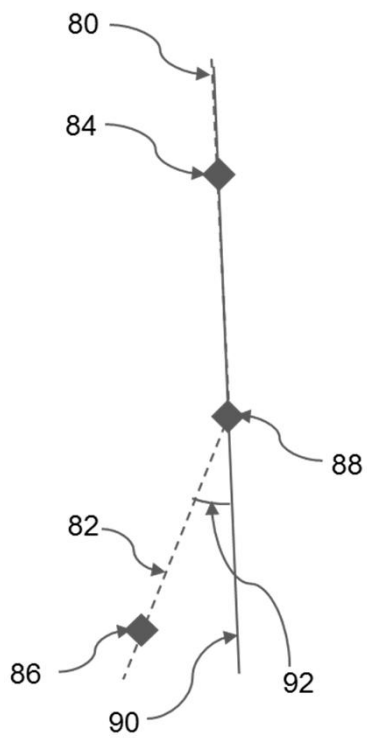


Fig. 6C

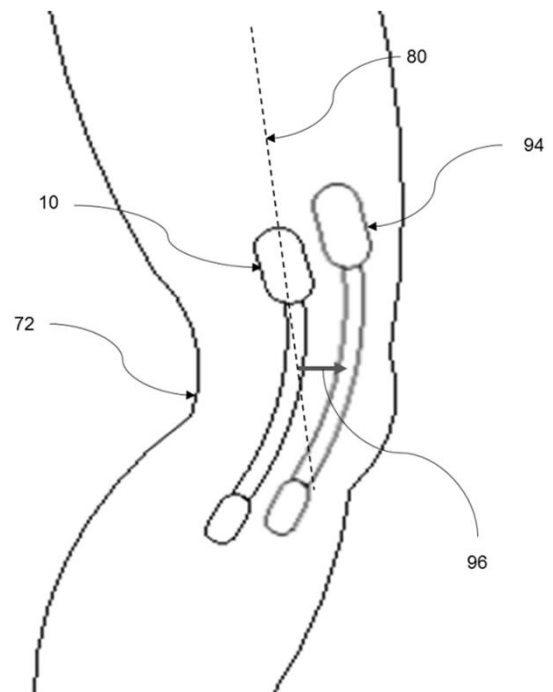


Fig. 6D

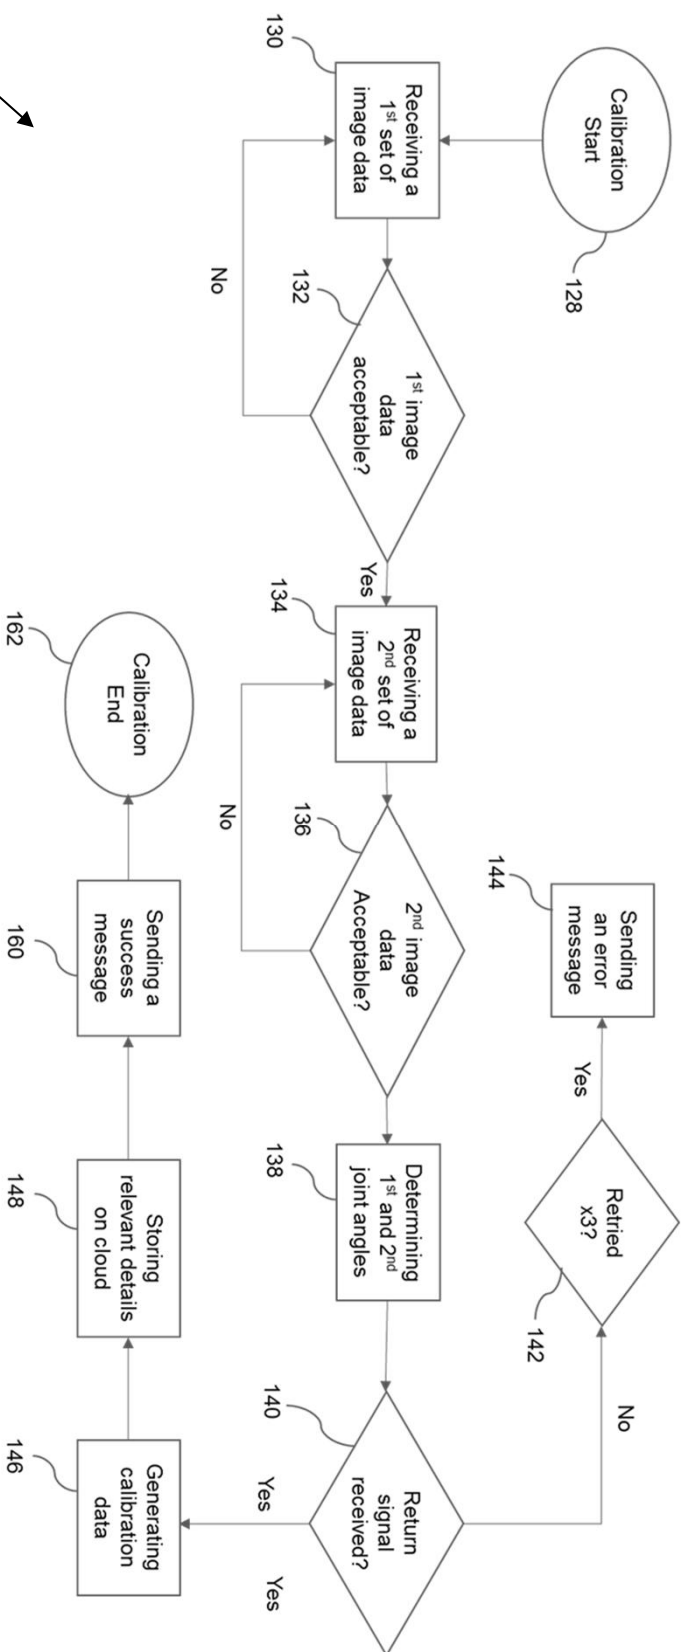


Fig. 7

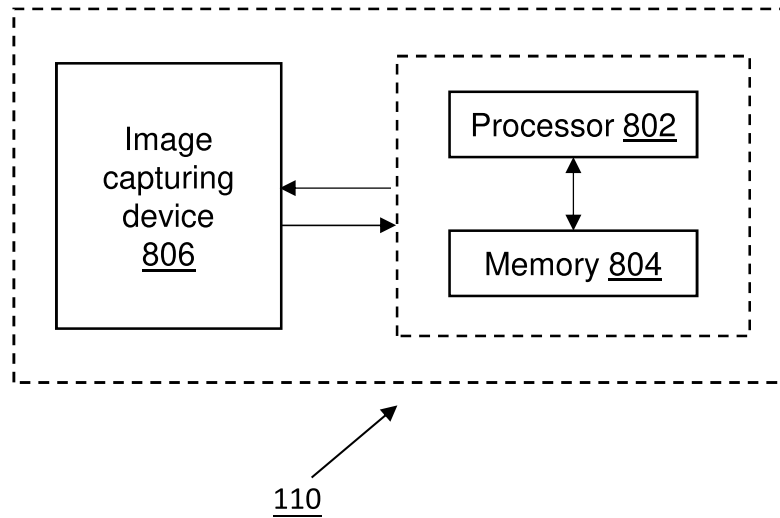


Fig. 8

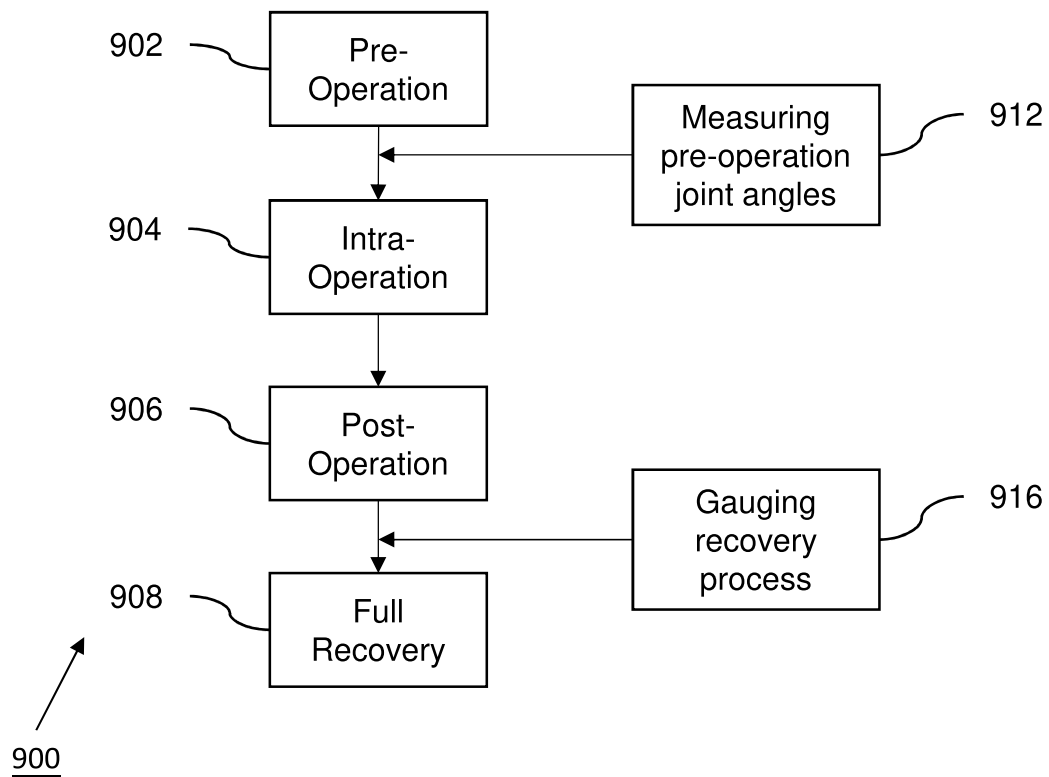


Fig. 9