

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 September 2003 (25.09.2003)


PCT

(10) International Publication Number
WO 03/078975 A3

- (51) International Patent Classification⁷: **G01N 21/15**, 21/85, 33/18
- (21) International Application Number: PCT/US03/07543
- (22) International Filing Date: 13 March 2003 (13.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/364,951 15 March 2002 (15.03.2002) US
- (71) Applicant: **YSI INCORPORATED** [US/US]; 1700/1725 Brannum Lane, P.O. Box 279, Yellow Springs, OH 45387 (US).
- (72) Inventors: **LIZOTTE, Mike**; 56 Rocky Knook Lane, Marion, MA 02738 (US). **HOFFMAN, Chris**; 320 West North College Street, Yellow Springs, OH 45387 (US). **LECHLEITER, Daniel**; 5805 White Oak Court, Indianapolis, IN 46220 (US). **MCDONALD, John**; 606 Sharon Drive, Fairborn, OH 45324 (US).
- (74) Agents: **LEVY, Mark, P.** et al.; Thompson Hine LLP, 2000 Courthouse Plaza NE, 10 West Second Street, Dayton, OH 45402-1758 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: WIPER AND BRUSH DEVICE FOR CLEANING WATER QUALITY SENSORS

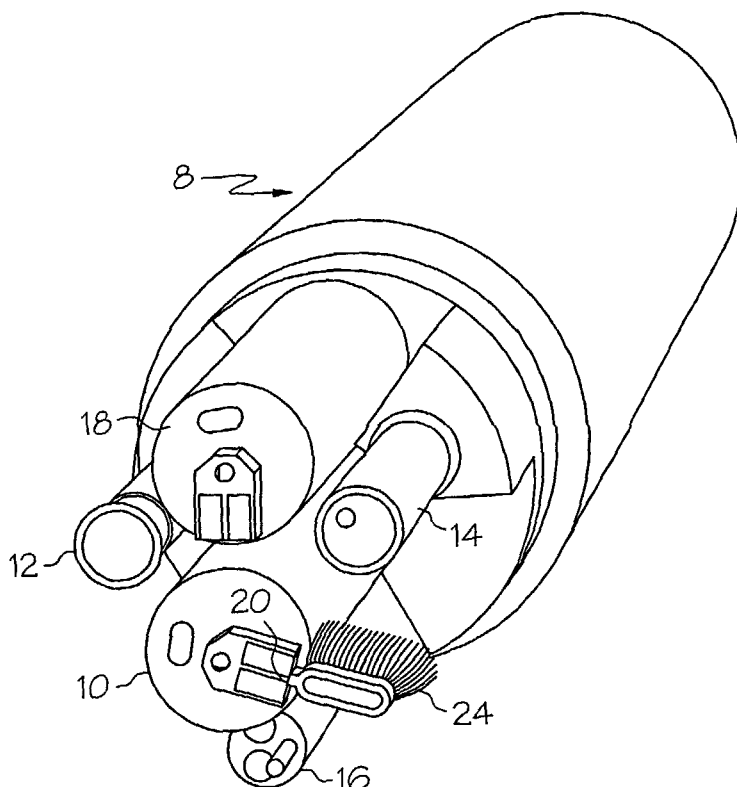

(57) Abstract: A sonde comprising a first sensor and a second sensor adjacent the first sensor, the first sensor including an optical window and a wiper element, the wiper element rotating on a shaft extending from the first sensor so as to clean debris from the window, a brush extending from the wiper element beyond the perimeter of the first sensor such that the brush contacts the adjacent second sensor and removes debris which accumulates on the second sensor.

WO 03/078975 A3



(88) Date of publication of the international search report:

11 December 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.