



(51) International Patent Classification:

E05B 9/00 (2006.01) *E05B 63/04* (2006.01)
E05B 17/00 (2006.01) *E05B 63/08* (2006.01)

(21) International Application Number:

PCT/AU2011/000099

(22) International Filing Date:

4 February 2011 (04.02.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2010900464 5 February 2010 (05.02.2010) AU

(71) Applicant (for all designated States except US): **ASSA ABLOY AUSTRALIA PTY LIMITED** [AU/AU]; 235 Huntingdale Road, Oakleigh, Victoria 3166 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NEWMAN, Donald, John** [AU/AU]; 18 Tyalla Court, Hampton Park, Victoria 3976 (AU).

(74) Agent: **PHILLIPS ORMONDE FITZPATRICK**; Level 21, 22 & 23, 367 Collins Street, Melbourne, Victoria 3000 (AU).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A COVER FOR A MORTICE LOCK ASSEMBLY

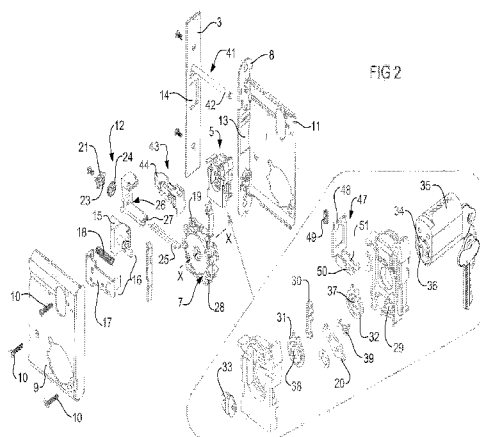

(57) Abstract: This invention relates to a lock assembly (1), in particular a cover (3) for forming part of the lock assembly (1). The lock assembly (1) includes a lock means which controls operation of an actuator assembly (7) that moves a bolt (15) relative to an extended position. The lock means also interacts with an interaction means (4) forming part of the cover (3) so as to retain the cover (3) relative to a housing (2) when the lock means is in a retained condition.