

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 July 2009 (23.07.2009)

PCT

(10) International Publication Number
WO 2009/091398 A1

(51) International Patent Classification:
F25B 45/00 (2006.01)

(21) International Application Number:
PCT/US2008/051313

(22) International Filing Date: 17 January 2008 (17.01.2008)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **CARRIER CORPORATION** [US/US]; One Carrier Place, Farmington, CT 06034 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ASPROVSKI, Zvonko** [US/US]; 7730 Treeline Drive, Liverpool, NV 13090 (US). **LAMENDOLA, Kursten** [US/US]; 913 Tuscarora Road, Chittenango, NY 130307 (US).

(74) Agent: **BIGELOW, Dana, F.**; 250 South Clinton Street, Suite 300, Syracuse, NV 13202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(54) Title: MOUNTING OF PRESSURE RELIEF DEVICES IN A HIGH PRESSURE REFRIGERATION SYSTEM

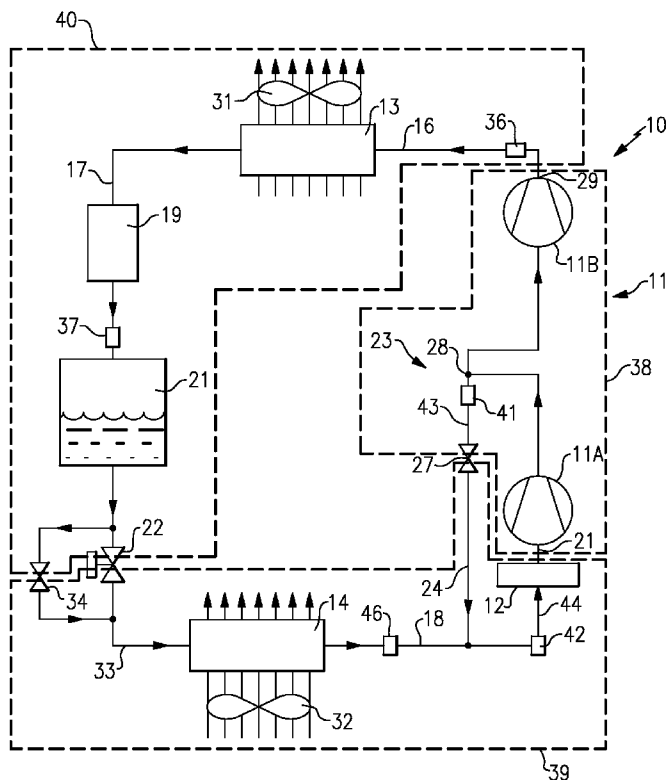


FIG.1

(57) Abstract: A plurality of pressure relief devices are disposed within a refrigeration circuit, and each of the pressure relief devices is located within a compartment that fluidly communicates with the ambient air. Each of the pressure relief devices is oriented so that the release of high pressure vapor therefrom is directed to a rear wall of the compartment. Further, a four sided cover is disposed over each of the pressure relief devices so as to partially contain any released vapor and allow it to be discharged in one direction only.

WO 2009/091398 A1