

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 November 2005 (10.11.2005)

PCT

(10) International Publication Number  
**WO 2005/106166 A1**

(51) International Patent Classification<sup>7</sup>: **E05B 63/08**,  
63/16, 55/04, 13/00, 13/08, E05C 1/06, 1/12

VIC 3809 (AU). **MCMILLAN, Stewart** [AU/AU]; Unit 4,  
65 Brisbane Street, Oxley Park, NSW 2760 (AU).

(21) International Application Number:  
PCT/AU2005/000612

(74) Agents: **HIND, Raymond, S.** et al.; Davies Collison Cave,  
1 Nicholson Street, Melbourne, VIC 3000 (AU).

(22) International Filing Date: 29 April 2005 (29.04.2005)

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,  
MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM,  
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY,  
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU,  
ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004902339 3 May 2004 (03.05.2004) AU

(71) Applicant (for all designated States except US): **DORMA  
DOOR CONTROLS PTY LTD** [AU/AU]; 52 Abbot  
Road, Hallam, VIC 3803 (AU).


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MCKENZIE, Mal-  
colm Robert** [AU/AU]; 6 Portchester Boulevard, Officer,

[Continued on next page]

(54) Title: LOCKS

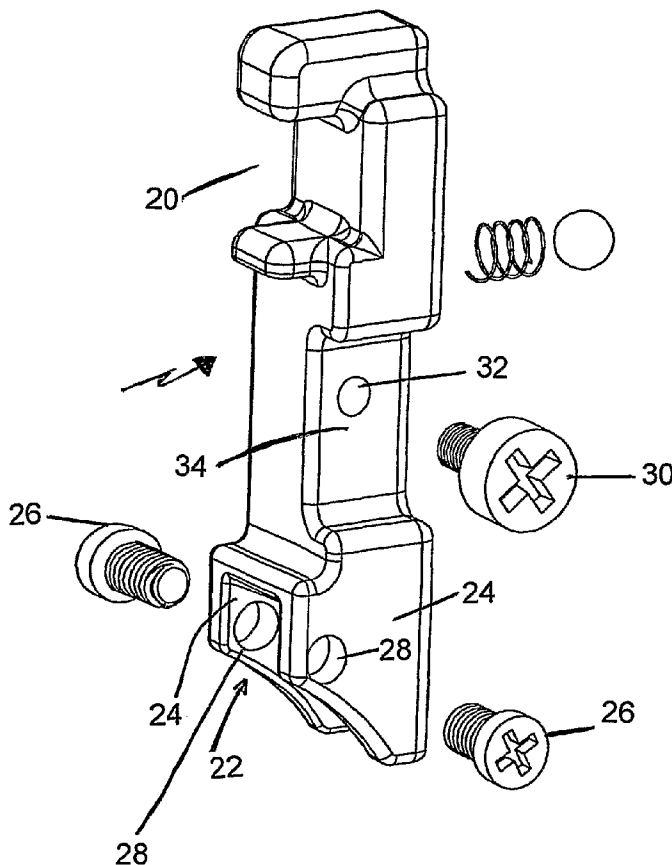

(57) Abstract: A door lock actuatable by a handle at each side of the door has a lock handing system for rendering selectively operative/inoperative a rotary actuator associated with each handle so that the lock can be operated only from one side of the door as selected. The handing system is formed by screws selectively insertable and removable from outside of the casing prior to installation to lock or permit rotation of the corresponding actuator when a lock member has been moved to a locking position, such as by key actuation.

WO 2005/106166 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*