



(51) International Patent Classification:

B25G 3/12 (2006.01) **F16M 13/04** (2006.01)
F16C 11/10 (2006.01) **G05G 1/10** (2006.01)

(21) International Application Number:

PCT/CA2011/000348

(22) International Filing Date:

30 March 2011 (30.03.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/757,453 9 April 2010 (09.04.2010) US

(71) Applicant (for all designated States except US): **SHAPE WLB INC.** [CA/CA]; 3220, 1ère Rue, Suite 507, St-Hubert, Québec J3Y 8Y5 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VALLIÈRES, Charles** [CA/CA]; 2284, Ethel est, Carignan, Québec J3L 4J4 (CA). **GIRARD, Mylène** [CA/CA]; 2284, Ethel Est, Carignan, Québec J3L 4J4 (CA).

(74) Agent: **BENOÎT & CÔTÉ, ASSOCIÉS INC.**; 1001, de Maisonneuve Ouest, Suite 210, Montréal, Québec H3A 3C8 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ADJUSTABLE HANDLE ASSEMBLY WITH LOCKING MECHANISM

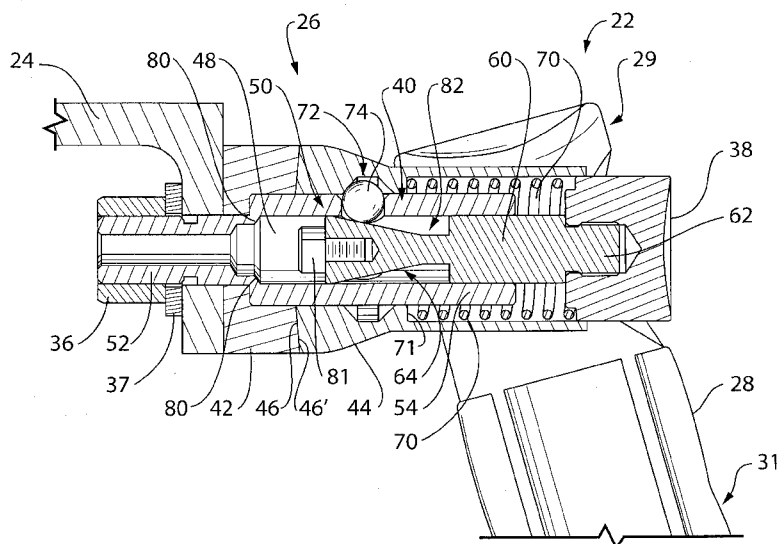


FIG. 2

(57) Abstract: The present document describes a pivotable handle assembly for mounting on a support. The assembly comprises a rotation-blocking portion comprising a pivot axis, the rotation-blocking portion for being rotatable about the pivot axis and relative to the support when in an unlocked position, and when in a locked position, the rotation blocking portion for preventing its rotation about the pivot axis; a handle depending from the rotation blocking portion; and a locking mechanism comprising a push-button and a lock release. The locking mechanism is for locking the rotation-blocking portion in the locked position, and for unlocking the rotation-blocking portion in the unlocked position upon a pushing motion being applied to the push-button to actuate the lock release, the unlocked position thereby allowing the handle to be pivoted about the pivot axis.