

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 March 2001 (15.03.2001)

PCT

(10) International Publication Number
WO 01/19140 A1

(51) International Patent Classification⁷: H05B 3/84, 3/86,
A47G 1/00, A47F 11/04, B60R 1/00, G02B 5/08

(74) Agent: CHRISTIANSEN, John; P.O. Box 287, Port Melbourne, VIC 3207 (AU).

(21) International Application Number: PCT/AU00/01063

(22) International Filing Date:
8 September 2000 (08.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PQ 2720 9 September 1999 (09.09.1999) AU

(71) Applicant and


(72) Inventor: PILLINGER, Barry, Ernest [AU/AU]; Unit 8,
19 Expo Court, Ashmore, QLD 4214 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: LAMINATED ANTI-FOGGING MIRROR ASSEMBLY

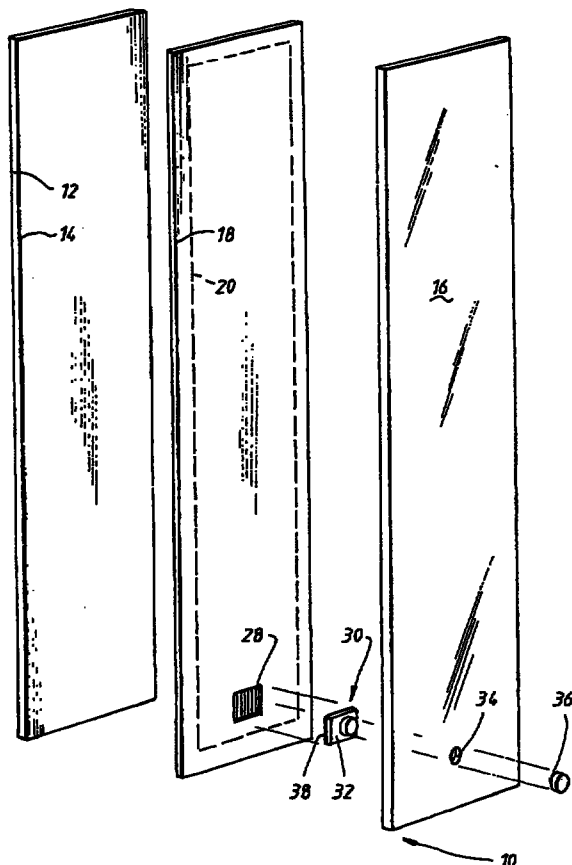

(57) Abstract: An anti-fogging mirror assembly (10) comprises a mirrored sheet (12), a second sheet (16), and a bonding medium (18) adapted to bond together the mirrored sheet (12) and the second sheet (16). The bonding medium (18) has embedded in it a heating pad (20) in the form of an electrical resistance heating element, which, when it is supplied with electrical energy, heats the mirrored sheet (12) such that any moisture on the mirrored sheet (12) is evaporated, and condensation of moisture on the mirrored sheet (12) is prevented. The heating element (20) may be in the form of a polyester substrate printed with a conductive ink, and electrical energy to the heating element (20) may be supplied through upper (68) and lower (26) bus bars. A thermostat (54) may be provided such that when the heating element (20) reaches a predetermined temperature electrical energy is no longer supplied to the heating element (20).

WO 01/19140 A1



Published:

— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.