

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2011 年 3 月 24 日(24.03.2011)

PCT

(10) 国際公開番号
WO 2011/033896 A1

- (51) 国際特許分類:
F2IS 2/00 (2006.01) G02F 1/13357 (2006.01)
G02F 1/1333 (2006.01) F21Y 103/00 (2006.01)
- (21) 国際出願番号: PCT/JP2010/063980
- (22) 国際出願日: 2010 年 8 月 19 日(19.08.2010)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2009-214932 2009 年 9 月 16 日(16.09.2009) JP
- (71) 出願人 (米国を除く全ての指定国について):
シャープ株式会社(SHARP KABUSHIKI KAISHA)
[JP/JP]; 〒5458522 大阪府大阪市阿倍野区長池町
2 2 番 2 2 号 Osaka (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 黒水 泰守
(KUROMIZU Yasumori).
- (74) 代理人: 特許業務法人暁合同特許事務所(AKATSUKI UNION PATENT FIRM); 〒4600008 愛知県

名古屋市中区栄二丁目 1 番 1 号 日土地名古屋ビル 5 階 Aichi (JP).


- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[続葉有]

(54) Title: LIGHTING DEVICE, DISPLAY APPARATUS, AND TELEVISION RECEIVER

(54) 発明の名称: 照明装置、表示装置、及びテレビ受信装置

[図7]

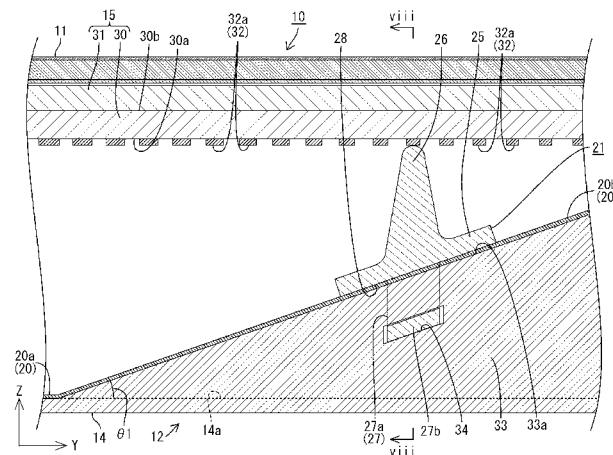

(57) Abstract: In order to suppress the occurrence of uneven luminance in a backlight device, the backlight device (12) is provided with a hot-cathode tube (17) that is a light source, a chassis (14) that has a bottom plate (14a) disposed on the side opposite to the light emission side with respect to the hot-cathode tube (17) and houses the hot-cathode tube (17), a reflection sheet (20) that has a bottom portion (20a) disposed along the bottom plate (14a) and a rising portion (20b) rising from the bottom portion (20a) to the light emission side and reflects light, a spacer portion (33) that is disposed between the bottom plate (14a) and the rising portion (20b), and a retaining member (21) that has a retaining surface (28) for retaining the rising portion (20b) from the light emission side, wherein the retaining member (21) and the spacer portion (33) are provided with a mounting structure (a mounting piece (27b) of a mounting portion (27) and a mounting hole (34)) that enables the retaining member (21) and the spacer portion (33) to be held while the retaining member is mounted to the spacer portion by moving the retaining member (21) in the direction along the rising portion (20b) with respect to the spacer portion (33).

(57) 要約:

[続葉有]

WO 2011/033896 A1