



(51) International Patent Classification:
A61B 3/028 (2006.01)

(21) International Application Number:
PCT/SG2009/000498

(22) International Filing Date:
31 December 2009 (31.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US):
NANYANG POLYTECHNIC [SG/SG]; 180 Ang Mo
Kio Avenue 8, Singapore 569830 (SG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): VARA-
HAMURTHY, Suneetha d/o [SG/SG]; 59 Huddington
Avenue, Singapore 557629 (SG). LEO, Chin Sim
[SG/SG]; 59 Jalan Sukachita, Singapore 358935 (SG).
LIM, Wei Kheong Jimmy [SG/SG]; 2 Cornwall Gar-
dens, #03-10, Singapore 269632 (SG).

(74) Agent: ELLA CHEONG SPRUSON & FERGUSON
(SINGAPORE) PTE LTD; P.O. Box 1531, Robinson
Road Post Office, Singapore 903031 (SG).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: VISUAL ACUITY ASSESSMENT SYSTEM AND METHOD

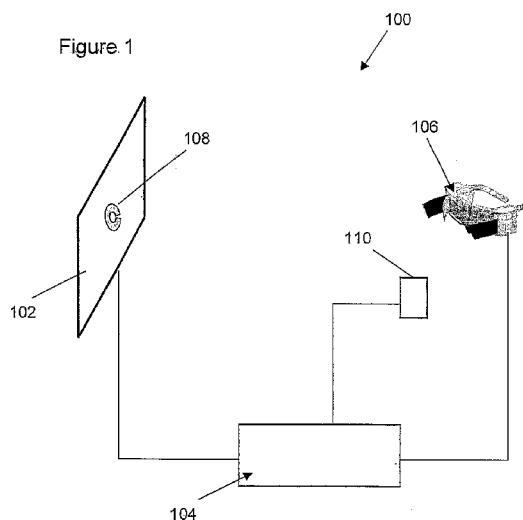

(57) Abstract: A visual acuity assessment system and method. The system comprises a display configured to display an element of an eye test chart; a computing device coupled to the display for controlling at least a size and orientation of the element of the eye test chart; and an eye occluder coupled to the computing device, wherein the computing device controls the eye occluder for selectively occluding an eye of a test subject.