



(51) International Patent Classification:

F16F 9/02 (2006.01) *F16F 9/43* (2006.01)
E02D 13/00 (2006.01) *E02D 7/18* (2006.01)
F16F 15/027 (2006.01) *F16F 9/54* (2006.01)
E02D 7/02 (2006.01)

(21) International Application Number:

PCT/AU2011/000133

(22) International Filing Date:

9 February 2011 (09.02.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2010902364 28 May 2010 (28.05.2010) AU
61/388,700 1 October 2010 (01.10.2010) US

(71) Applicant (for all designated States except US): **NEGA-SHOCK PTY LIMITED** [AU/AU]; C/- Davies Collison Cave, Level 14, 255 Elizabeth Street, Sydney, New South 2000 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TIGHE, Peter John** [AU/AU]; 11 Favell Street, Toongabbie, New South Wales 2146 (AU).

(74) Agents: **REYNOLDS, Simon Peter** et al.; Davies Collison Cave, Level 14, 255 Elizabeth Street, Sydney, NSW 2000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,

[Continued on next page]

(54) Title: VIBRATION DAMPENING DEVICE

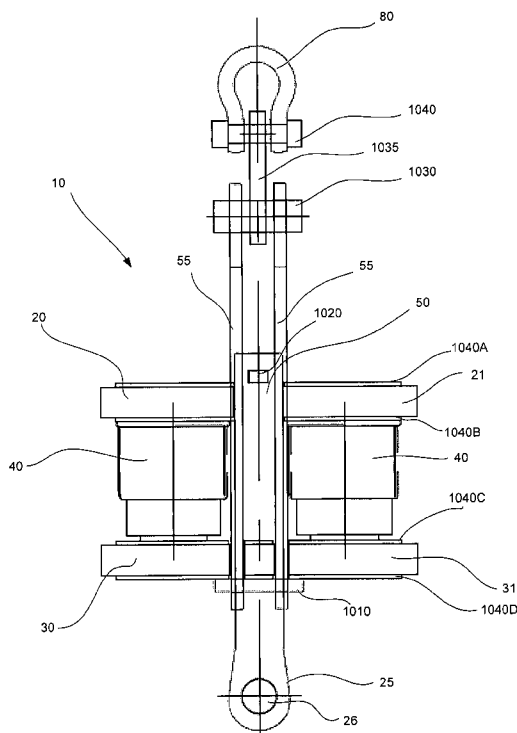


FIGURE 10

(57) Abstract: A vibration dampening device (10) including: a first section (20) having a first section support assembly (25) for supporting vibratory equipment (140); a second section 30 having a second section support assembly (35) for allowing the vibration dampening device (10) to be supported by a support apparatus (100); and one or more fluid fillable absorbers (40) located between the first and second sections (20,30), wherein the one or more fluid fillable absorbers (40) are configured to absorb at least a portion of a vibratory force transferred from operation of the vibratory equipment (140).



ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*