PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : A61M 25/06, 5/32

A1

(11) International Publication Number: WO 96/32981

(43) International Publication Date: 24 October 1996 (24.10.96)

(21) International Application Number: PCT/US95/04501

(22) International Filing Date: 17 April 1995 (17.04.95)

(71) Applicant: MED DESIGN CORPORATION [US/US]; Suite 1910, 121 South Broad Street, Philadelphia, PA 19107 (US).


(72) Inventors: BOTICH, Michael, S.; 336 Highland Drive, Oxnard, CA 93035 (US). HALSETH, Thor, S.; 1223 Village Court, Simi Valley, CA 93065 (US).

(74) Agents: BERRYHILL, John, B. et al.; Dann, Dorfman, Herrell and Skillman, Suite 720, 1601 Market Street, Philadelphia, PA 19103 (US).

(81) Designated States: AU, BG, BR, CA, CN, ES, FI, HU, JP, KR, MX, NO, PL, RO, RU, SG, UA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: SAFETY STYLET FOR INTRAVENOUS CATHETER INSERTION

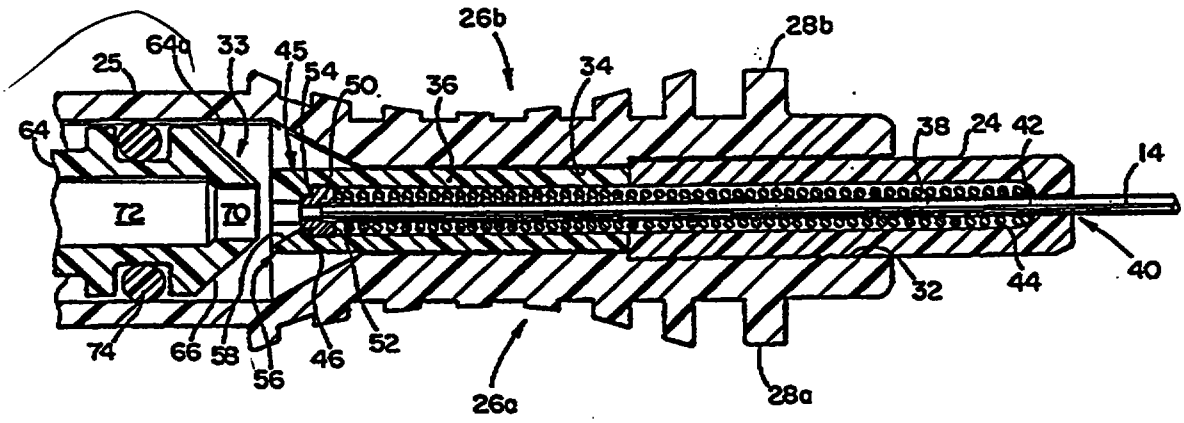

(57) Abstract

A catheter insertion device (10) has a stylet (12) with a needle (14) extending therefrom. A catheter (16) has a cannula (20) surrounding the needle (14) and a connection hub (22) supported upon an alignment member (24) at the front of the stylet (12). A spring (44) exerts a rearward force upon the needle (14). A needle retaining member (14) having a releasable latch mechanism is positioned within the stylet (12) for counteracting the rearward force of the spring (44) and holding the needle in the extended position. After insertion of the catheter (16) within a blood vessel of a patient, a predetermined force is applied to an actuating member (64) protruding from the rear of the stylet (12). The actuating member (64) releases the latch mechanism, and the needle (44) is propelled by the spring (44) to be permanently retained within an internal cavity (72) of the stylet (12).