(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
29 April 2010 (29.04.2010)

PCT

(10) International Publication Number
WO 2010/046522 A1

(51) International Patent Classification:
B66B 1/18 (2006.01)

(21) International Application Number:
PCT/FI2009/000092

(22) International Filing Date:
23 October 2009 (23.10.2009)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20080590 24 October 2008 (24.10.2008) FI

(71) Applicant *(for all designated States except US)*: **KONE CORPORATION** [FI/FI]; Kartanontie 1, FIN-00330 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **SUIHKONEN, Kari** [FI/FI]; Tykontie 3, FIN-05840 Hyvinkää (FI). **SIIKONEN, Marja-Liisa** [FI/FI]; Sotkatie 4 A 8, FIN-00200 Helsinki (FI).

(74) Agent: **KONE CORPORATION**; Patent Department, P.O. Box 677, FIN-05801 Hyvinkää (FI).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

[Continued on next page]

(54) Title: ELEVATOR SYSTEM

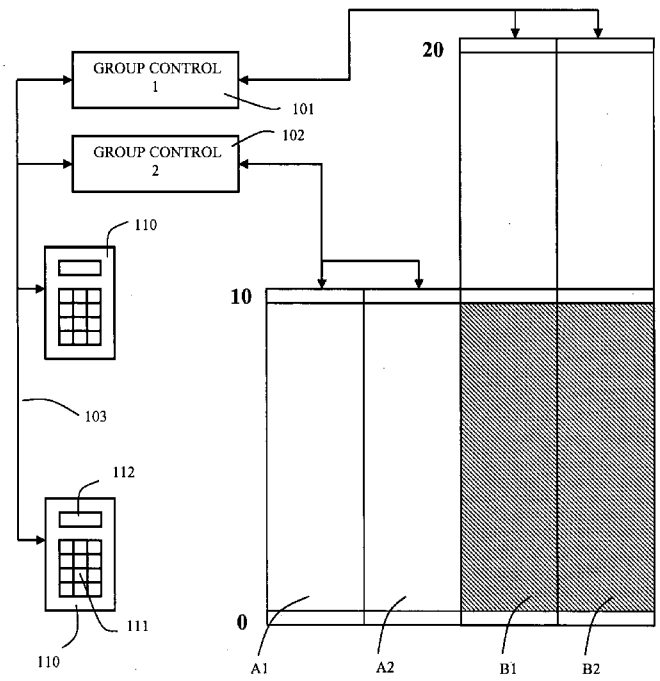

Fig. 1

(57) Abstract: The present invention discloses a method and a system for dividing destination calls in an elevator system, which comprises at least two elevator groups, which elevator groups have one or more shared floors and also destination call appliances on at least the aforementioned shared floors for receiving destination calls given by passengers. The destination call appliances are connected to the group controls of the elevator groups, and the destination calls given by passengers are divided between the elevator groups on the basis of the defined division criteria.

WO 2010/046522 A1

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*