



(51) International Patent Classification:

F41A 17/64 (2006.01) F41A 25/00 (2006.01)
F41A 3/10 (2006.01) F41A 19/36 (2006.01)

(21) International Application Number:

PCT/IB2024/059384

(22) International Filing Date:

26 September 2024 (26.09.2024)

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:

102023000020628 05 October 2023 (05.10.2023) IT

(71) Applicant: **LEONARDO S.P.A** [IT/IT]; Piazza Monte
Grappa, 4, 00195 Roma (IT).

(72) Inventors: **BRUSCHI, Andrea**; Via Nuova,15, 19020
Bolano (SP) (IT). **SCHETTINO, Michele**; c/o LEONAR-
DO S.P.A. DIVISIONE SISTEMI DI DIFESA, VIA
Valdilocchi, 15, 19126 La Spezia (IT).

(74) Agent: **VITILLO, Giuseppe**; c/o Barzanò & Zanardo Mi-
lano S.p.A., C.so Vittorio Emanuele II°, 61, 10128 Torino
(IT).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

(54) Title: FIRE INTERFERENCE DEVICE AND RELATED FIREARM

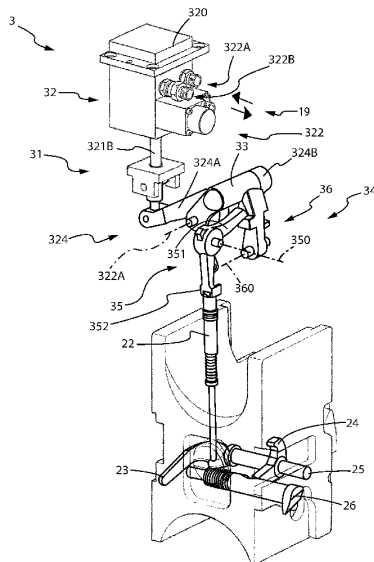


Fig. 5

(57) Abstract: Fire interference device (3) for a firearm (1), adapted to prevent movements of a safety element (22) in order to prevent the release of a blowback mass (21); comprising: a fixed portion (31), adapted to be mounted on a cradle (12), comprising: an electro-hydraulic actuator (32); a control unit (30), adapted to control the electro-hydraulic actuator (32); a cylindrical cam (33), whereupon the actuator (32) acts, adapted to assume a raised configuration and a lowered configuration; and a movable portion (34), adapted to be mounted on a breech ring (13), comprising: a first lever (35) comprising: a horizontal arm (351), adapted to be operated by the cylindrical cam (33); and a vertical arm (352), adapted to engage the safety element (22); and a retaining lever (36) adapted to lock the first lever (35). The retaining lever (36) is adapted to allow the safety element (22) to snap only when the horizontal arm (351) is engaged by the cylindrical cam (33) in the lowered configuration and the retaining lever (36) is clear of the cylindrical cam (33).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*