

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
16 January 2003 (16.01.2003)

PCT

(10) International Publication Number
WO 03/005528 A3(51) International Patent Classification⁷: **H02J 7/00**

(21) International Application Number: PCT/US02/21041

(22) International Filing Date: 3 July 2002 (03.07.2002)


(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/898,680 3 July 2001 (03.07.2001) US(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).(72) Inventors: **BALLANTYNE, GARY, J.**; 123A Studholme
Street, Somerfield, Christchurch 8002 (NZ). **BARGROFF,**
Keith; 2616 Snowdrop Street, San Diego, CA 92105 (US).
CHAN, Paul, L.; 814 Nardo Road, Encinitas, CA 92024
(US). **KLAREN, Jonathan**; 12062 Sepia Court, San
Diego, CA 92128 (US). **PERSICO, Charles, J.**; 18141
Querida Sol, Rancho Santa Fe, CA 92067 (US). **SCOTT,**
Walter, Charles; 11815 Arborlake Way, San Diego, CA92131 (US). **SITHIDETH, Somphou**; 2516 Valley Waters
Court, Spring Valley, CA 91978 (US).(74) Agents: **WADSWORTH, Philip, R.** et al.; Qualcomm In-
corporated, 5775 Morehouse Drive, San Diego, CA 92121-
1714 (US).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN,
YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DUAL MODE POWER SUPPLY

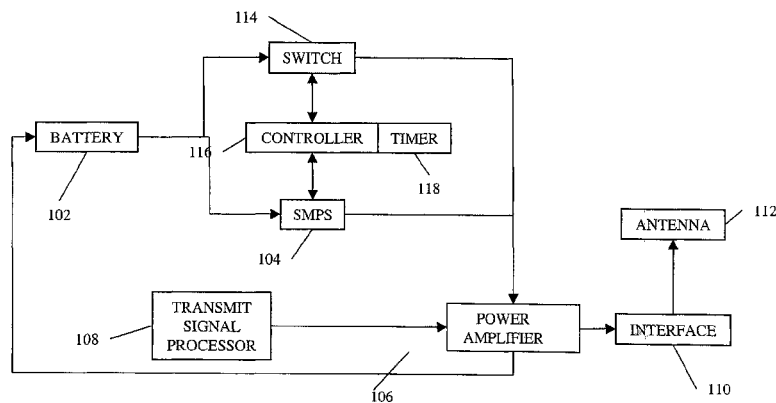

(57) Abstract: A battery (102) powers a wireless telephone's power amplifier (106) through a Switch Mode Power Supply (SMPS) (104). The SMPS has a capacity lower than the maximum power requirements of the amplifier. When a controller (116) senses that an amplifier power-requirements threshold has been exceeded, it closes a switch (114) parallel to the SMPS, allowing power to flow from the battery to the amplifier without passing through the SMPS. This architecture allows the use of a smaller SMPS, and eliminates SMPS-generated noise to the amplifier when the amplifier is least able to tolerate such noise, namely, under high power conditions.



WO 03/005528 A3



Published:

— *with international search report*

(15) Information about Correction:

see PCT Gazette No. 40/2003 of 2 October 2003, Section II

(88) Date of publication of the international search report:

10 July 2003

(48) Date of publication of this corrected version:

2 October 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.