
COPPER (I) COMPOUNDS USEFUL AS DEPOSITION PRECURSORS OF COPPER THIN FILMS

FIELD OF THE INVENTION

[0001] The present invention relates generally to novel copper (I) amidinates and their synthesis, and to a method for production of copper circuits in microelectronic device structures using the novel copper precursors.

DESCRIPTION OF THE RELATED ART

[0002] As a result of its low resistivity, low contact resistance, and ability to enhance device performance through the reduction of RC time delays, copper has emerged as a preferred metal for metallization of very large scale integrated (VLSI) devices. Copper metallization has been adopted by many semiconductor device manufacturers for production of microelectronic chips, thin-film recording heads and packaging components.

[0003] Chemical vapor deposition (CVD) of copper provides uniform coverage for the metallization. Atomic layer deposition (ALD), which is a modified CVD process, also provides uniform coverage which is critical for copper seed layers. Liquid CVD precursors and/or solid precursors dissolved into solvents enable direct injection and/or the liquid delivery of precursors into a CVD or ALD vaporizer unit. The accurate and precise delivery rate can be obtained through volumetric metering to achieve reproducibility during CVD or ALD metallization of a VLSI device.

[0004] Many fluorine and/or oxygen-containing copper CVD precursors are commercially available, including (hfac)Cu(MHY), (hfac)Cu(3-hexyne), (hfac)Cu(DMCO) and (hfac)Cu(VTMS), wherein hfac = 1,1,1,5,5,5-

hexafluoroacetylacetonato, MHY = 2-methyl-1-hexen-3-yne, DMCOD = dimethylcyclooctadiene, and VTMS = vinyltrimethylsilane.

[0005] Copper metallization in integrated circuit manufacture typically utilizes a barrier layer between the copper layer and the underlying structure in order to prevent detrimental effects that may be caused by the interaction of a copper layer with other portions of the integrated circuit. A wide range of barrier materials is conventionally utilized, including materials comprising metals, metal nitrides, metal silicides, and metal silicon nitrides. Exemplary barrier materials include titanium nitride, titanium silicide, tantalum nitride, tantalum silicide, tantalum silicon nitrides, niobium nitrides, niobium silicon nitrides, tungsten nitride, and tungsten silicide. In instances where (hfac)CuL type precursors are used for copper metallization, interfacial layers are formed between the barrier layer and the copper layer, which cause the metallization to have poor adhesion and high contact resistivity.


[0006] The deficiencies of inferior adhesion and excessively high contact resistivity incident to formation of oxygen- and/or fluorine-containing interfacial layers when using (hfac)CuL copper precursors has been attributed to the hfac ligand, which contains both oxygen and fluorine. To overcome such deficiencies, it would be a significant advance in the art to provide copper precursors having a reduced oxy/fluoro content. It would be particularly advantageous to provide copper precursors of an oxygen-free character.

[0007] It is accordingly an object of the present invention to provide new anoxic (oxygen-free and fluorine-free) copper precursors and formulations, as well as methods of forming copper in the manufacturing of integrated circuits and other microelectronic device structures using such precursors and formulations.

SUMMARY OF THE INVENTION

[0008] The present invention relates generally to copper (I) amidinate compounds, which are advantageously of an oxygen-free and fluorine-free character, useful as source reagents for forming copper on substrates with improved adhesion, and to methods of using such copper (I) amidinate compounds.

[0009] The present invention in one aspect relates to a copper precursor compound of the formula:

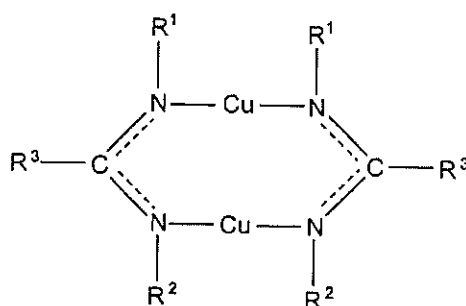

wherein:

R^1 and R^2 may be the same as or different from one another and each is independently selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups (e.g., -SiR_3 , wherein R is independently selected from the group consisting of $\text{C}_1\text{-C}_6$ alkyl);


R^3 is selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and is independently selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

with the proviso that when R^1 and R^2 are isopropyl groups, R^3 is not a methyl group.

[0010] In another aspect, the present invention relates to a copper precursor formulation, comprising:

FIG. 1 is a schematic diagram of a copper precursor compound.

(a) a copper precursor compound of the formula:

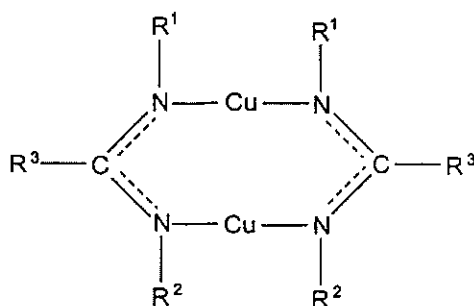


wherein:

R^1 and R^2 may be the same as or different from one another and each is independently selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

R^3 is selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and is independently selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

(b) a solvent composition for the precursor compound.

[0011] In yet another aspect, the present invention relates to a method of depositing copper on a substrate, comprising volatilizing a copper precursor of the formula:

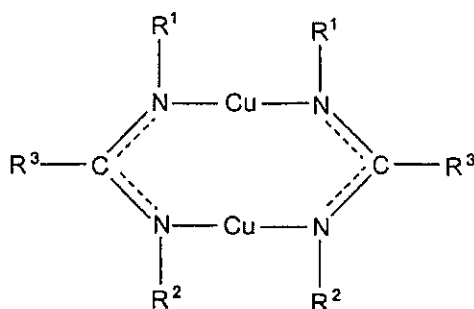

wherein:

~~FIG. 1. 1H-NMR plot for copper (I) 2-isopropyl-1,3-diisopropylamidinate.~~

R¹ and R² may be the same as or different from one another and each is independently selected from the group consisting of H, C₁-C₆ alkyl, C₃-C₇ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

R³ is selected from the group consisting of H, C₁-C₆ alkyl, C₃-C₇ cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR⁴R⁵, where R⁴ and R⁵ may be the same as or different from one another and is independently selected from the group consisting of H, C₁-C₆ alkyl, C₃-C₇ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

with the proviso that when R¹ and R² are isopropyl groups, R³ is not a methyl group, to form a precursor vapor and contacting the precursor vapor with the substrate under elevated temperature vapor decomposition conditions to deposit copper on the substrate.

[0012] Other aspects, features and embodiments of the invention will be more fully apparent from the ensuing disclosure and appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Figure 1 is an ¹H-NMR plot for copper (I) 2-isopropyl-1,3-diisopropylamidinate.

[0014] Figure 2 is a simultaneous thermal analysis (STA)/differential scanning calorimetry (DSC) plot for copper (I) 2-isopropyl-1,3-diisopropylamidinate.

[0015] Figure 3 is an ORTEP structure for copper (I) 2-isopropyl-1,3-diisopropylamidinate.


[0016] Figure 4 is an STA/DSC plot for copper (I) 2-dimethylamino-1,3-diisopropylamidinate.

[0017] Figure 5 is an ORTEP structure for copper (I) 2-dimethylamino-1,3-diisopropylamidinate.


DETAILED DESCRIPTION OF THE INVENTION AND PREFERRED EMBODIMENTS THEREOF

[0018] The present invention relates to novel copper (I) amidinate precursors for the CVD or ALD formation of copper thin films on substrates, and to corresponding processes for using such precursors.

[0019] Amidinates are bulky monoanionic ligands which have the basic chemical structure:



[0020] In one aspect, the invention provides a compound of the formula:

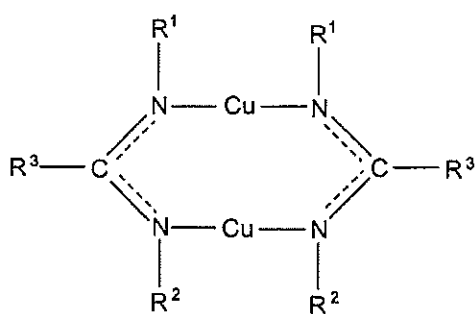

(1)

wherein:

Formula 1: Substituted Diamides


R^1 and R^2 may be the same as or different from one another and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl aryl, and hydrocarbyl derivatives of silyl groups (e.g., $-SiR_3$, wherein R is independently selected from the group consisting of C_1 - C_6 alkyl);

R^3 is selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;


with the proviso that when R^1 and R^2 are isopropyl groups, R^3 is not a methyl group.

[0021] The compounds of formula (1) are usefully employed for forming copper thin films by CVD or ALD processes, utilizing process conditions, including appertaining temperatures, pressures, concentrations, flow rates and CVD techniques, as readily determinable within the skill of the art for a given application.



[0022] Preferred compounds of formula (1) include copper (I) 2-isopropyl-1,3-diisopropylamidinate:

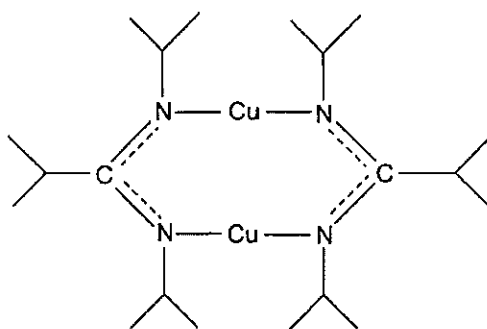

and copper (I) 2-dimethylamino-1,3-diisopropylamidinate:

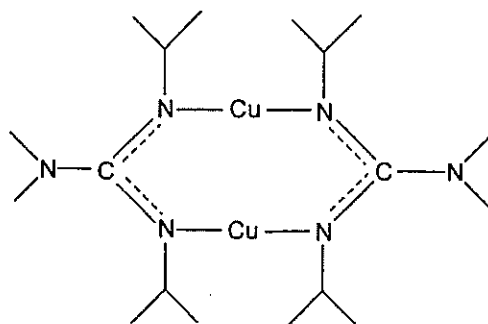

[0023] Compounds of formula (1) are readily synthesized according to the following equations (2) and (3):

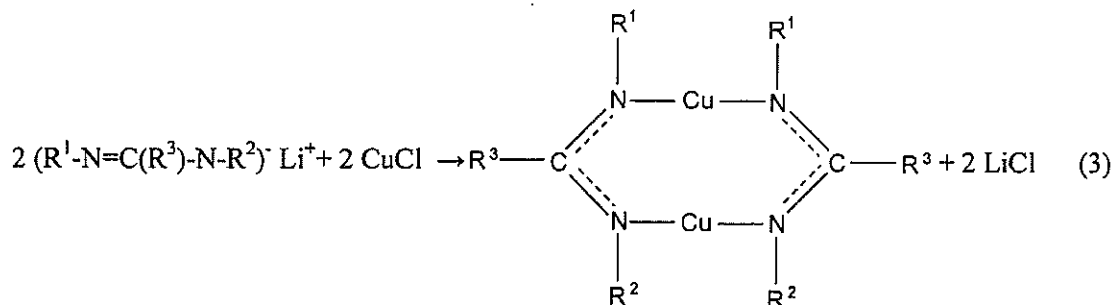

as hereinafter more fully described in the examples herein.

[0024] In CVD or ALD usage, the copper (I) precursors of the invention are volatilized to form a precursor vapor that is then contacted with a substrate under elevated temperature vapor decomposition conditions to deposit copper on the substrate.

[0025] Copper (I) 2-isopropyl-1,3-diisopropylamidinate and copper (I) 2-dimethylamino-1,3-diisopropylamidinate are both volatile and thermally stable, and are usefully employed as copper CVD or ALD precursors under reducing ambient deposition conditions in the CVD or ALD reactor. The solid precursor can be

dissolved in organic solvents, and liquid delivery can be used to meter the solution into a vaporizer for transport to the reactor.

[0026] More specifically, and by way of example, the copper (I) amidinate precursor compositions of the present invention may be used during the formation of copper interconnect lines in semiconductor integrated circuitry, thin-film circuitry, thin-film packaging components and thin-film recording head coils. To form such integrated circuitry or thin-film circuitry, a semiconductor substrate may be utilized having a number of dielectric and conductive layers (multilayers) formed on and/or within the substrate. The semiconductor substrate may include a bare substrate or any number of constituent layers formed on a bare substrate.

[0027] In the broad practice of the present invention, a copper-containing layer may be formed on a semiconductor substrate using the copper (I) amidinate precursor, for use in a first, second, third, or more metallization layer. Such copper layers typically are used in circuit locations requiring low resistivity, high performance and/or high speed circuit paths. As discussed in the background section hereof, a barrier layer may be deposited or otherwise formed on the substrate before a copper layer is formed on a semiconductor substrate.

[0028] Using the copper precursor compositions described herein, copper may then be deposited on the wafer using a CVD or ALD system, such systems being well known in the semiconductor fabrication art. Further, water, water-generating compounds, or other adjuvants to the precursor formulation may be mixed with the copper precursor upstream of, or within, the CVD or ALD tool. Similarly, reducing agents may be utilized in an analogous fashion.

[0029] As a further variation, when copper alloy compositions are to be deposited on the substrate, the copper precursor formulation may contain or be mixed with other

metal source reagent materials, or such other reagent materials may be separately

vaporized and introduced to the deposition chamber.

[0030] The compositions of the present invention may be delivered to a CVD or ALD reactor in a variety of ways. For example, a liquid delivery system may be utilized. Alternatively, a combined liquid delivery and flash vaporization process unit may be employed, such as the LDS300 liquid delivery and vaporizer unit (commercially available from Advanced Technology Materials, Inc., Danbury, CT), to enable low volatility materials to be volumetrically delivered, leading to reproducible transport and deposition without thermal decomposition of the precursor. Both of these considerations of reproducible transport and deposition without thermal decomposition are essential for providing a commercially acceptable copper CVD or ALD process.

[0031] In liquid delivery formulations, copper precursors that are liquids may be used in neat liquid form, or liquid or solid copper precursors may be employed in solvent formulations containing same. Thus, copper precursor formulations of the invention may include solvent component(s) of suitable character as may be desirable and advantageous in a given end use application to form copper on a substrate. Suitable solvents may for example include alkane solvents, e.g., hexane, heptane, octane, pentane, or aryl solvents such as benzene or toluene, amines and amides. The utility of specific solvent compositions for particular copper precursors may be readily empirically determined, to select an appropriate single component or multiple component solvent medium for the liquid delivery vaporization and transport of the specific copper precursor employed.

[0032] In another embodiment of the invention, a solid delivery system may be utilized, for example, using the ProE-Vap solid delivery and vaporizer unit (commercially available from Advanced Technology Materials, Inc., Danbury, CT).

FIG. 1 is a schematic diagram of the apparatus of the present invention.

[0033] A wide variety of CVD or ALD process conditions may be utilized with the precursor compositions of the present invention. Generalized process conditions may include substrate temperature ranges of 150 - 400°C; pressure ranges of 0.05 – 5 Torr; and carrier gas flows of helium, hydrogen, nitrogen, or argon at 25 –750 sccm at a temperature approximately the same as the vaporizer of 50 to 120°C.

[0034] The deposition of copper thin films with useful electrical properties (low resistivity) and good adhesion to the barrier layer (e.g., formed of TiN or TaN), are also achieved by the process and precursors of the present invention. The conformality of the deposited film is practically achievable through CVD or ALD techniques that preferably provide a pathway to the achievement of “full-fill” copper metallization. The liquid delivery approach of the present invention, including “flash” vaporization and the use of copper precursor chemistry as herein disclosed, enable next-generation device geometries and dimensions to be attained, e.g., a conformal vertical interconnect of 65 nanometer linewidths. The conformal deposition of interconnects of these critical dimensions cannot be realized by currently available physical deposition methods. Thus, the approach of the present invention affords a viable pathway to future generation devices, and embodies a substantial advance in the art.

[0035] The features and advantages of the invention are more fully shown by the following illustrative and non-limiting examples.

[0036] Example 1 Synthesis of copper (I) 2-isopropyl-1,3-diisopropylamidinate

[0037] The reaction was carried out under a steady flow of nitrogen. A Schlenk flask was charged with 6.3 g of 1,3-diisopropylcarbodiimide ((CH₃)₂CHN=C=NCH(CH₃), 49.9 mmol) and 50 mL dry ether and placed in an ice bath. Then, 32 mL of isopropyllithium (1.6M in ether, 51.2 mmol) was added dropwise to the magnetically stirred mixture at about 0°C. After the addition was complete, the

mixture was stirred at room temperature for two additional hours. The mixture was transferred to another flask containing 6 g of CuCl (60.6 mmol) suspended in 50 mL ether. This mixture was stirred at room temperature overnight and then stripped to dryness. The solid residue was extracted with pentane (3 × 50 mL). After extraction, the pentane filtrate was concentrated to slightly cloudy. The saturated solution was placed in a freezer at -39°C, and crystalline product was obtained in a yield of about 60%.

[0038] Figure 1 shows the ¹H NMR (C₆D₆) for copper (I) 2-isopropyl-1,3-diisopropylamidinate, having the following peaks: δ 1.20 (d, 6H, (CH₃)₂CH-C), 1.23 (br, 12H, (CH₃)₂CH-N), 3.20 (hept, 1H, CH), 3.45 (br, 1H, CH), 3.95 (br, 1H, CH).

[0039] Figure 2 shows the STA/DSC plot for copper (I) 2-isopropyl-1,3-diisopropylamidinate. The melting peak is about 160°C and the residue is about 19%.

[0040] Figure 3 is the ORTEP structure for copper (I) 2-isopropyl-1,3-diisopropylamidinate, showing the dimeric structure of the compound and 30% probability thermal ellipsoids.

[0041] Example 2 Synthesis of copper (I) 2-dimethylamino-1,3-diisopropylamidinate

[0042] Neat 1,3-diisopropylcarbodiimide (12.37 g, 98 mmol, 15.2 mL) was slowly added to a solution of LiNMe₂ (5 g, 98 mmol) in 125 mL of THF. Some heat generation was observed. The reaction mixture was stirred for 1 hour. Thereafter, 9.7 g of solid CuCl (98 mmol) was added to the reaction mixture in a dry box. The resulting greenish suspension was stirred overnight and all volatiles were removed in vacuum. The residue was washed in 150 mL of hexane. Filtrate was concentrated in vacuum and placed in a refrigerator whereby neat crystals grew overnight. The overall yield was 60% and the melting point of the crystals was 108°C. ¹H NMR (C₆D₆): δ

3.42 (septet, 1H, $J(\text{H-H}) = 6 \text{ Hz}$, $\text{CH}(\text{CH}_3)_2$), 2.55 (singlet, 3H, $\text{N}(\text{CH}_3)_2$), 1.30 (doublet, 6H, $J(\text{H-H}) = 6 \text{ Hz}$, $\text{CH}(\text{CH}_3)_2$). ^{13}C NMR (C_6D_6): δ 171.95 ($\text{Me}_2\text{NC}(\text{N}(\text{iPr}))_2$), 48.61 ($\text{CH}(\text{CH}_3)_2$), 41.29 ($\text{N}(\text{CH}_3)_2$), 27.98 ($\text{CH}(\text{CH}_3)_2$).

[0043] Figure 4 shows the STA/DSC plot for copper (I) 2-dimethylamino-1,3-diisopropylamidinate, which is volatile with the transport temperature below 230°C, and having a residual mass below 5%.


[0044] Figure 5 is the ORTEP structure for copper (I) 2-dimethylamino-1,3-diisopropylamidinate, showing the dimeric structure of the compound in the solid state. A relatively short Cu-Cu distance of 2.4152(17) Å may indicate a weak metal-metal interaction. The average Cu-N distance is 1.875(3) Å, which is quite similar to that observed in analogous compounds.

[0045] While the invention has been described herein with reference to various specific embodiments, it will be appreciated that the invention is not thus limited, and extends to and encompasses various other modifications and embodiments, as will be appreciated by those ordinarily skilled in the art. Accordingly, the invention is intended to be broadly construed and interpreted, in accordance with the ensuing claims.

THE CLAIMS

What is claimed is:

1. A method of depositing copper on a tantalum or tantalum-containing layer, said method comprising forming a vapor of a copper precursor of the formula:

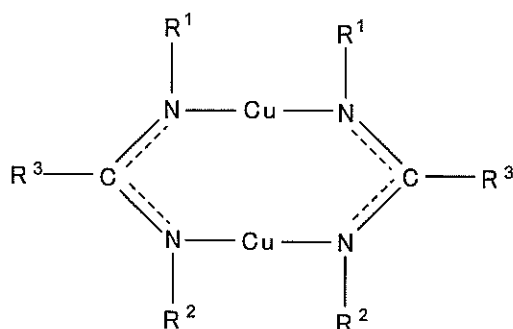

wherein:

R^1 and R^2 may be the same as or different from one another and each is independently selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

R^3 is selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and is independently selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

and

contacting the copper precursor vapor with the tantalum or tantalum-containing layer to deposit copper on said layer.

2. The method of claim 1, wherein said copper precursor vapor is at temperature in a range of from 50°C to 120°C .


3. The method of claim 2, wherein said tantalum or tantalum-containing layer is at temperature in a range of from 150°C to 400°C.
4. The method of claim 2, wherein the copper precursor vapor is at a pressure in a range of from 0.05 to 5 torr.
5. The method of claim 2, wherein the copper precursor vapor is carried to the tantalum or tantalum-containing layer in a carrier gas for said contacting.
6. The method of claim 5, wherein the carrier gas has a flow rate of from 25 to 750 standard cubic centimeters per minute.
7. The method of claim 6, wherein the carrier gas comprises at least one gas selected from the group consisting of helium, hydrogen, nitrogen and argon.
8. The method of claim 1, wherein said forming the copper precursor vapor comprises liquid delivery flash vaporization of the copper precursor.
9. The method of claim 8, wherein said liquid delivery flash vaporization comprises delivery of said copper precursor in a liquid medium comprising at least one solvent.
10. The method of claim 9, wherein the liquid medium comprises a solvent selected from the group consisting of hexane, heptane, octane, pentane, benzene, toluene, and dimethylformamide.
11. The method of claim 1, wherein the copper precursor is selected from the group consisting of copper (I) 2-isopropyl-1,3-diisopropylamidinate and copper (I) 2-dimethylamine-1,3-diisopropylamidinate.

12. The method of claim 11, wherein the copper precursor is copper (I) 2-dimethylamine-1,3-diisopropylamidinate.

13. The method of claim 1, wherein: said copper precursor vapor is at temperature in a range of from 50°C to 120°C; said tantalum or tantalum-containing layer is at temperature in a range of from 150°C to 400°C; the copper precursor is selected from the group consisting of copper (I) 2-isopropyl-1,3-diisopropylamidinate and copper (I) 2-dimethylamine-1,3-diisopropylamidinate; the copper precursor vapor is at a pressure in a range of from 0.05 to 5 torr; said forming the copper precursor vapor comprises liquid delivery flash vaporization of the copper precursor; and the liquid in said liquid delivery flash vaporization comprises a solvent selected from the group consisting of alkanes, aryls, amines, amides, hexane, heptane, octane, pentane, benzene, toluene, and dimethylformamide.

14. The method of claim 13, wherein said contacting comprises chemical vapor deposition or atomic layer deposition.

15. A precursor vapor comprising vapor of a copper precursor of the formula:

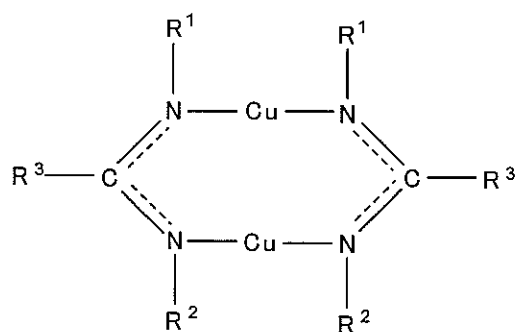


wherein:

R¹ and R² may be the same as or different from one another and each is independently selected from the group consisting of H, C₁-C₆ alkyl, C₃-C₇ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

R^3 is selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups; and water vapor or vapor of a water-generating compound.

16. The precursor vapor of claim 15, comprising vapor of a copper precursor selected from the group consisting of copper (I) 2-isopropyl-1,3-diisopropylamidinate and copper (I) 2-dimethylamine-1,3-diisopropylamidinate.

17. A solid delivery and vaporizer system for supplying copper precursor vapor for vapor deposition of copper, said system comprising a vessel containing said copper precursor and adapted for delivery from the vessel of copper precursor vapor deriving from the solid copper precursor in the vessel, said solid copper precursor comprising a copper precursor of the formula

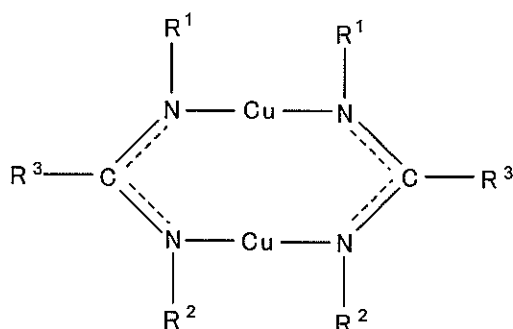

wherein:

R^1 and R^2 may be the same as or different from one another and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;


R^3 is selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups.

18. The solid delivery and vaporizer system of claim 17, wherein the copper precursor is selected from the group consisting of copper (I) 2-isopropyl-1,3-diisopropylamidinate and copper (I) 2-dimethylamine-1,3-diisopropylamidinate.

19. The solid delivery and vaporizer system of claim 17, wherein the copper precursor comprises copper (I) 2-dimethylamine-1,3-diisopropylamidinate.

20. The method of claim 1, wherein the contacting comprises copper metallization utilizing liquid delivery flash vaporization of the copper precursor and chemical vapor deposition or atomic layer deposition.


21. A copper precursor compound of the formula:

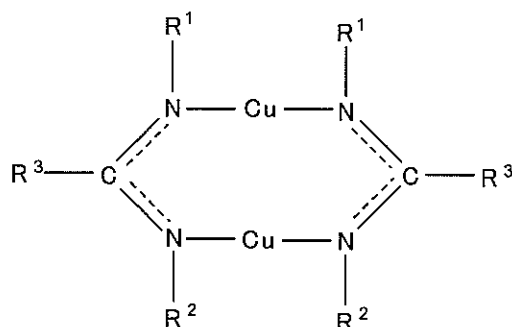

Wherein:

R¹ and R² may be the same as or different from one another and each is independently selected from H and C₃-C₇ cycloalkyl, and each R³ may be the same as or different from the other, and is independently selected from the group consisting of H, C₁-C₆ alkyl, C₃-C₇ cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR⁴R⁵, where R⁴ and R⁵ may be the same as or different from one another and each is independently selected from the group consisting of H, C₁-C₆ alkyl, C₃-C₇ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups.

22. A copper precursor compound of the formula:

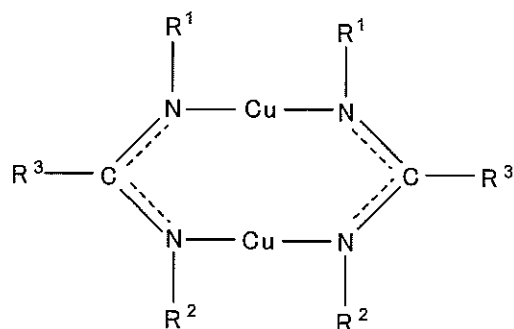

wherein:


each of R^1 and R^2 may be the same as or different from the others and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, and hydrocarbyl derivatives of silyl groups; and

each R^3 may be the same as or different from the other and each is independently selected from the group consisting of C_3 - C_7 cycloalkyl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, and hydrocarbyl derivatives of silyl groups;

with the proviso that when R^1 and R^2 are isopropyl groups, R^3 is not a methyl group, and with the proviso that when R^3 is H, R^1 and $R^2 \neq$ propyl or butyl.

23. A solid delivery system for use in depositing copper, said system comprising a solid delivery and vaporizer unit, and a solid delivery copper source material in said solid delivery and vaporizing unit, said copper source material comprising a compound selected from the group consisting of:

(a) compounds of the formula

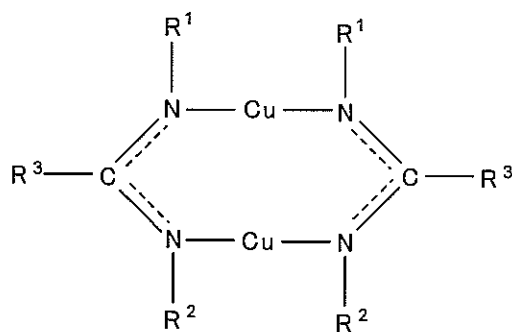


wherein:

each of R^1 and R^2 may be the same as or different from the others and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

each R^3 may be the same as or different from the other and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;


(b) compounds of the formula

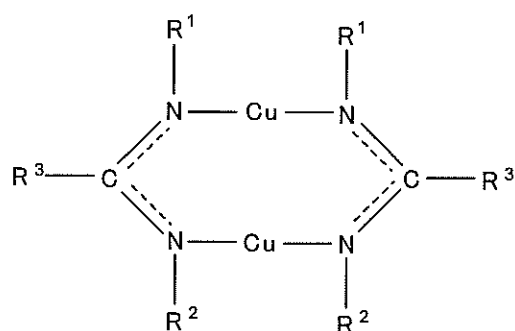

wherein:

each of R^1 and R^2 may be the same as or different from the others and each is independently selected from H and C_3 - C_7 cycloalkyl, and each R^3 may be the same as or different from the other and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups; and

(c) compounds of the formula

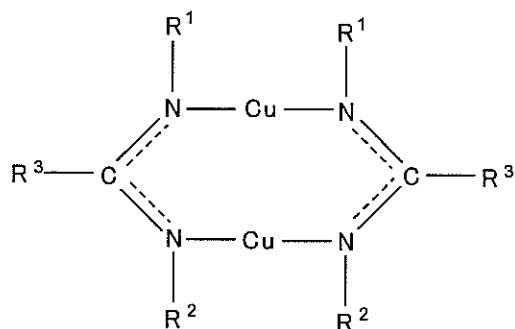

wherein:


each of R^1 and R^2 may be the same as or different from the others and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

each R^3 may be the same as or different from the others and each is independently selected from the group consisting of C_3 - C_7 cycloalkyl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

with the proviso that when R^1 and R^2 are isopropyl groups, R^3 is not a methyl group.

24. A solid delivery process for depositing copper, said process comprising vaporizing a solid source material to generate a copper precursor vapor, and depositing copper from said copper precursor vapor on a substrate, wherein said copper precursor vapor comprises vapor of a copper precursor selected from the group consisting of:

(a) compounds of the formula

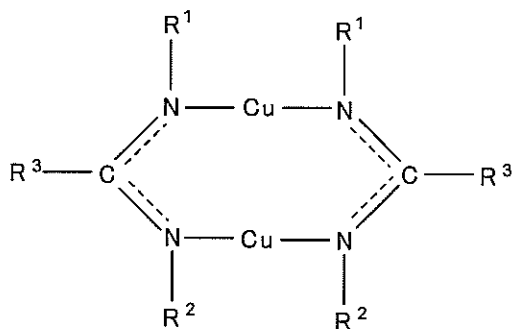


wherein:

each of R^1 and R^2 may be the same as or different from the others and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

each R^3 may be the same as or different from the other and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;


(b) compounds of the formula

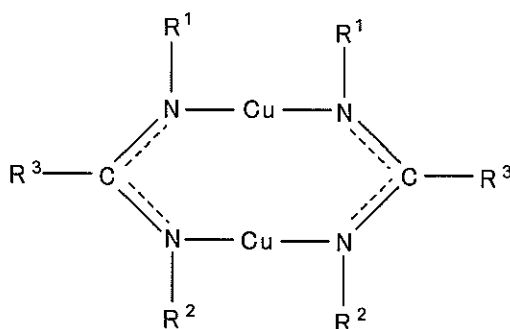

wherein:

each of R^1 and R^2 may be the same as or different from the others and each is independently selected from H and C_3 - C_7 cycloalkyl, and each R^3 may be the same as or different from the other and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and each is independently selected from the group consisting of H, C_1 - C_6 alkyl, C_3 - C_7 cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups; and

(c) compounds of the formula

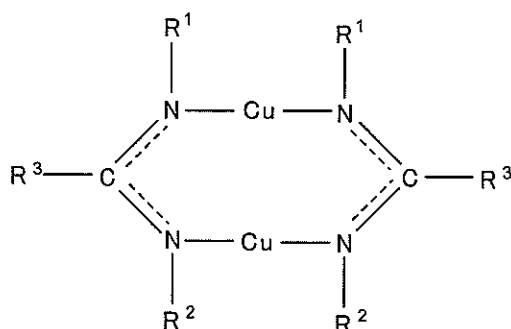


wherein:

each of R^1 and R^2 may be the same as or different from the others and each is independently selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

each R^3 may be the same as or different from the others and each is independently selected from the group consisting of $\text{C}_3\text{-C}_7$ cycloalkyl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and each is independently selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

with the proviso that when R^1 and R^2 are isopropyl groups, R^3 is not a methyl group.

25. A composition comprising copper (I) 2-isopropyl-1,3-diisopropylamidinate in an organic solvent medium.
26. The composition of claim 25, wherein said solvent medium comprises toluene.
27. A composition comprising copper (I) 2-dimethylamine-1,3-diisopropylamidinate in an organic solvent medium.
28. The composition of claim 27, wherein said solvent medium comprises toluene.
29. A copper precursor compound of the formula:



wherein:


R¹ and R² may be the same as or different from one another and each is independently selected from C₁-C₆ alkyl; R³ is NR⁴R⁵, where R⁴ and R⁵ may be the same as or different from one another and is independently selected from C₁-C₆ alkyl.

30. The method of claim 9, wherein said at least one solvent is selected from the group consisting of alkane, aryl, amine and amide solvents.

31. The method of claim 20, wherein said copper metallization comprises full fill copper metallization.

32. A copper precursor composition, comprising:

(i) a copper precursor having the formula:

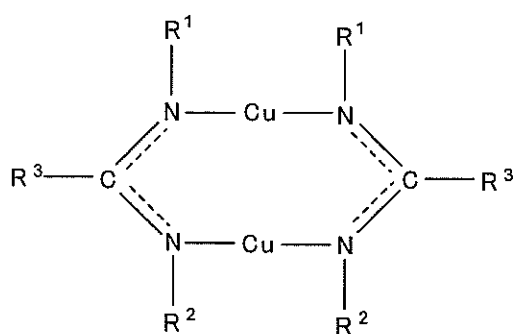

wherein:

R¹ and R² may be the same as or different from one another and each is independently selected from the group consisting of H, C₁-C₆ alkyl, C₃-C₇ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

R³ is selected from the group consisting of H, C₁-C₆ alkyl, C₃-C₇ cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR⁴R⁵, where R⁴ and R⁵ may be the same as or different from one another and is independently selected from the group consisting of H, C₁-C₆ alkyl, C₃-C₇ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups; and

(ii) an adjuvant selected from the group consisting of water, water-generating compounds, reducing agents, and combinations thereof.

33. The copper precursor composition of claim 32, wherein the copper precursor is selected from the group consisting of copper (I) 2-isopropyl-1,3-diisopropylamidinate and copper (I) 2-dimethylamine-1,3-diisopropylamidinate.

34. The copper precursor composition of claim 32, wherein the adjuvant is water.

35. The copper precursor composition of claim 32, wherein the adjuvant is a water-generating compound.


36. The copper precursor composition of claim 32, wherein the adjuvant is a reducing agent.

37. The copper precursor composition of claim 32, wherein the copper precursor is copper (I) 2-isopropyl-1,3-diisopropylamidinate.

38. The copper precursor composition of claim 32, wherein the copper precursor is copper (I) 2-dimethylamine-1,3-diisopropylamidinate.

39. A method of depositing copper on a substrate, comprising conducting a chemical vapor deposition process or an atomic layer deposition process involving contacting the substrate with a vapor of a copper precursor composition, wherein said copper precursor composition comprises:

(i) a copper precursor having the formula:

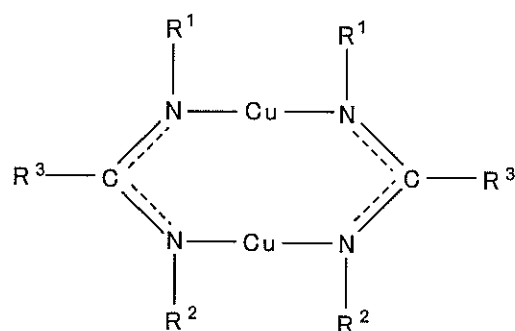

wherein:

R^1 and R^2 may be the same as or different from one another and each is independently selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups;

R^3 is selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, hydrocarbyl derivatives of silyl groups and NR^4R^5 , where R^4 and R^5 may be the same as or different from one another and is independently selected from the group consisting of H, $\text{C}_1\text{-C}_6$ alkyl, $\text{C}_3\text{-C}_7$ cycloalkyl, aryl, and hydrocarbyl derivatives of silyl groups; and

(ii) an adjuvant selected from the group consisting of water, water-generating compounds, reducing agents, and combinations thereof.

40. The method of claim 39, wherein the copper precursor is selected from the group consisting of copper (I) 2-isopropyl-1,3-diisopropylamidinate and copper (I) 2-dimethylamine-1,3-diisopropylamidinate.

41. The method of claim 39, wherein the adjuvant is water.
42. The method of claim 39, wherein the adjuvant is a water-generating compound.
43. The method of claim 39, wherein the adjuvant is a reducing agent.
44. The method of claim 39, wherein the copper precursor is copper (I) 2-isopropyl-1,3-diisopropylamidinate.
45. The method of claim 39, wherein the copper precursor is copper (I) 2-dimethylamine-1,3-diisopropylamidinate.
46. The method of claim 39, wherein the substrate comprises a semiconductor substrate.
47. The method of claim 39, wherein the process is carried out to metalize an integrated circuit device structure on the substrate.
48. The method of claim 39, wherein the process comprises chemical vapor deposition.
49. The method of claim 39, wherein the process comprises atomic layer deposition.
50. The method of claim 39, wherein the process is carried out at temperature in a range of from 150 to 400°C and pressure in a range of from 0.05 to 5 torr.

51. The method of claim 39, wherein the vapor of the copper precursor composition is delivered to the substrate in a carrier gas comprising a gas selected from among helium, hydrogen, nitrogen and argon.