




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B65B 53/06	A1	(11) International Publication Number: WO 98/24693 (43) International Publication Date: 11 June 1998 (11.06.98)
(21) International Application Number: ✓ PCT/EP97/06946 (22) International Filing Date: ✓ 28 November 1997 (28.11.97) (30) Priority Data: MI96U000787 ✓ 3 December 1996 (03.12.96) ✓ IT (71) Applicant (for all designated States except US): MINIPACK-TORRE S.P.A [IT/IT]; Via Provinciale, 54, I-24044 Dalmine (IT). ✓ (72) Inventor; and (75) Inventor/Applicant (for US only): TORRE, Francesco [IT/IT]; Via Baschenis, 3, I-24044 Dalmine (IT). ✓ (74) Agent: FARAGGIANA, Vittorio; Ingg. Guzzi e Ravizza s.r.l., Via V. Monti, 8, I-20123 Milano (IT).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: MACHINE FOR PACKAGING ARTICLES WITH HEAT-SHRINKABLE FILM ✓

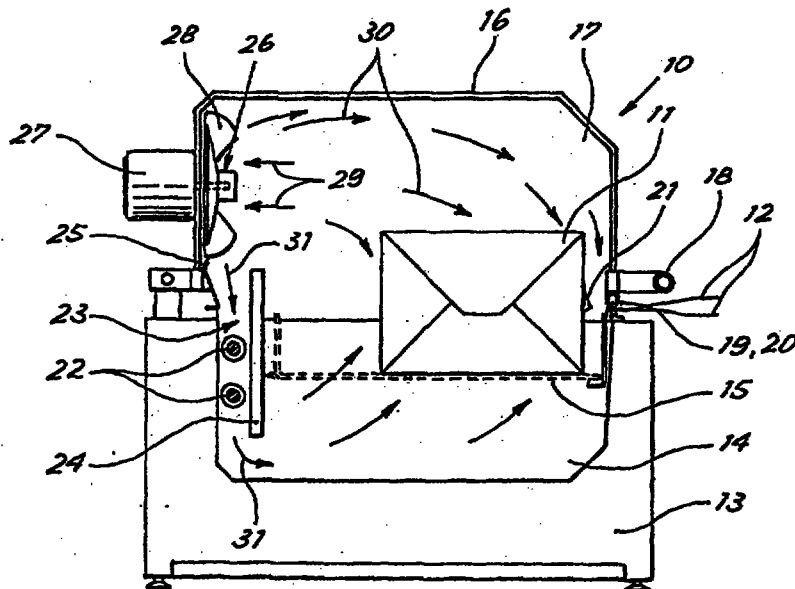

(57) Abstract

A machine for packaging products (11) with film (12) made of heat shrinkable material, comprises a body (13) containing a lower portion (14) of a shrinkage chamber which houses, wrapped in film (12), a product (11) to be packaged, and a cover (16), hinged to said body (13) and defining an upper portion (17) of the shrinkage chamber. Disposed in the shrinkage chamber (14, 17) are a heating unit (22) and a ventilating unit (26, 27) to create air circulation (29, 30, 31) inside said chamber. The ventilating unit (26, 27) is situated above the heating unit (22) to generate, when in operation, at least a flow of air (31) through the heating unit (22) in the direction of the bottom of the shrinkage chamber (14, 17).