

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 June 2006 (29.06.2006)

PCT

(10) International Publication Number
WO 2006/068628 A1

(51) International Patent Classification:
E03D 1/14 (2006.01)

(74) Agent: PARAGON CONSULTANCY INC.; Koza Sokak
No: 60/6, GOP, 06700 Ankara (TR).

(21) International Application Number:
PCT/TR2004/000052

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
20 December 2004 (20.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US):
ECZACIBASI YAPI GERECLERI SANAYI VE
TICARET A.S. [TR/TR]; Yunus Tren Istasyonu Yani,
Kartal, 81412 Istanbul (TR).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ER, Osman**
[TR/TR]; Yunus Tren Istasyonu Yani, Kartal, 81412
Istanbul (TR). **YALCIN, Bengusu** [TR/TR]; Yunus Tren
Istasyonu Yani, Kartal, 81412 Istanbul (TR).

[Continued on next page]

(54) Title: DUAL VOLUME FLUSH SYSTEM

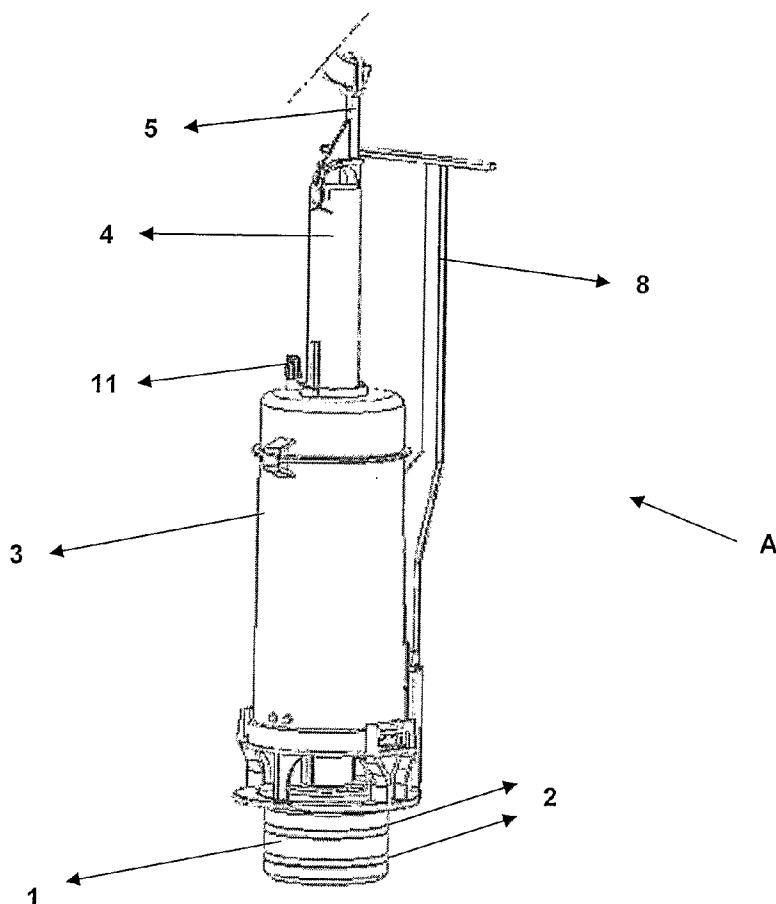

(57) Abstract: The subject matter invention, dual flush system (A) used in toilet reservoirs for large or small volume flush, is comprising the mechanical parts mentioned as, flush valve base (1), flush valve base sealing gasket (2), flush body (3), overflow tube (4), flush lift arm (5), flush valve base support (8), large volume floater (9), small volume floater (10), small volume adjustment rod (11), small volume pool floater (12), retaining ring (14), flush gasket (15), flange (16); and said system (A) is capable of performing a large volume flush when the overflow tube (4) is lifted completely upward, and a small volume flush when the overflow tube (4) is lifted at a shorter distance.

WO 2006/068628 A1

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *with amended claims*