

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 July 2003 (24.07.2003)

PCT

(10) International Publication Number
WO 03/059487 A1

(51) International Patent Classification⁷: **B01D 29/05**,
E02B 5/08

(21) International Application Number: PCT/US03/00563

(22) International Filing Date: 8 January 2003 (08.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/347,690 11 January 2002 (11.01.2002) US
10/256,418 27 September 2002 (27.09.2002) US

(71) Applicant: **HEADWORKS INC.** [US/US]; 11011 Richmond, Suite 900, Houston, TX 77042 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:
— with international search report

(72) Inventor: **SEIDL, Gerald**; 47 Bayou Pointe Drive, Houston, TX 77063 (US).

(74) Agents: **BROWN, Kimberly, L.** et al.; Bracewell & Patterson, L.L.P., P.O. Box 61389, Houston, TX 77802-1389 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REMOVABLE BAR FOR BAR SCREEN

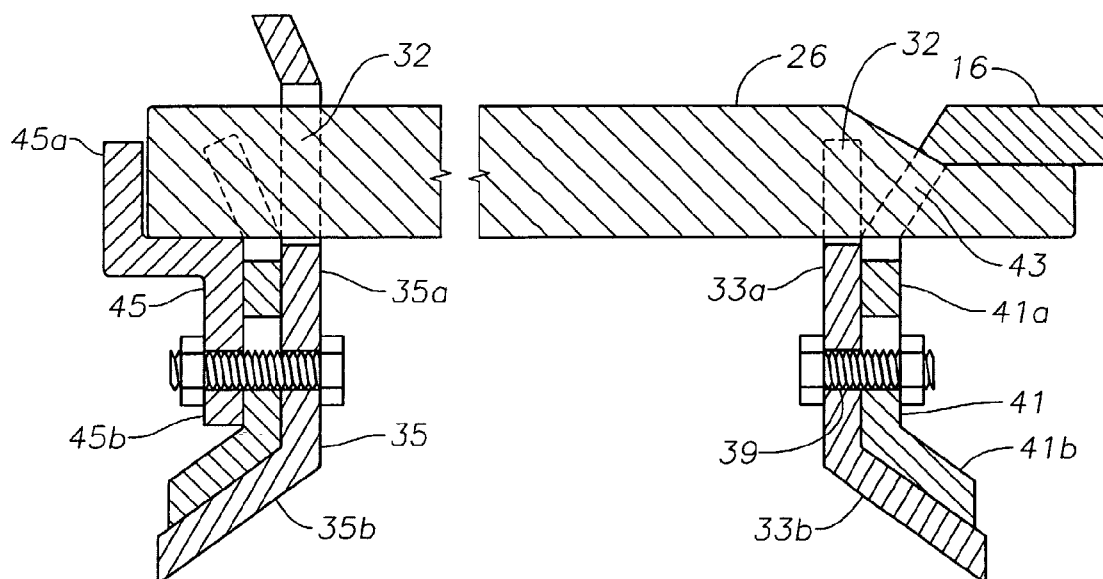

(57) Abstract: A bar screen system for fluid channels has individually removeable bars (26). The bars are connected to at least two screenfield bar holders (33, 35). Each holder has a plurality of slots (32) in which the bars insert. A removeably mounted screenfield bar retainer (41) at each holder attaches the bars. The retainers have teeth (43) that wedge the bars between them.



WO 03/059487 A1