

FIG. 1

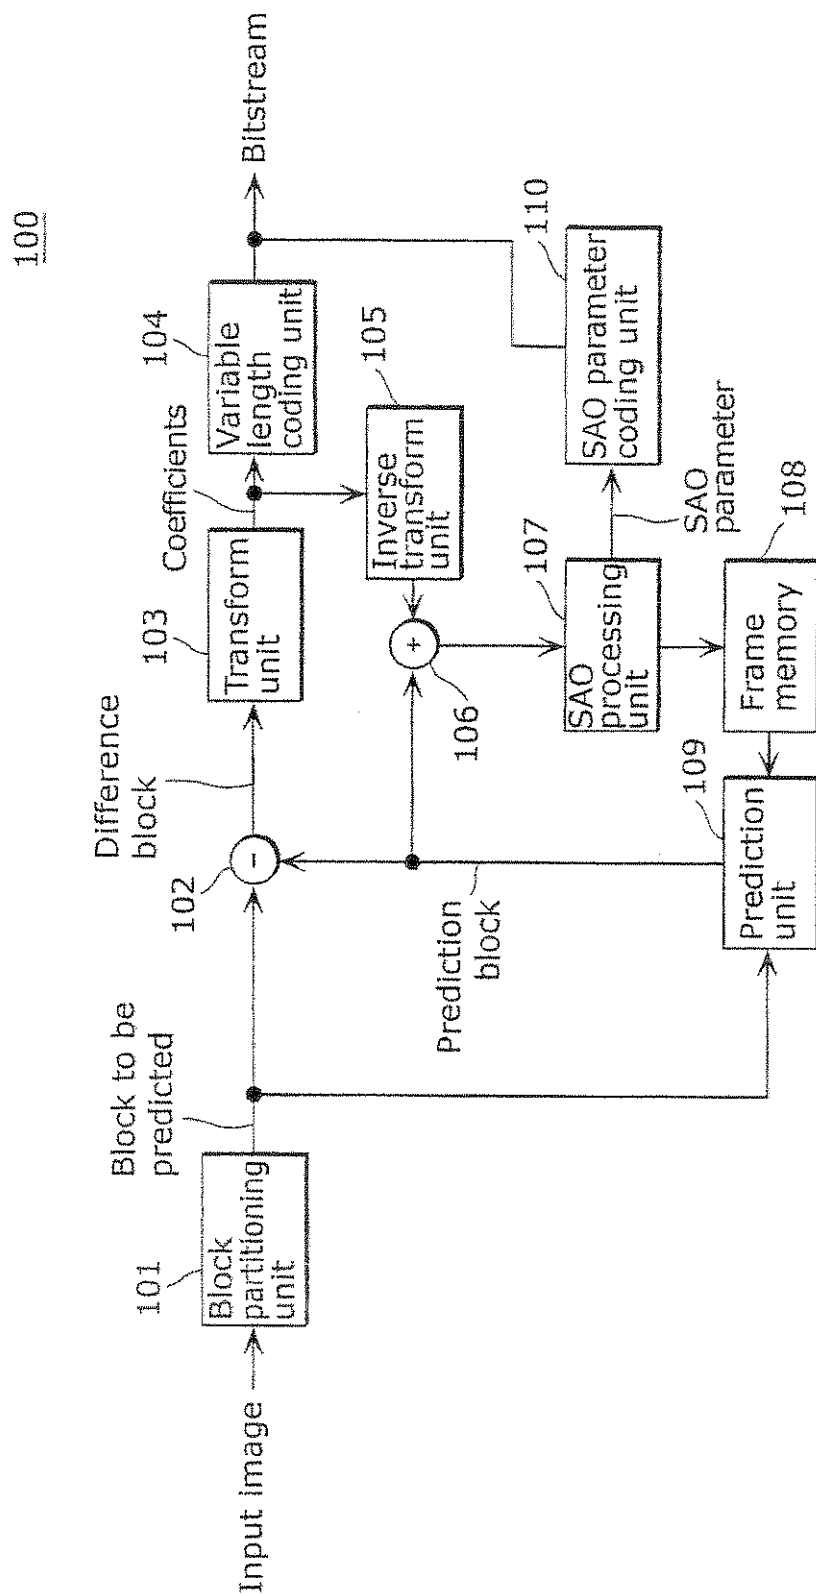


FIG. 2

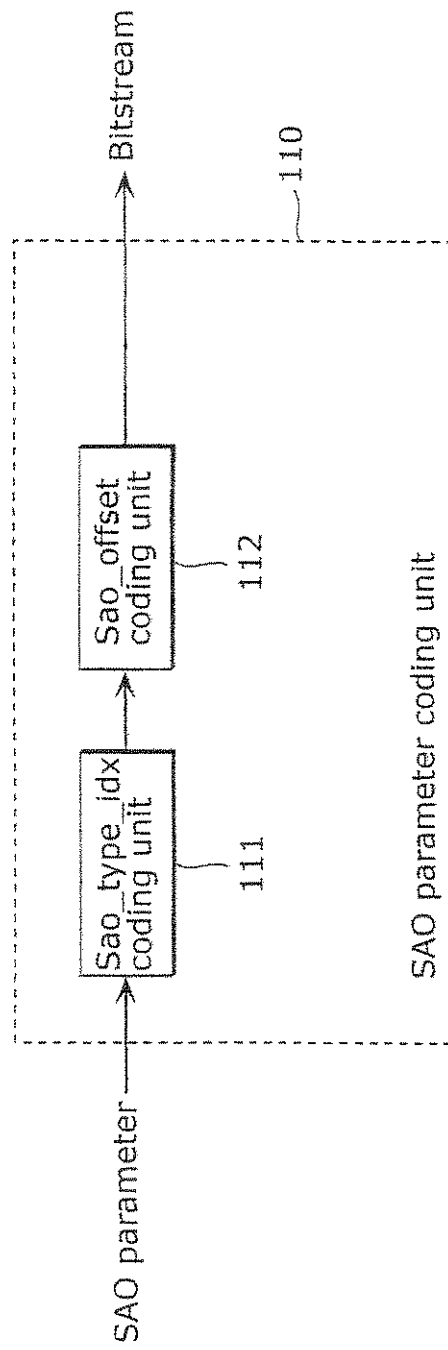


FIG. 3

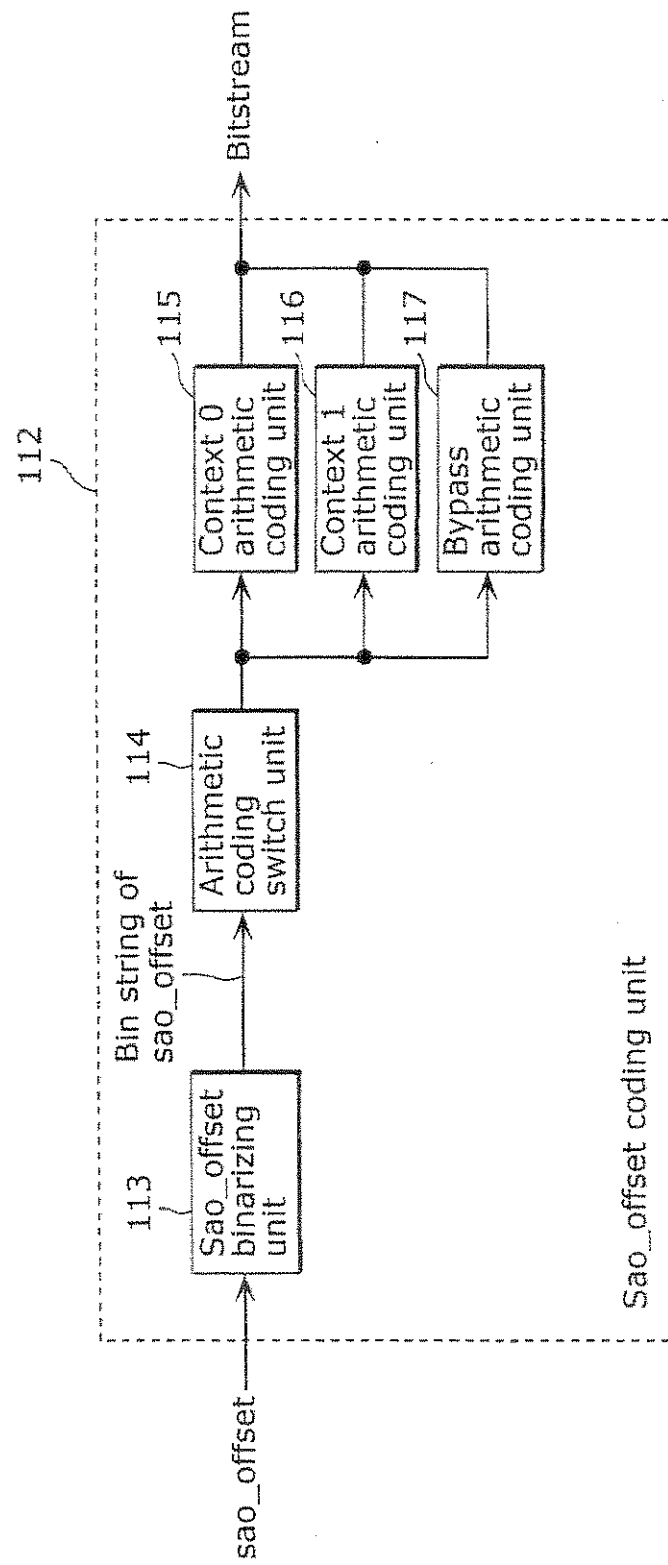


FIG. 4

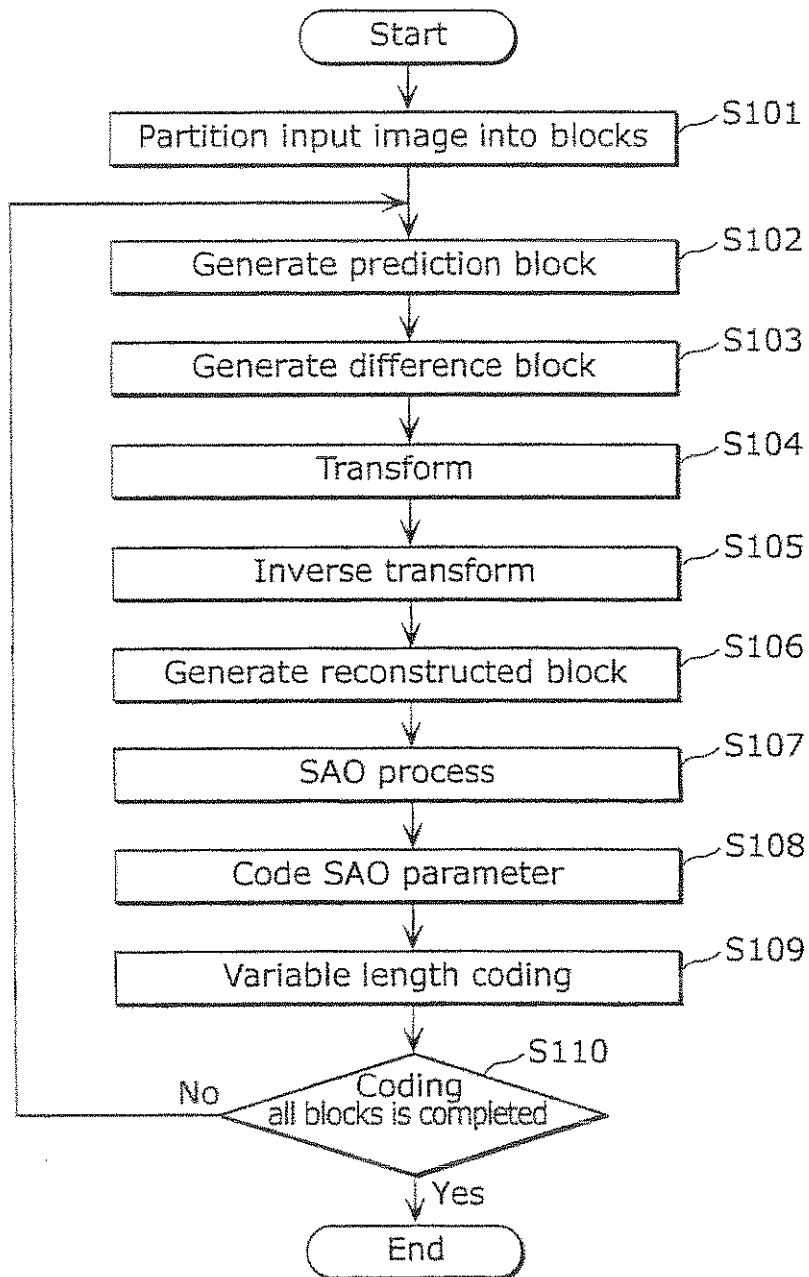


FIG. 5

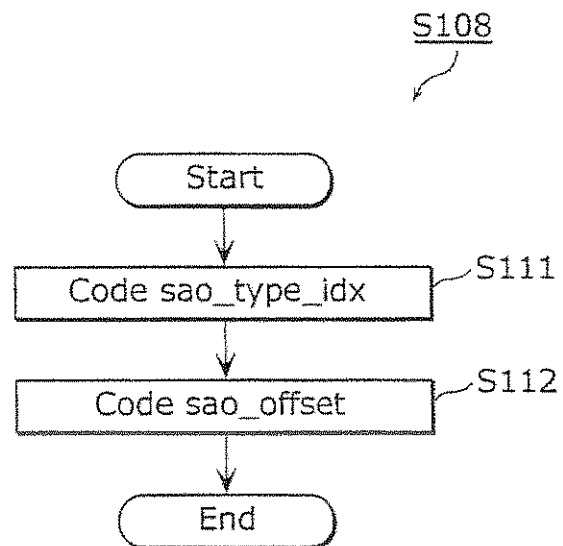


FIG. 6A

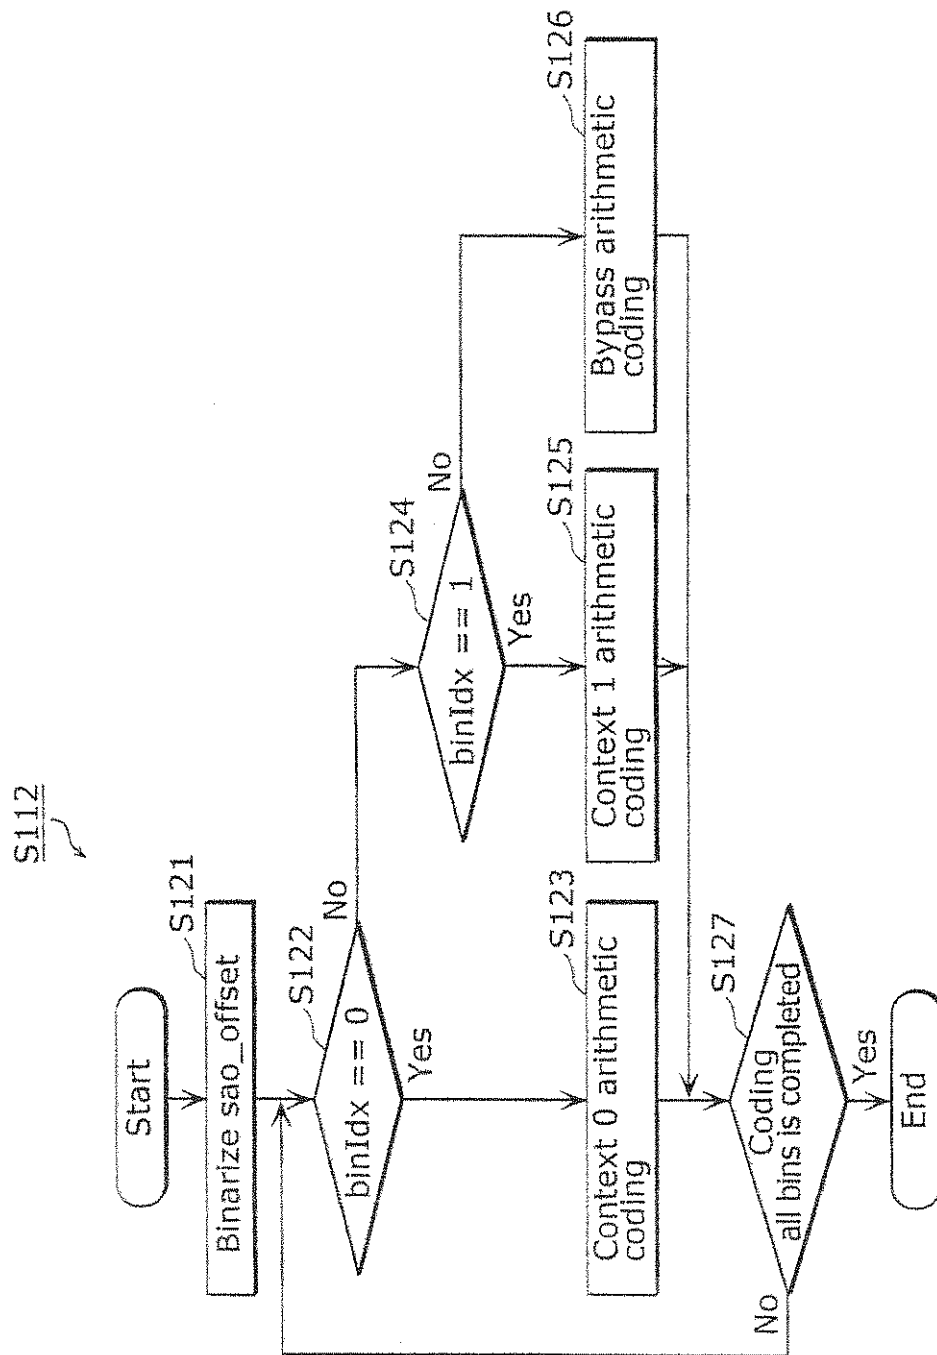


FIG. 6B

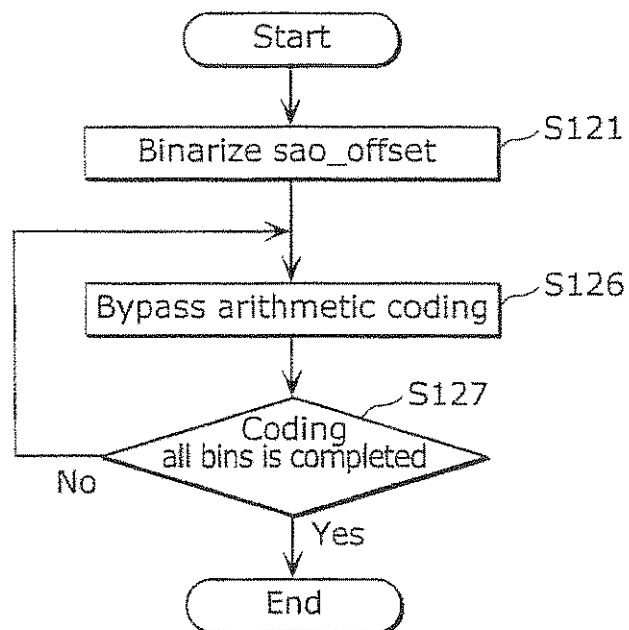


FIG. 7

Non-binary signal	Bin string							
	binIdx							
	0	1	2	3	4	5	6	
0	0							
1	1	0						
2	1	1	0					
3	1	1	1	0				
4	1	1	1	1	0			
5	1	1	1	1	1	0		
6	1	1	1	1	1	1	0	
7	1	1	1	1	1	1	1	1

FIG. 8

		binIdx						
		0	1	2	3	4	5	6
Embodiment 1	Context 0	Context 1		Bypass				
Change 1	Context 0	Bypass						
Change 2	Bypass							

FIG. 9

	Main			HE10		
	AI	RA	LB	AI	RA	LB
Embodiment 1	0.00	-0.01	0.02	0.01	0.05	0.04
Change 1	0.01	0.04	0.08	0.01	0.07	0.07
Change 2	0.03	0.04	0.07	0.01	0.06	0.07

FIG. 10

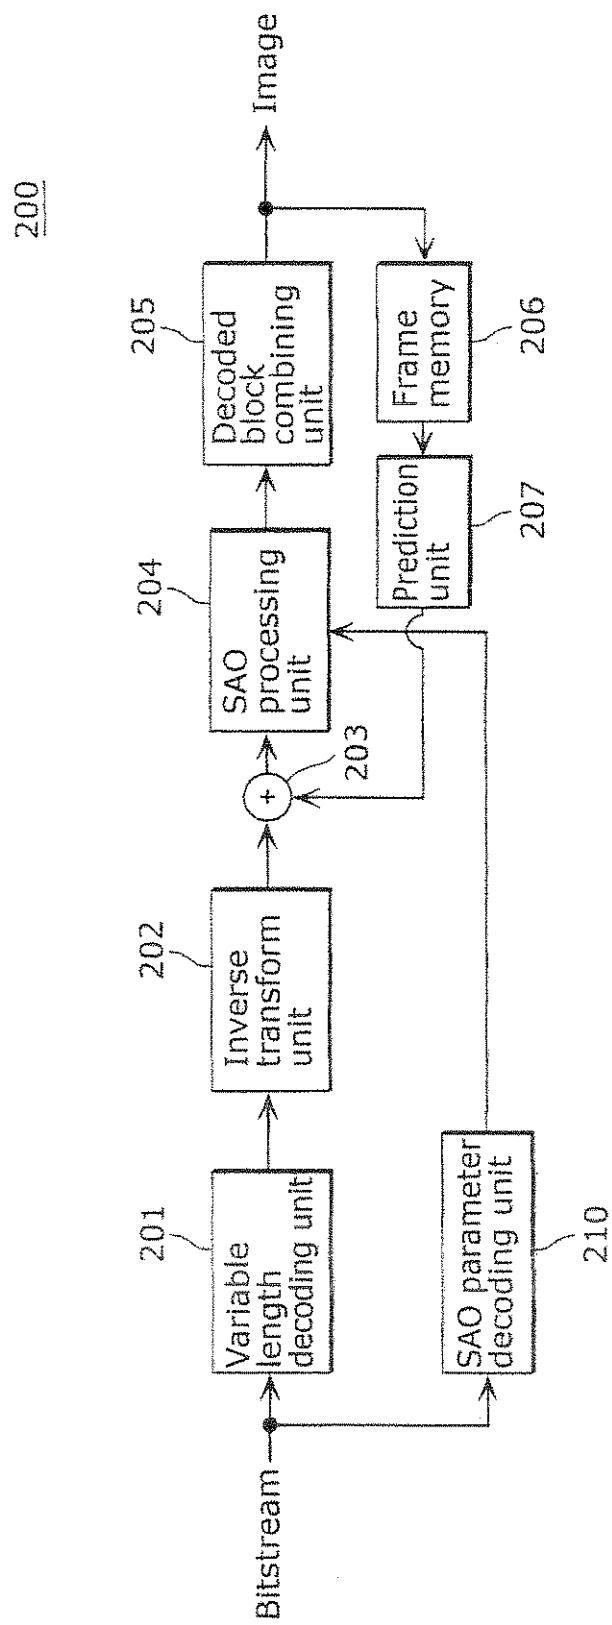


FIG. 11

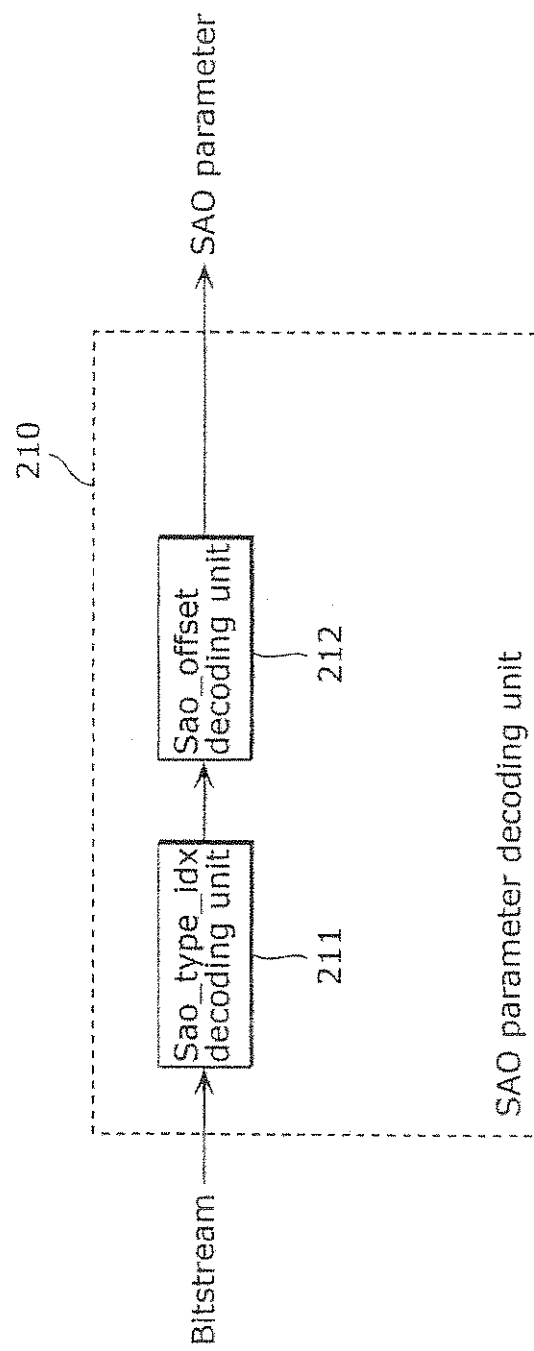


FIG. 12

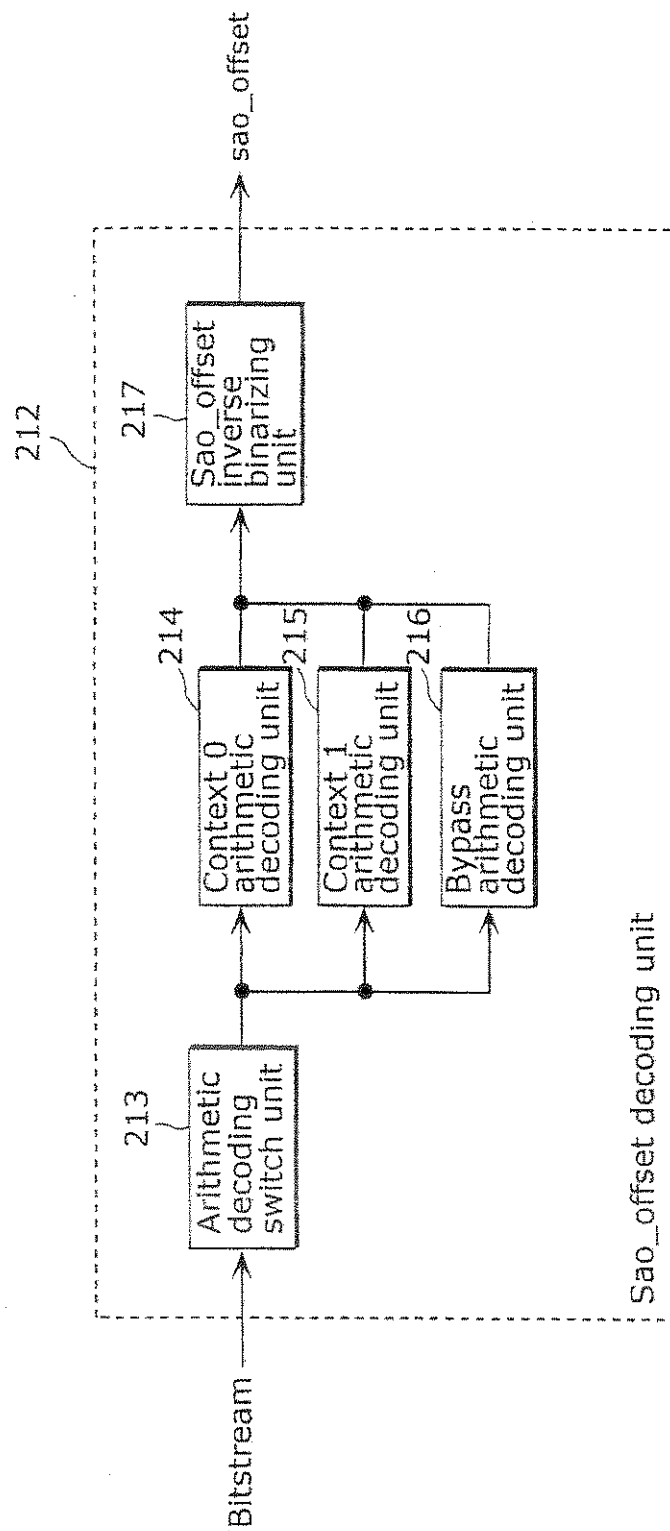


FIG. 13

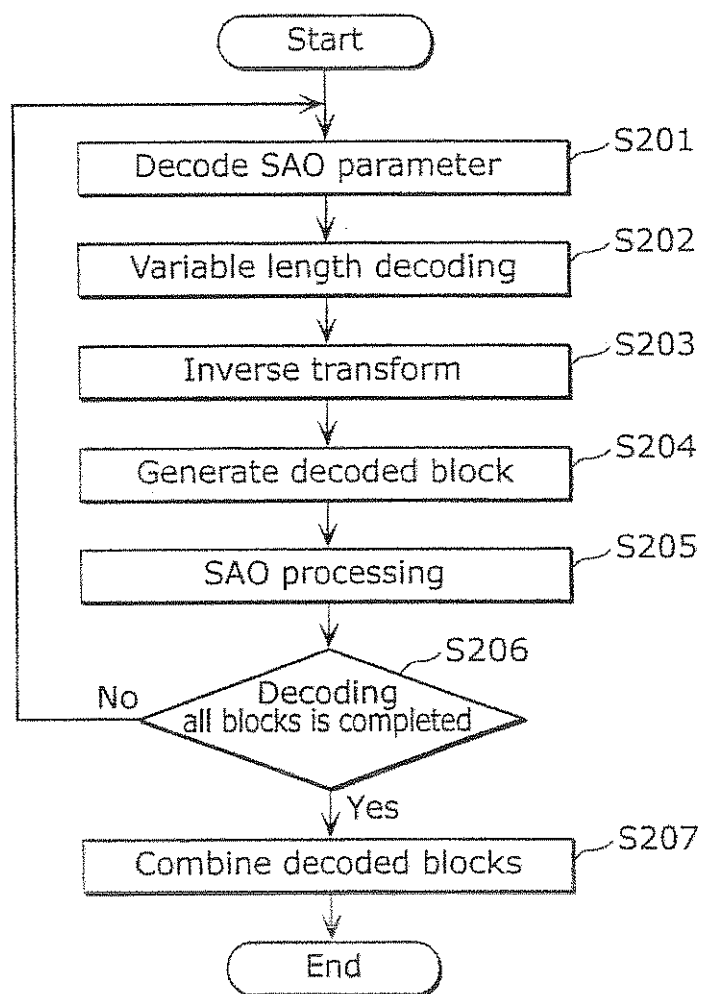


FIG. 14

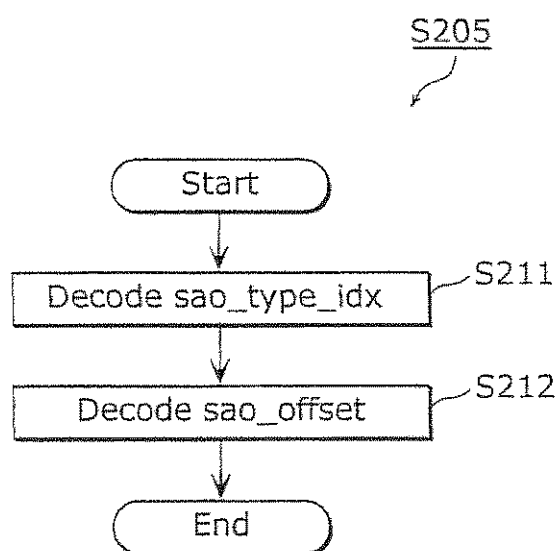


FIG. 15A

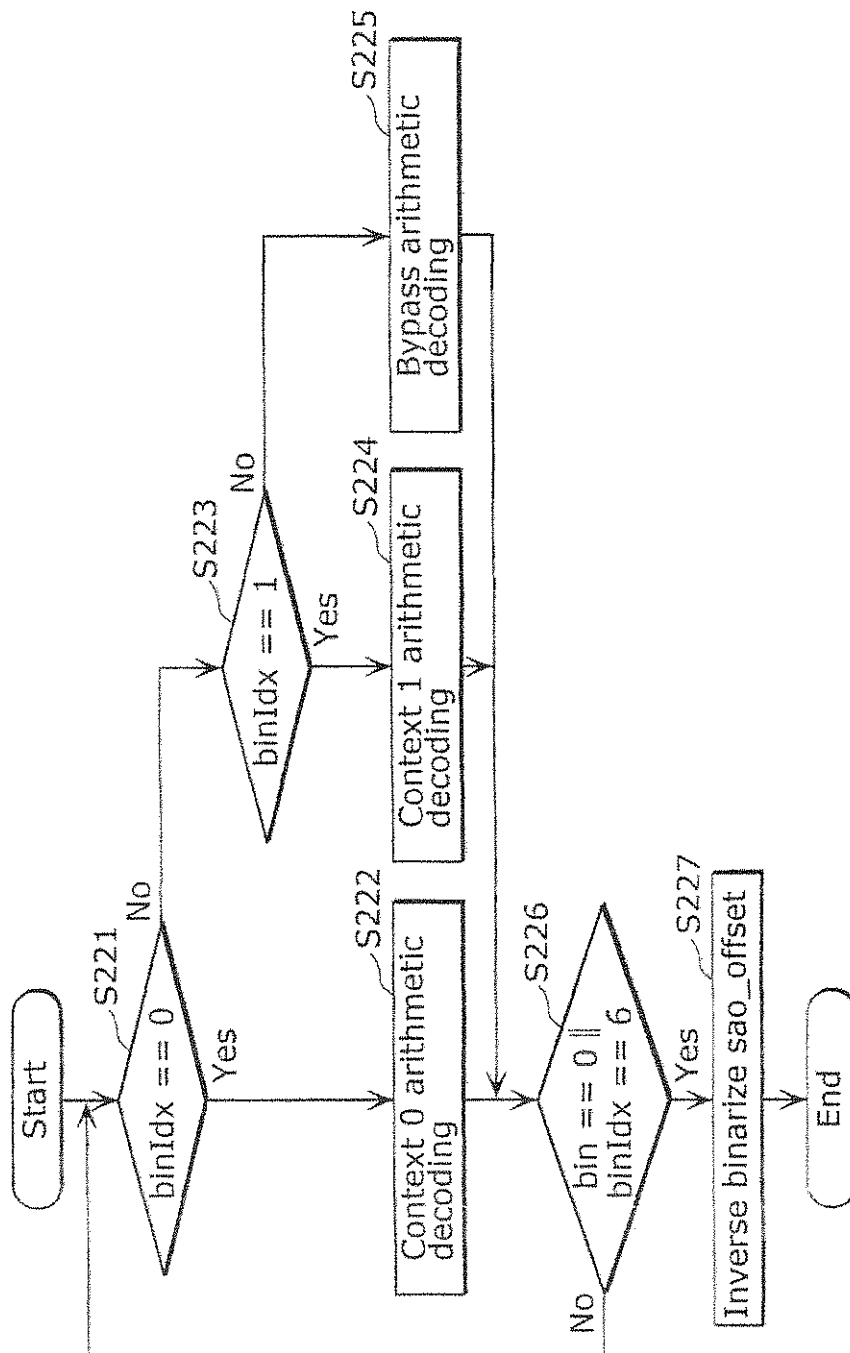


FIG. 15B

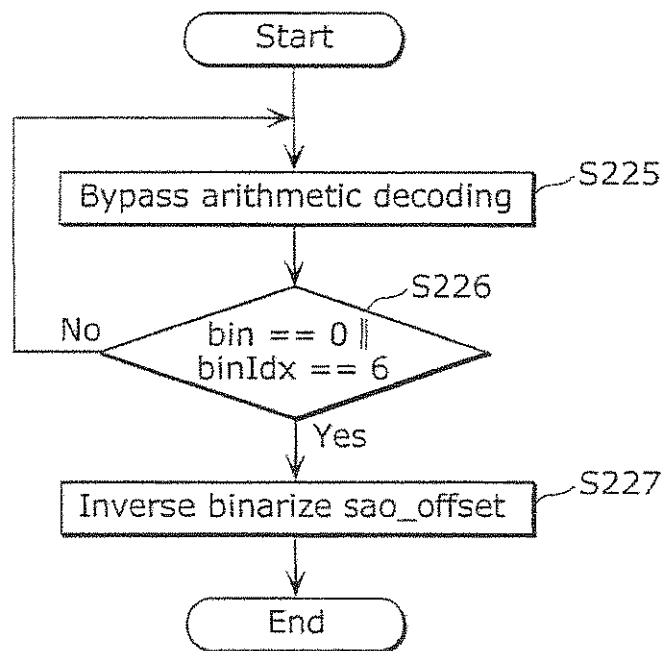


FIG. 16

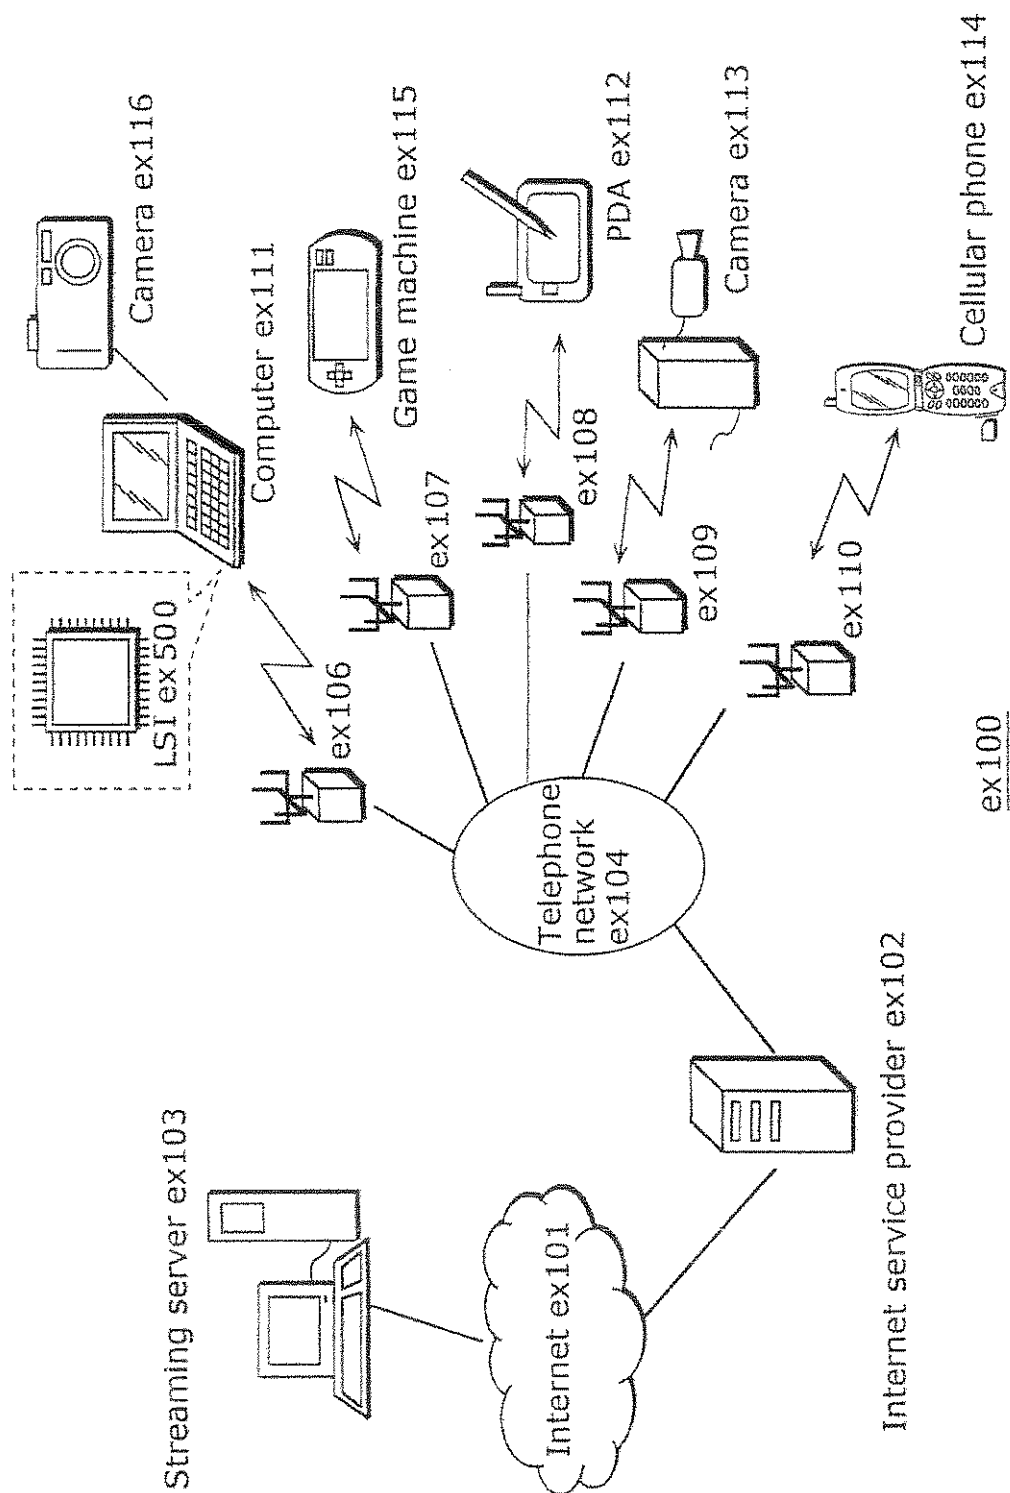


FIG. 17

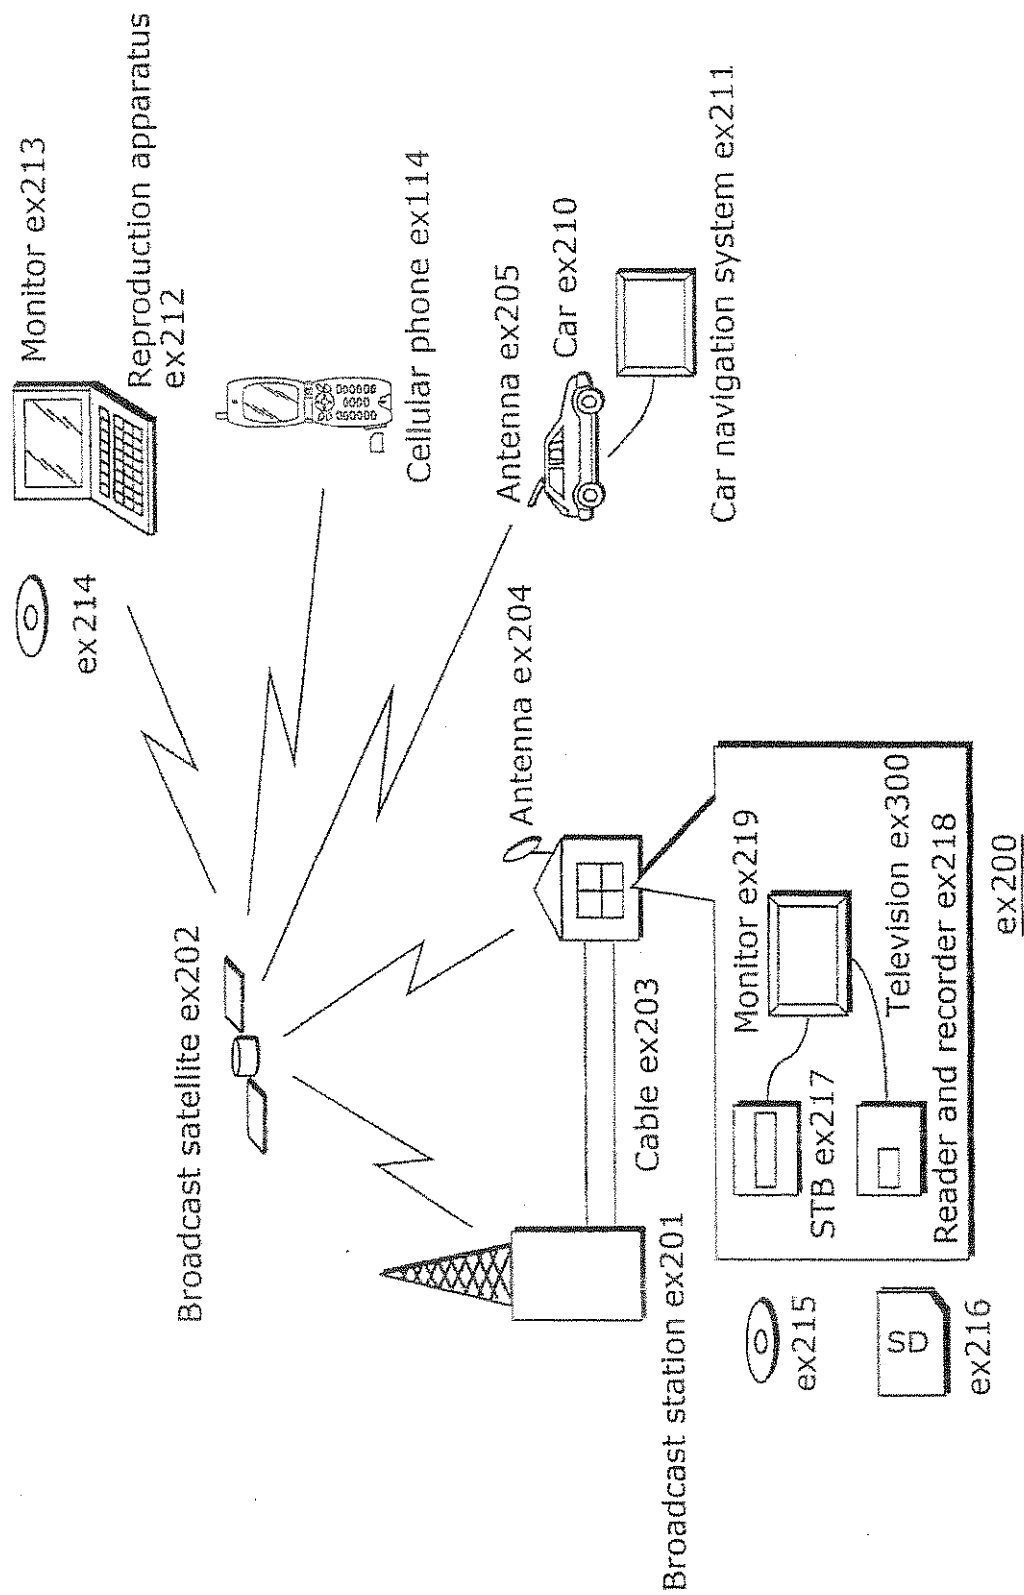


FIG. 18


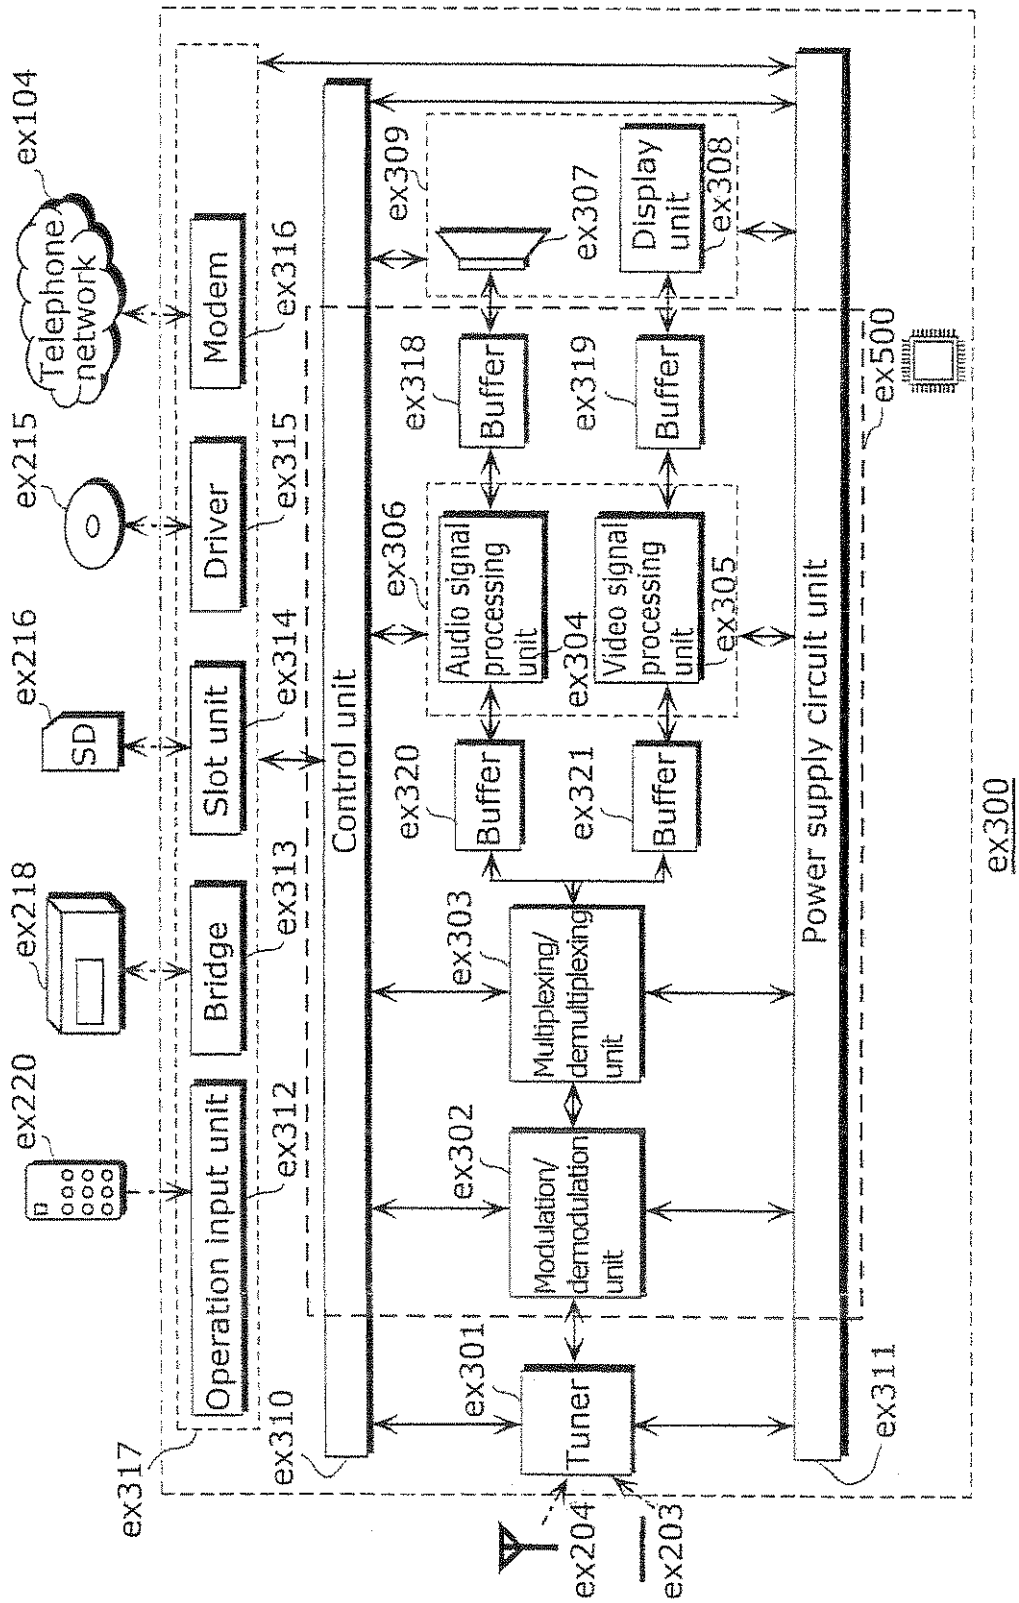


FIG. 19

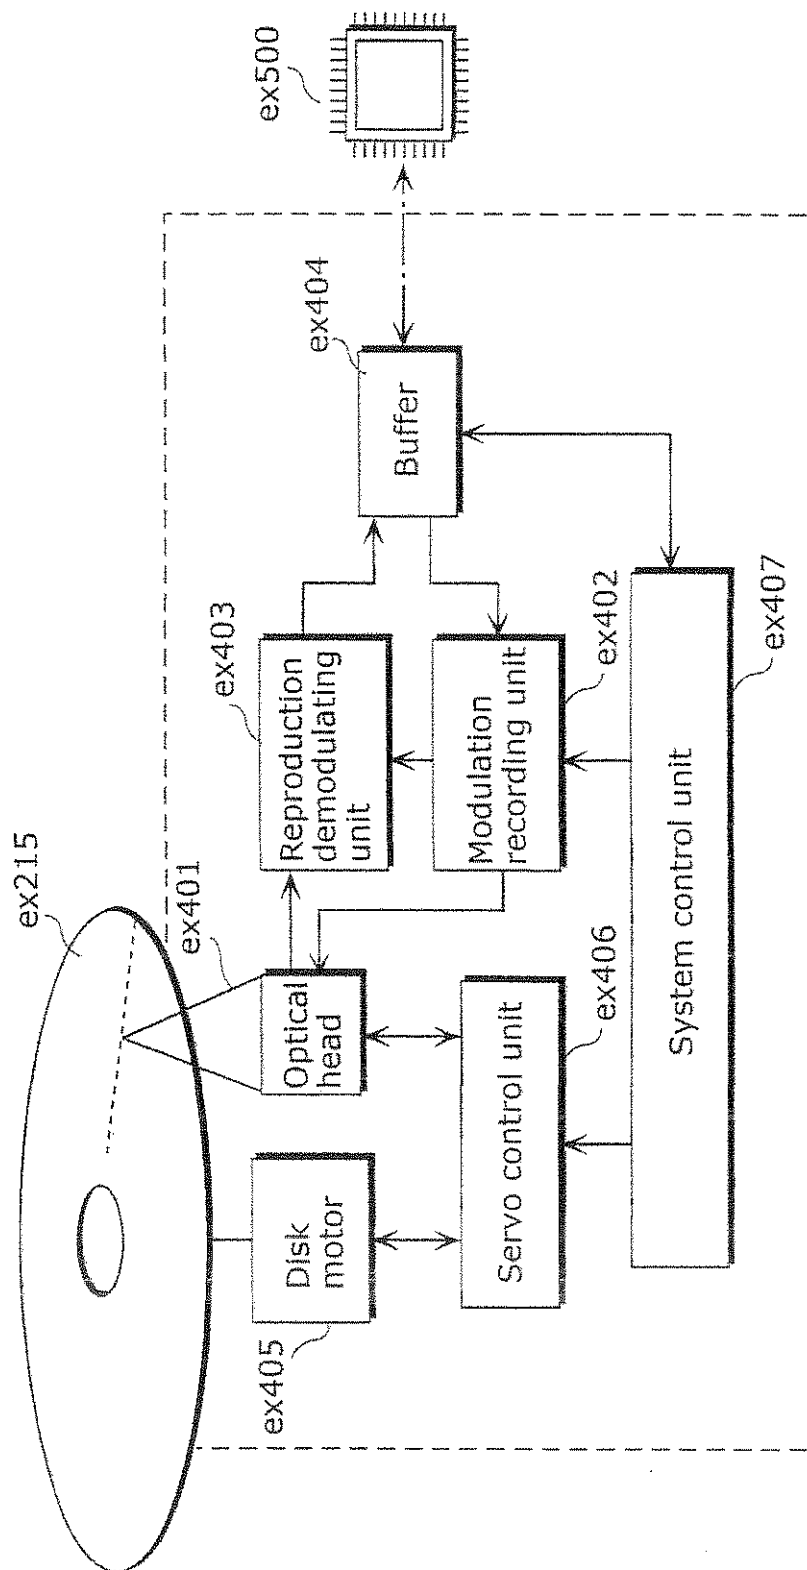

ex400

FIG. 20

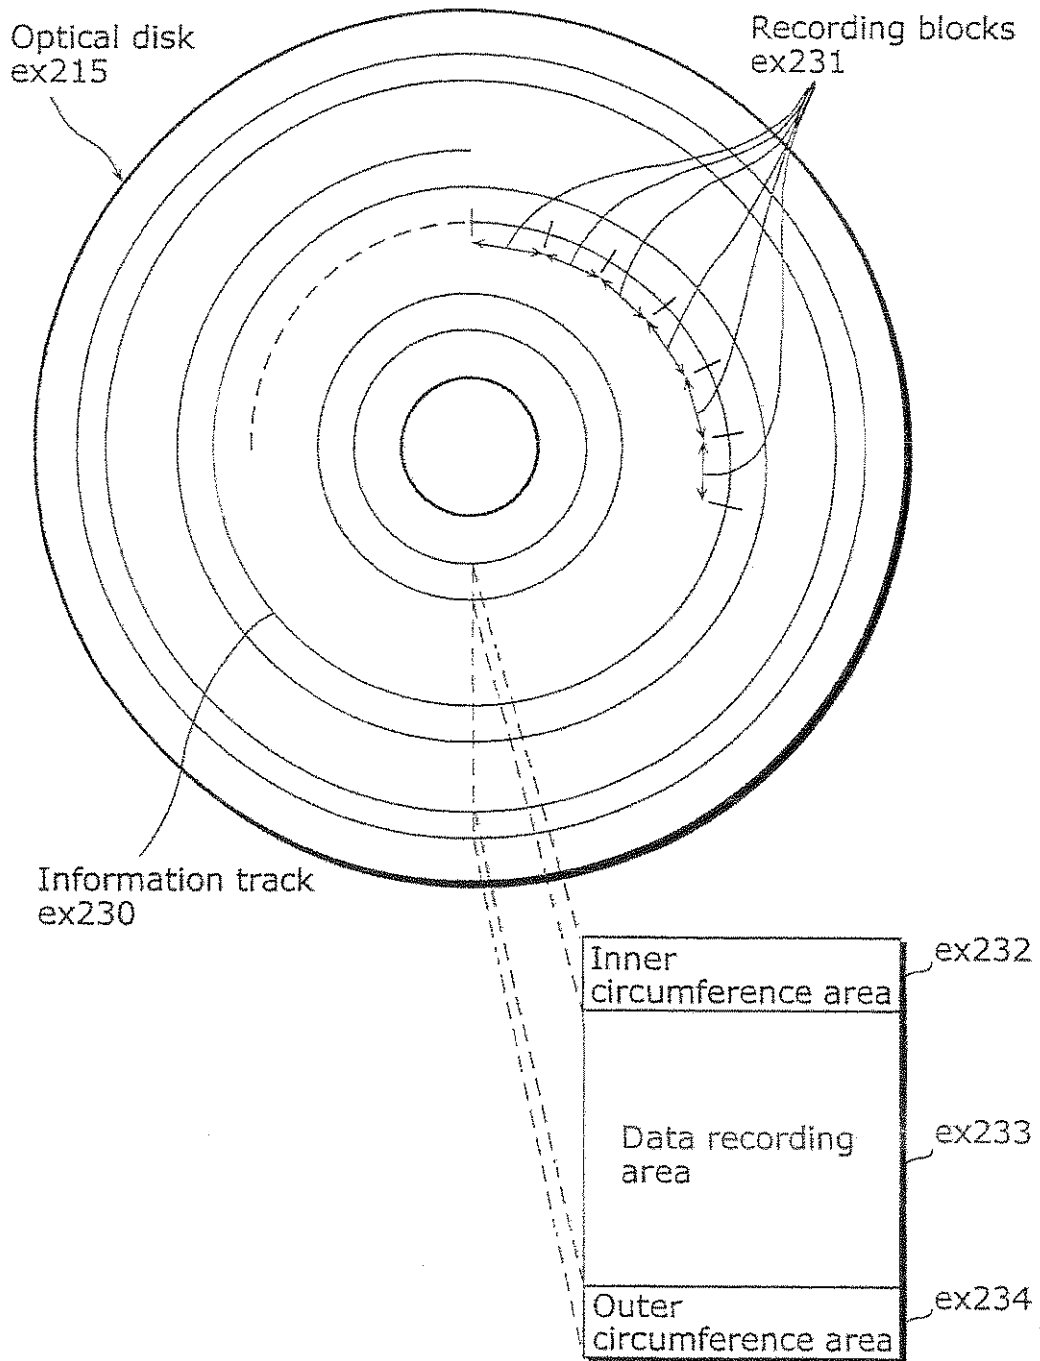


FIG. 21A

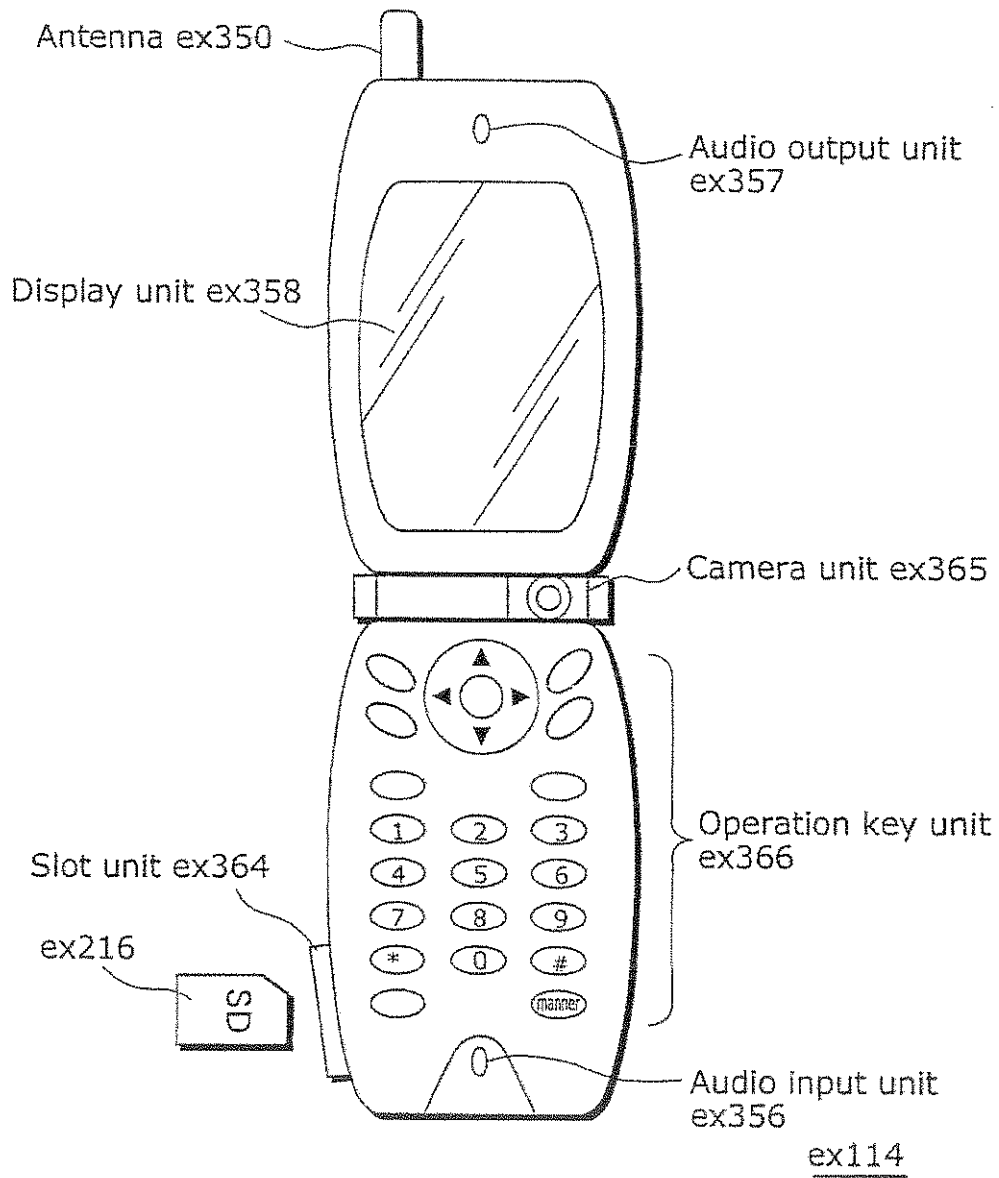


FIG. 21B

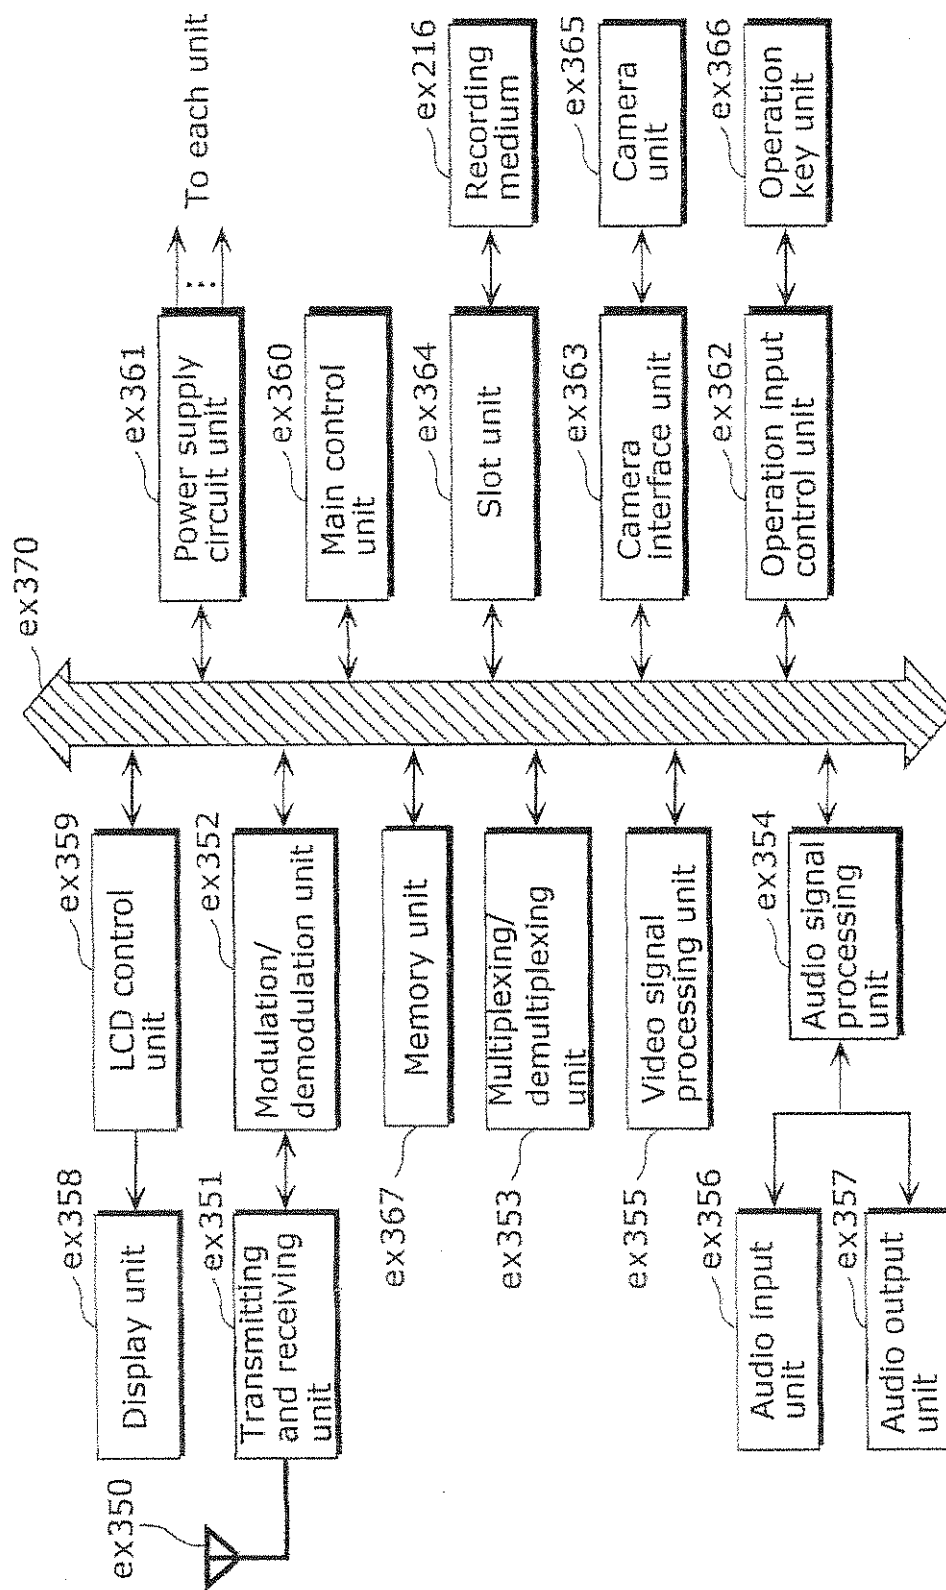


FIG. 22

Video stream (PID=0x1011, Primary video)
Audio stream (PID=0x1100)
Audio stream (PID=0x1101)
Presentation graphics stream (PID=0x1200)
Presentation graphics stream (PID=0x1201)
Interactive graphics stream (PID=0x1400)
Video stream (PID=0x1B00, Secondary video)
Video stream (PID=0x1B01, Secondary video)

FIG. 23

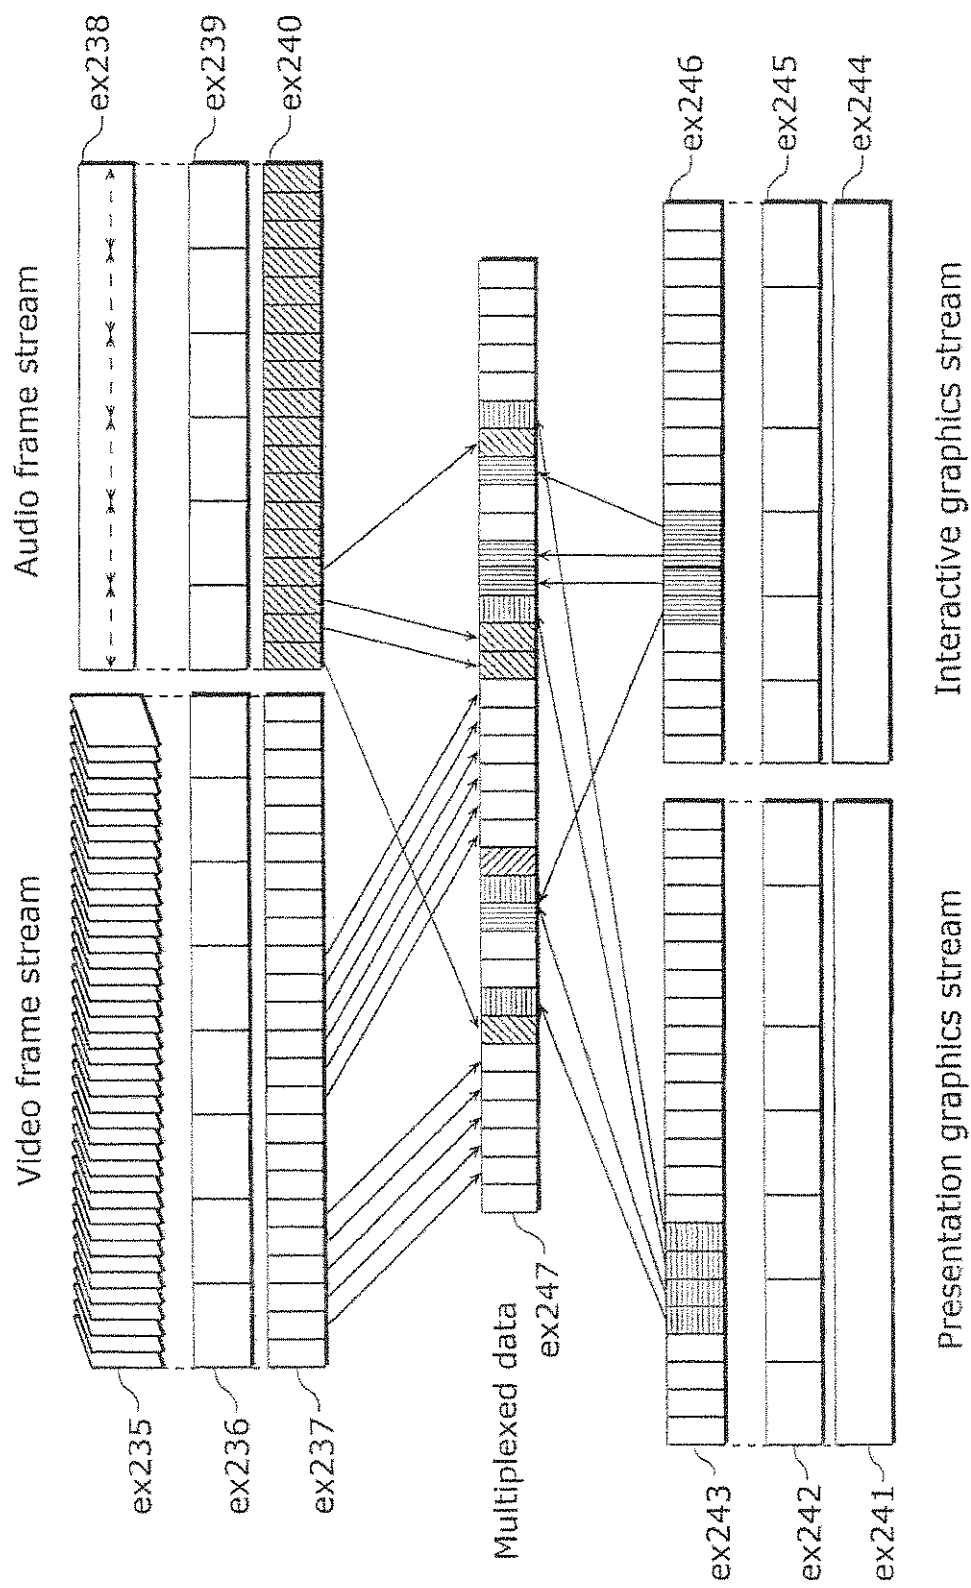


FIG. 24


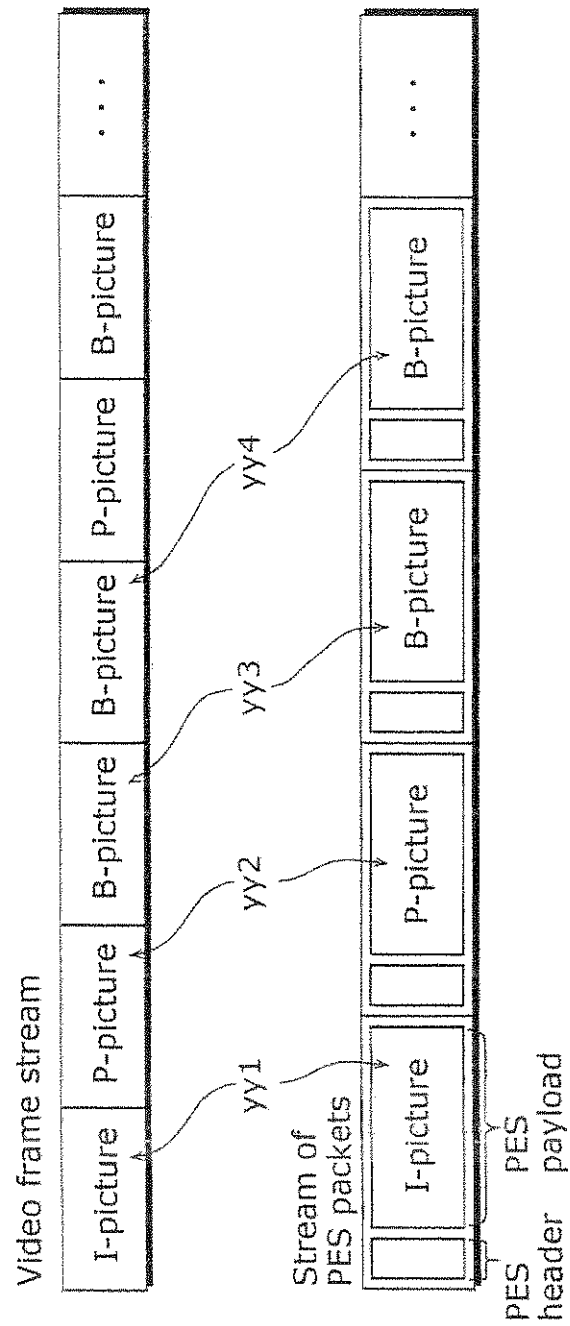



FIG. 25

Stream of TS packets

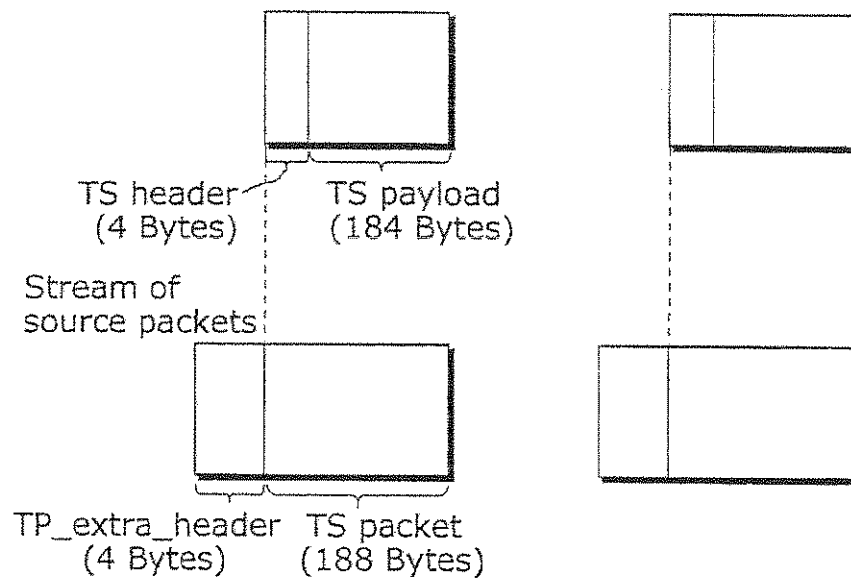

Multiplexed data

SPN 0 1 2 3 4 5 6 7 ...

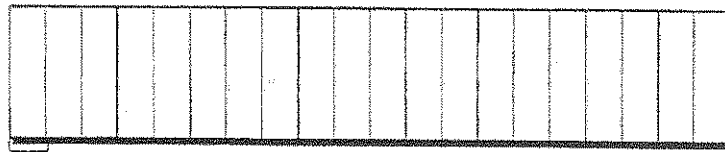

Source packet

FIG. 26

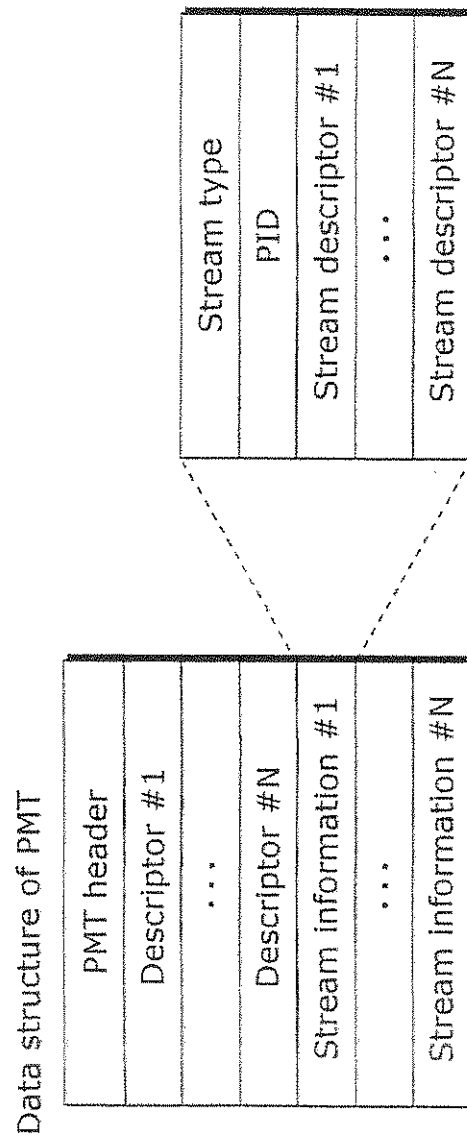


FIG. 27

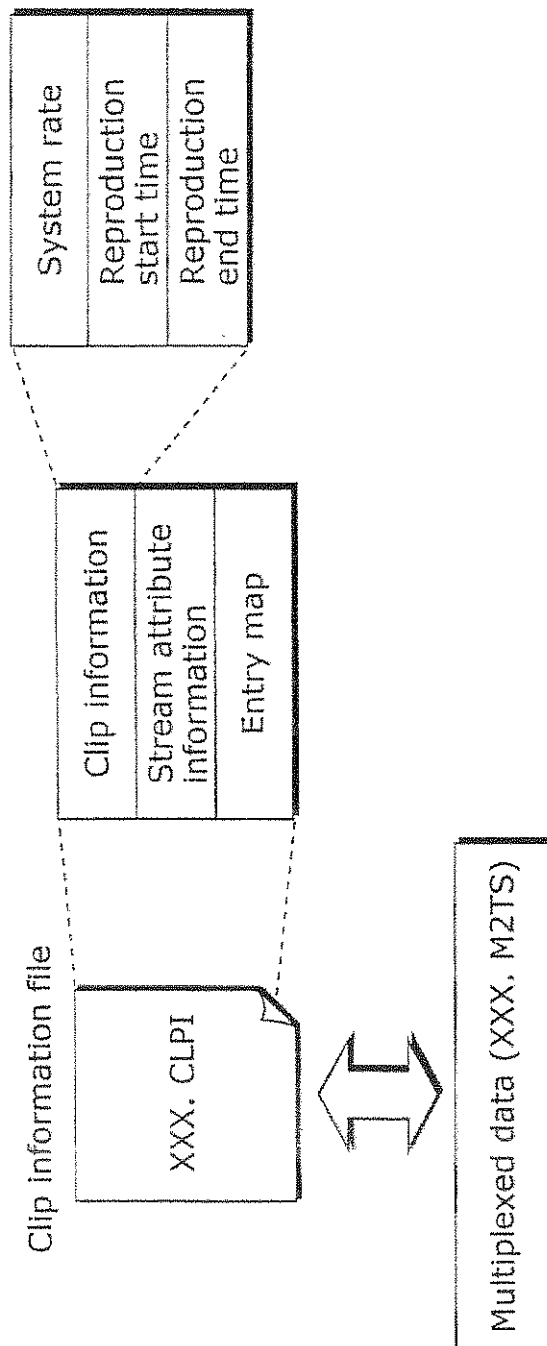


FIG. 28

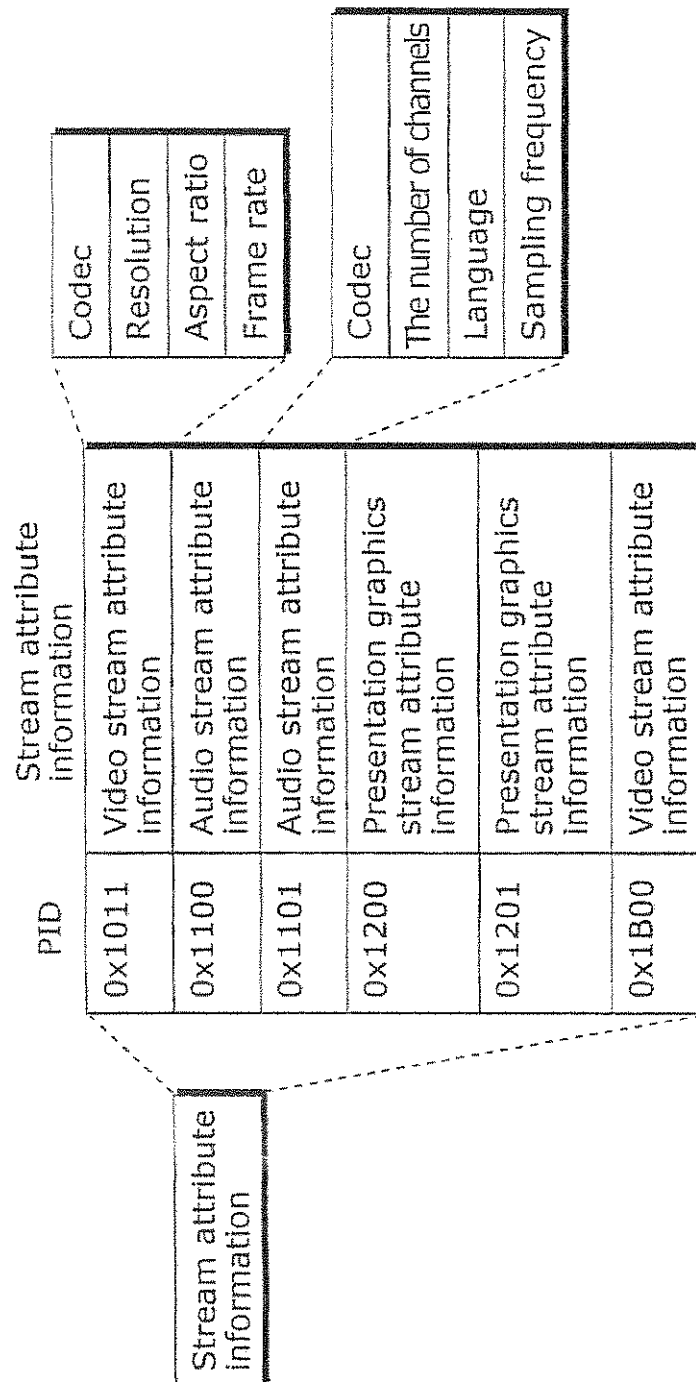


FIG. 29

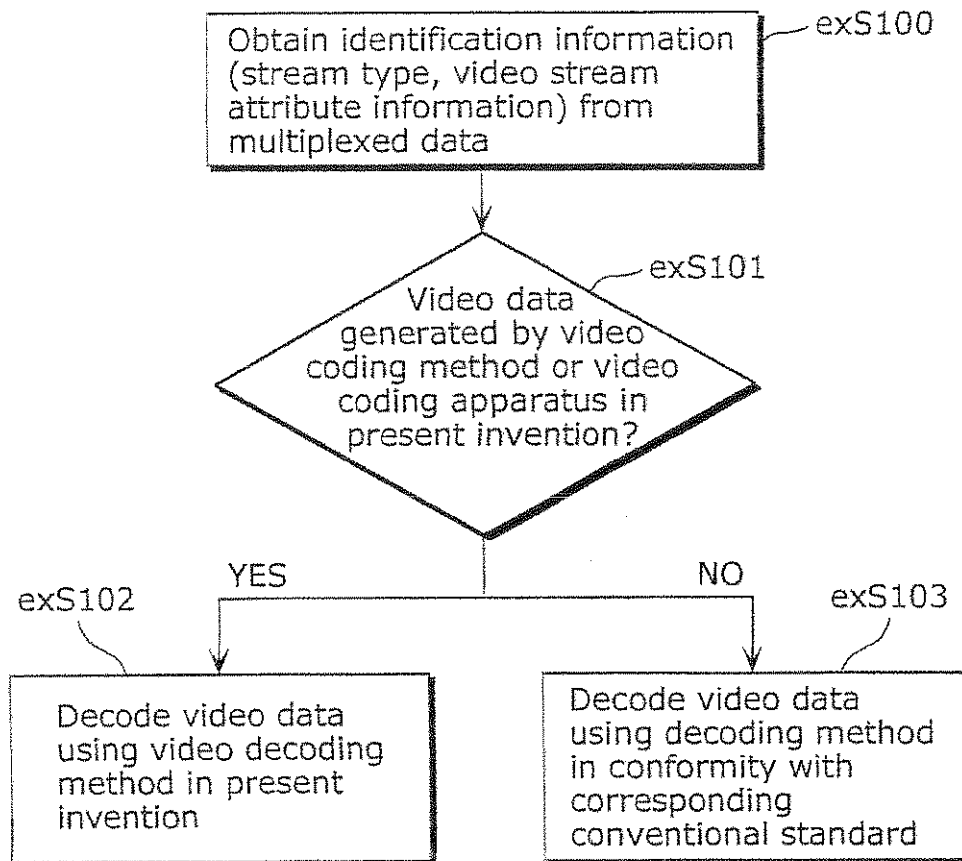


FIG. 30

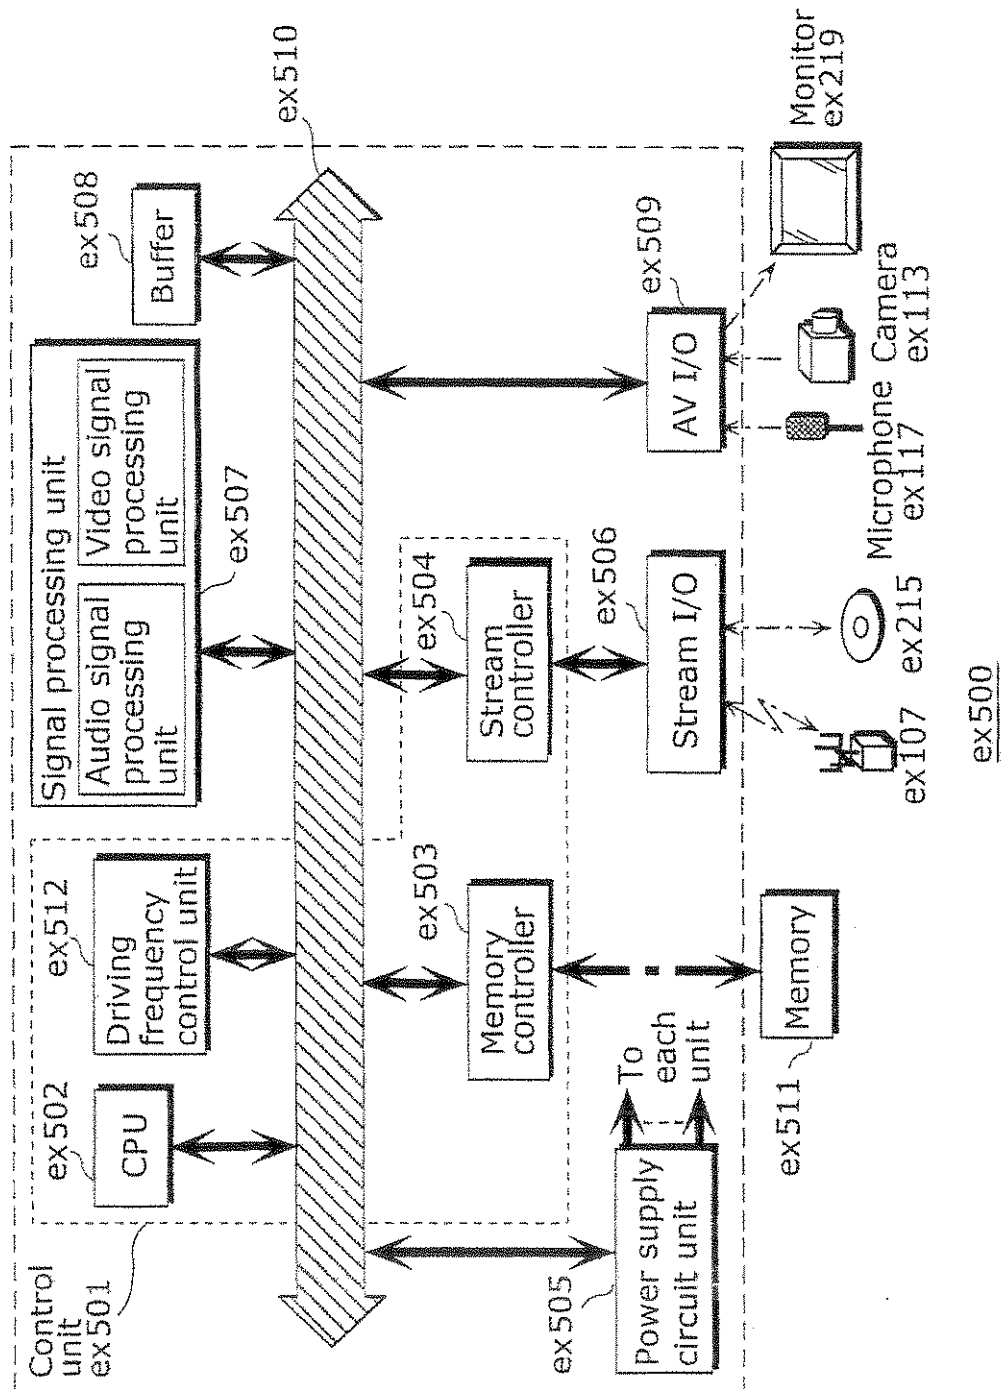


FIG. 31

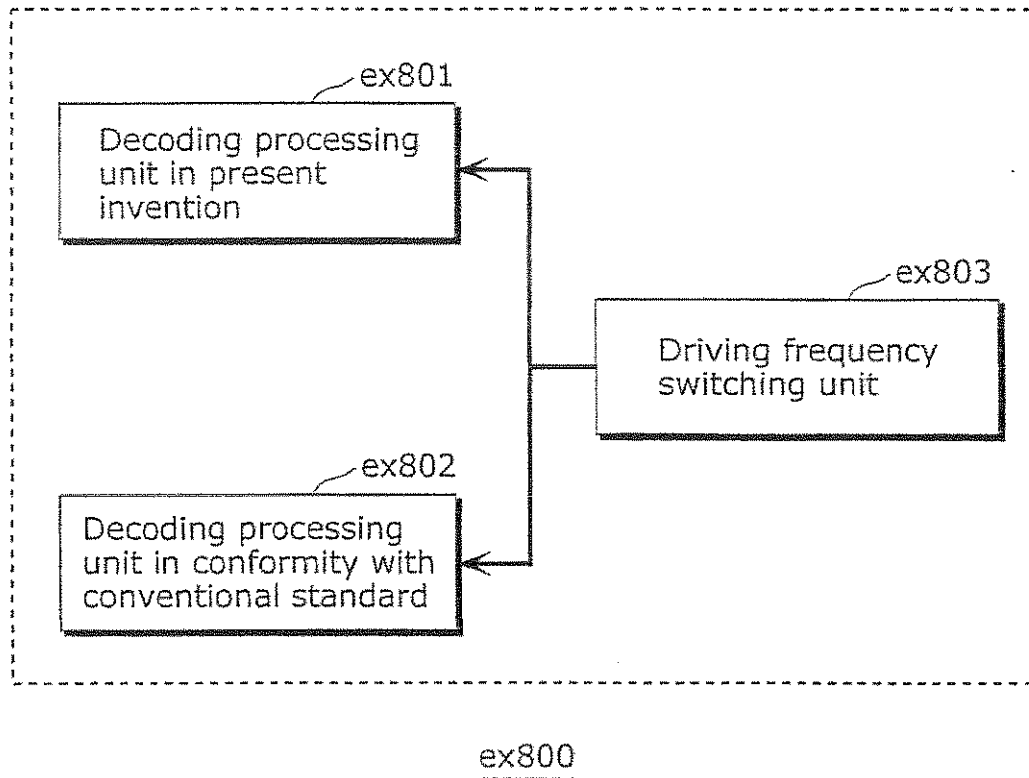


FIG. 32

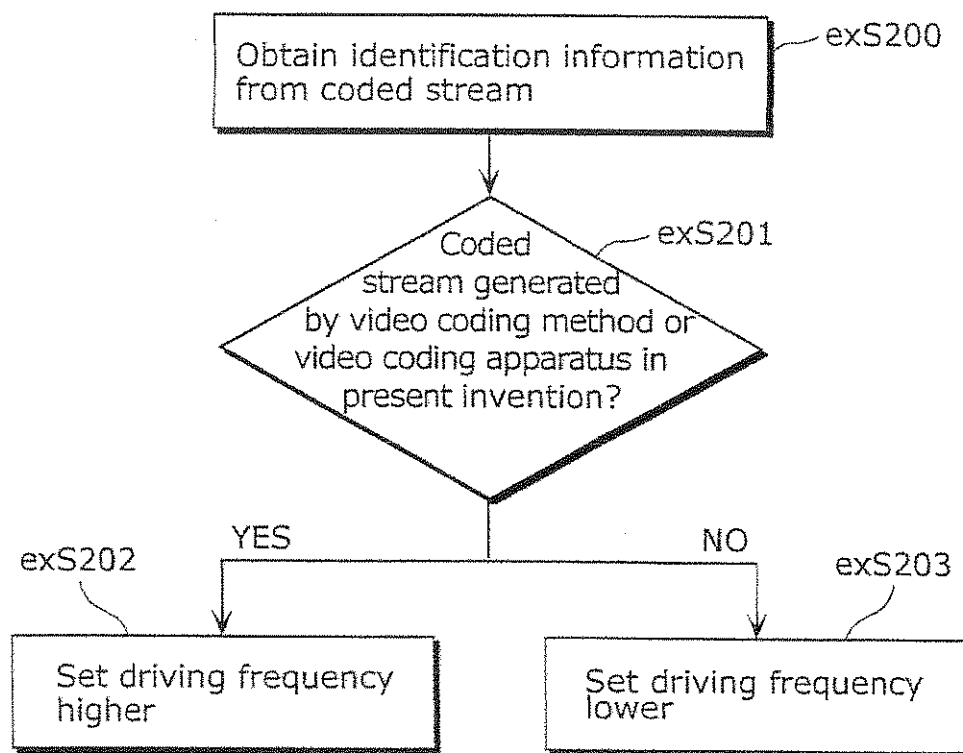


FIG. 33

Corresponding standard	Driving frequency
MPEG-4 AVC	500 MHz
MPEG-2	350 MHz
⋮	⋮

FIG. 34A

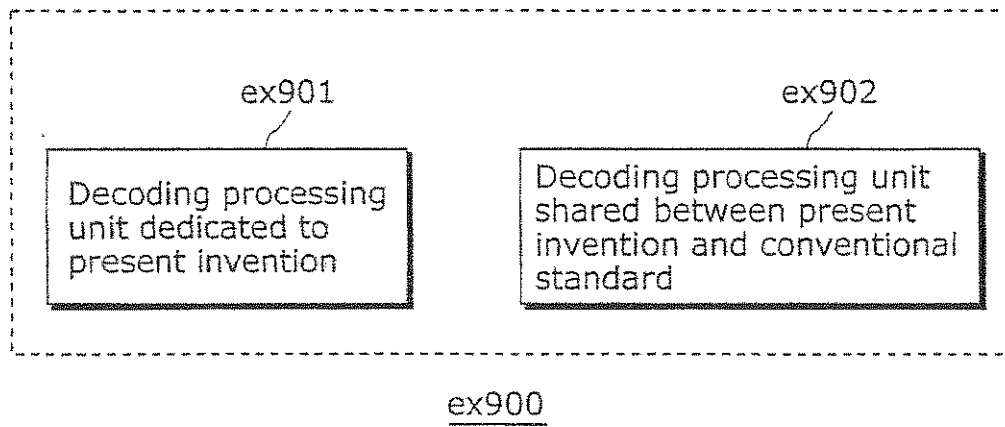


FIG. 34B

