

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number
WO 00/75432 A1

- (51) International Patent Classification⁷: E01F 9/012, 9/013, 13/02
- (21) International Application Number: PCT/AU00/00640
- (22) International Filing Date: 7 June 2000 (07.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PQ 0818 7 June 1999 (07.06.1999) AU
- (71) Applicant and
(72) Inventor: EVANS, Peter, Eric [AU/AU]; Unit 10, 121 Crisp Circuit, Bruce, Australian Capital Territory 2617 (AU).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
- (74) Agent: H.R. HODGKINSON & CO.; Level 3, 20 Alfred Street, Milsons Point, New South Wales 2061 (AU).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ANCHORING OR WEIGHTING SYSTEM FOR PORTABLE ROAD SINGS AND BARRICADES

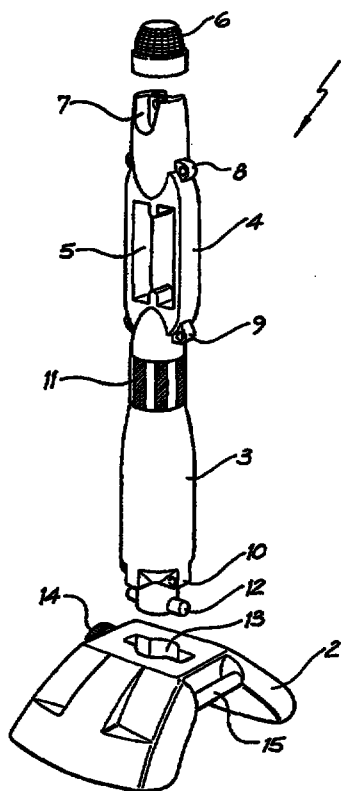

(57) Abstract: An anchoring system (1) for portable barricades or barriers, comprising a base (2) having a cavity space therein to contain water, a vertical post or bollard (3) adapted for attachment to the upper end of the base by a bayonet type fit between the base and the lower end of the post (12, 13), and wherein the upper end of the post includes a horizontal extending slot (5) adapted to receive either a single or two overlapping barricade barrier boards. The upper end (7) of the post (3, 4) may incorporate a warning light (6). The base (2) may incorporate a carry handle (15).

WO 00/75432 A1