

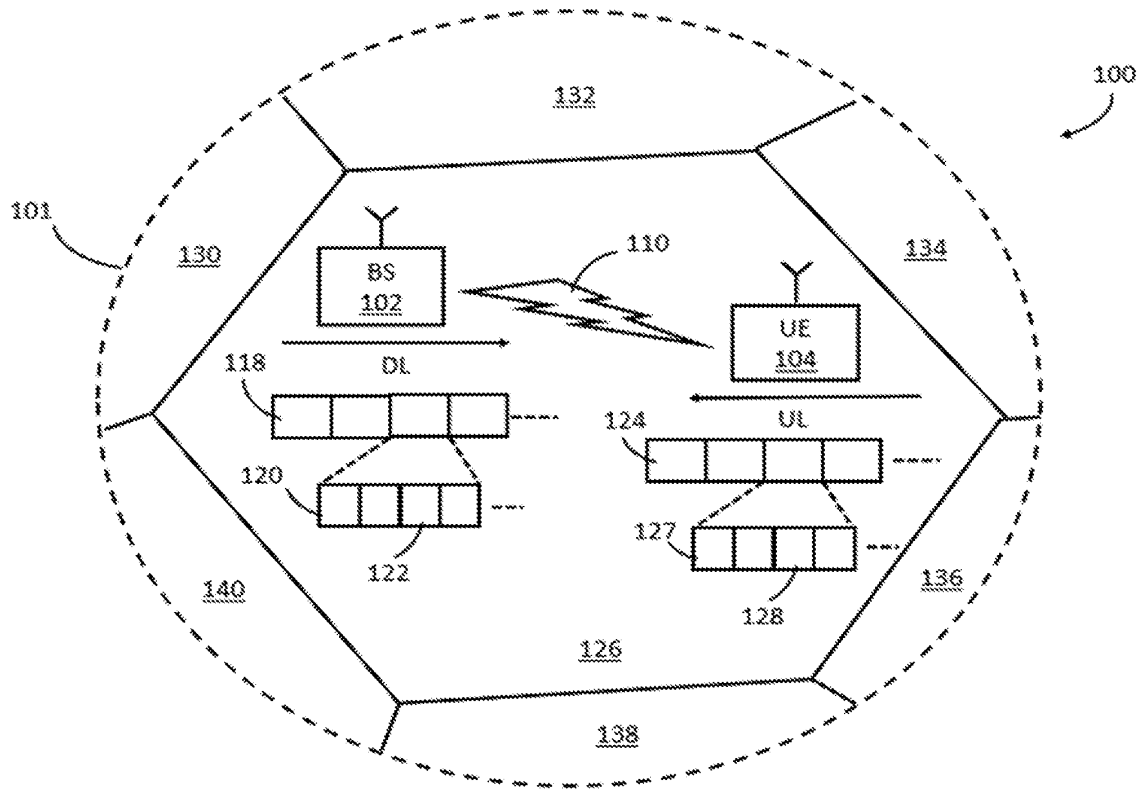


FIG. 1

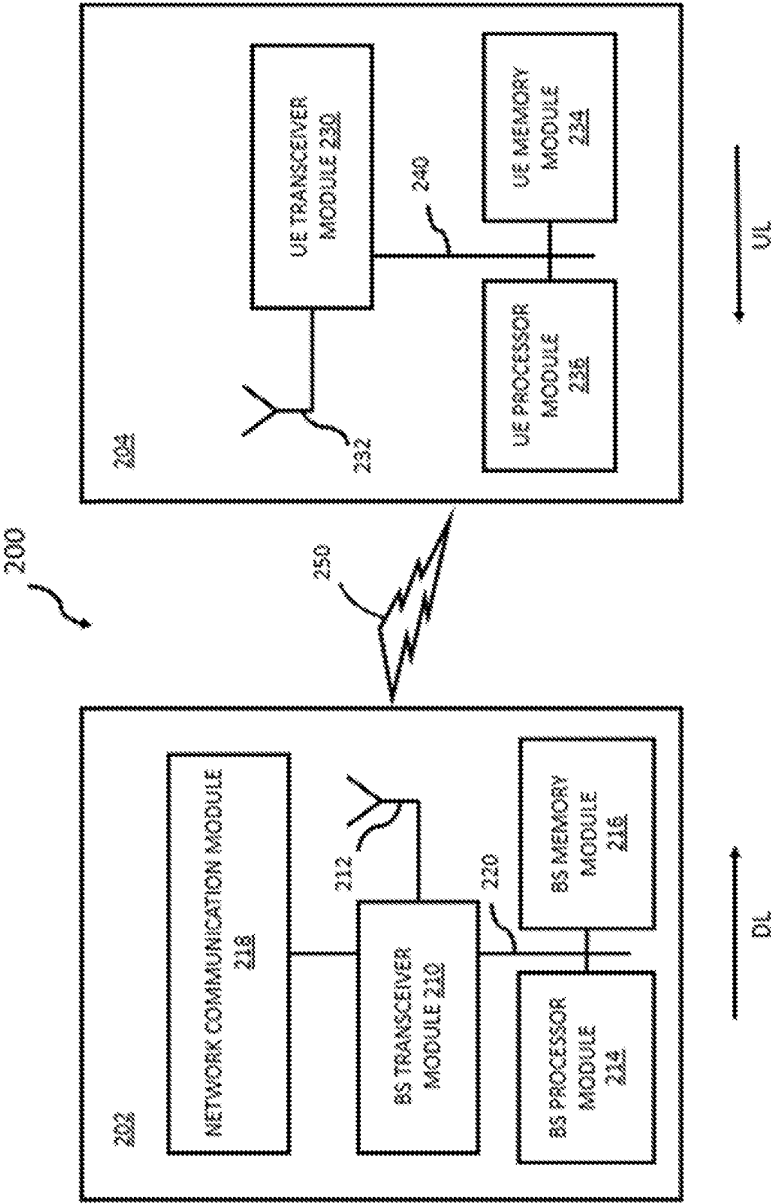


FIG. 2

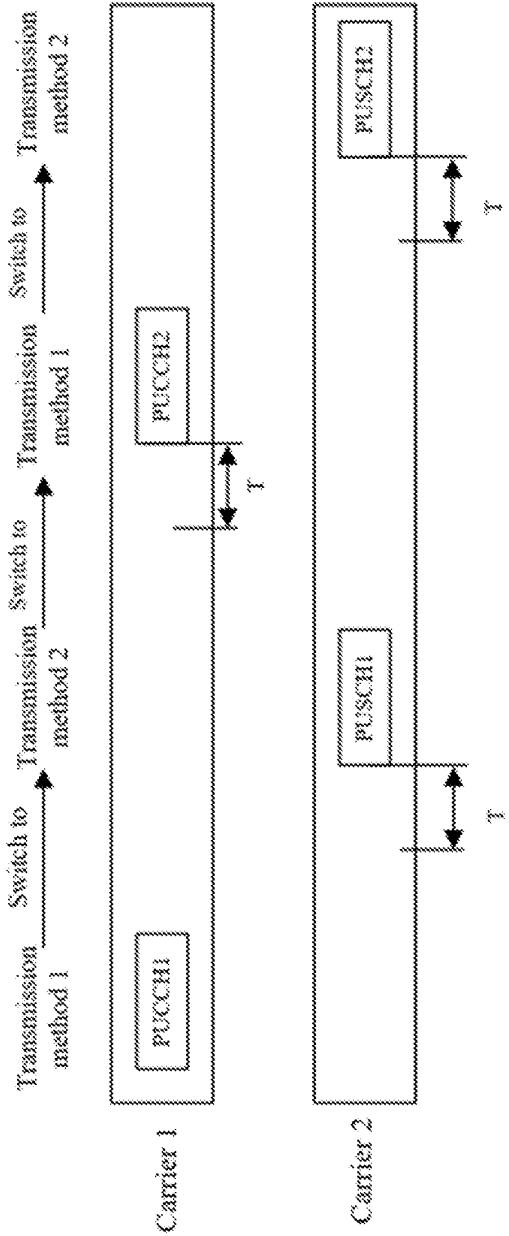


FIG 3

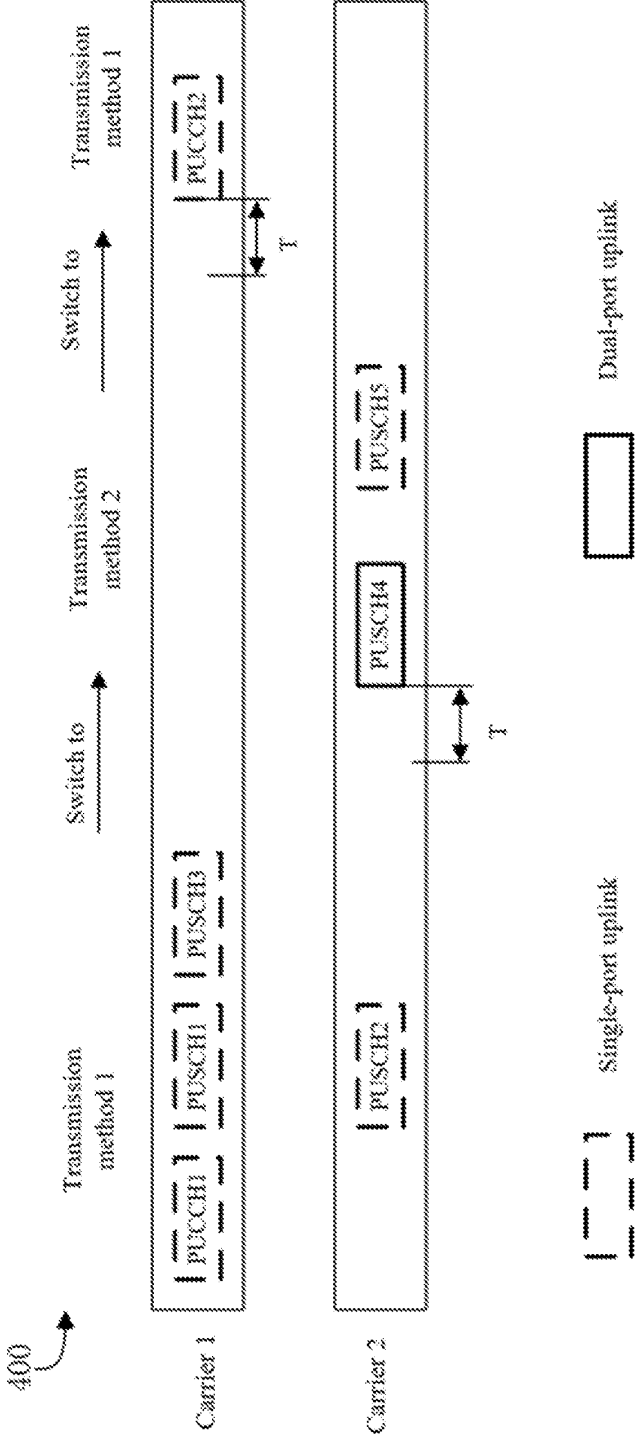


FIG 4

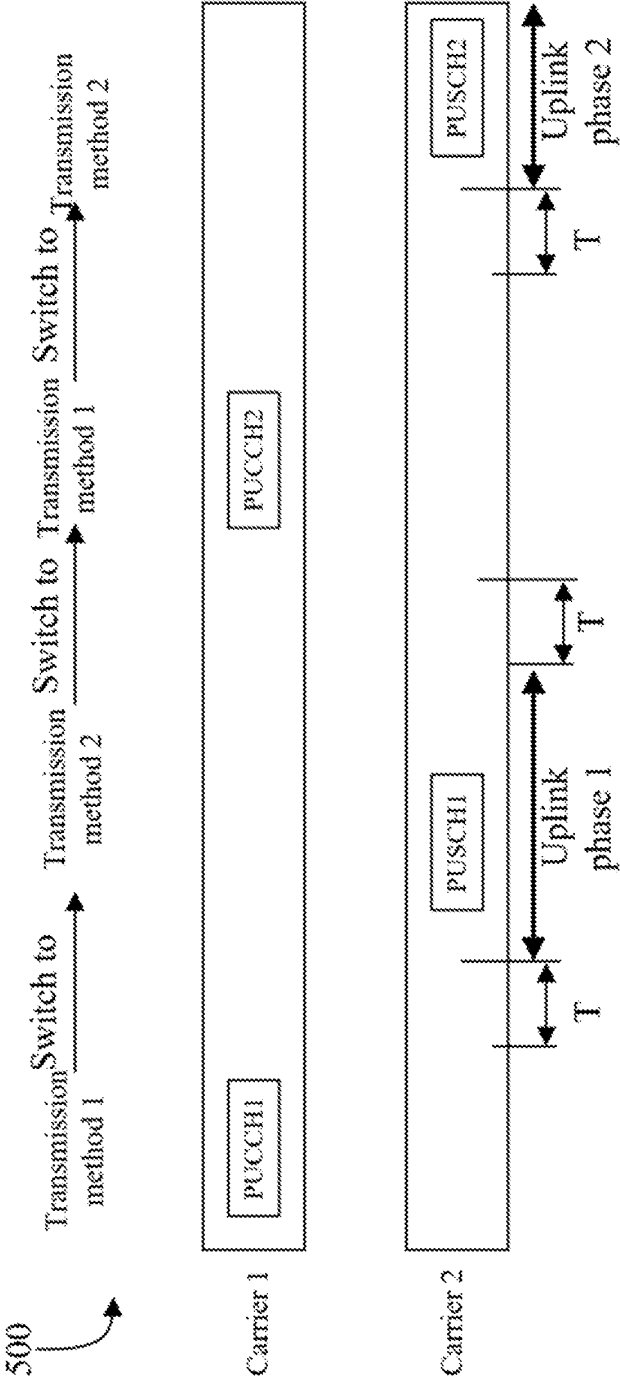


FIG 5

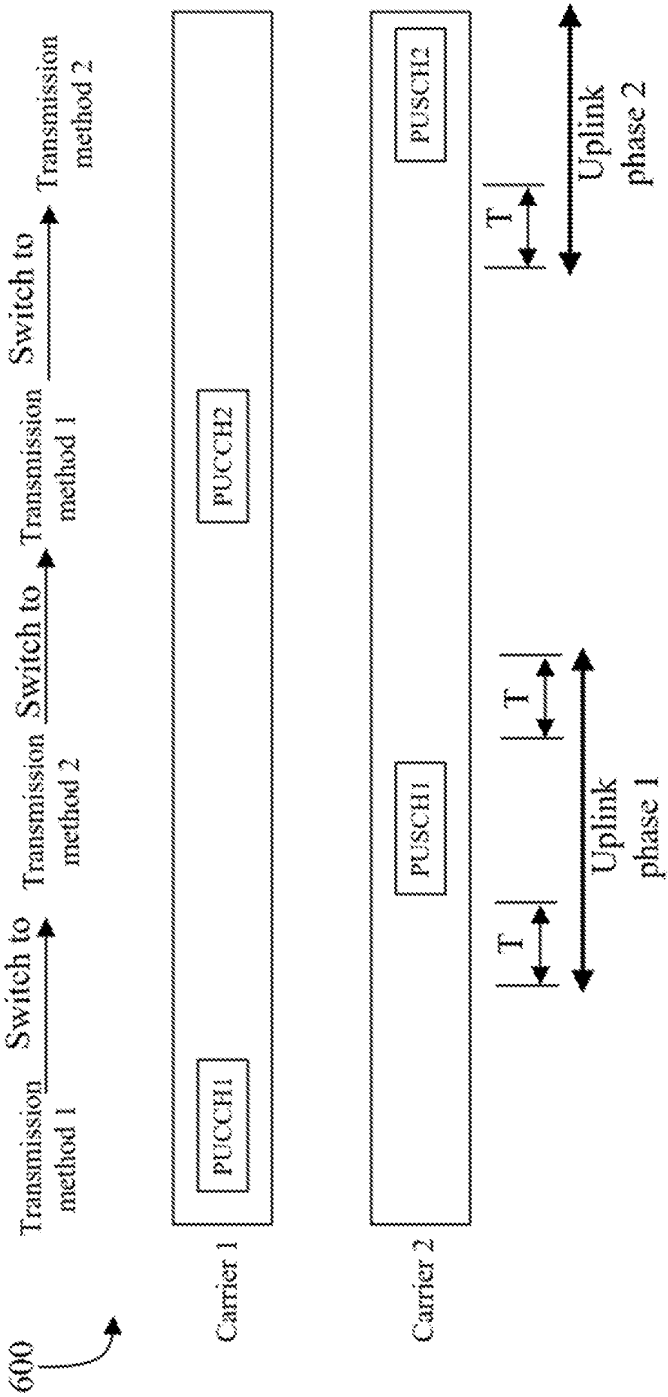


FIG 6

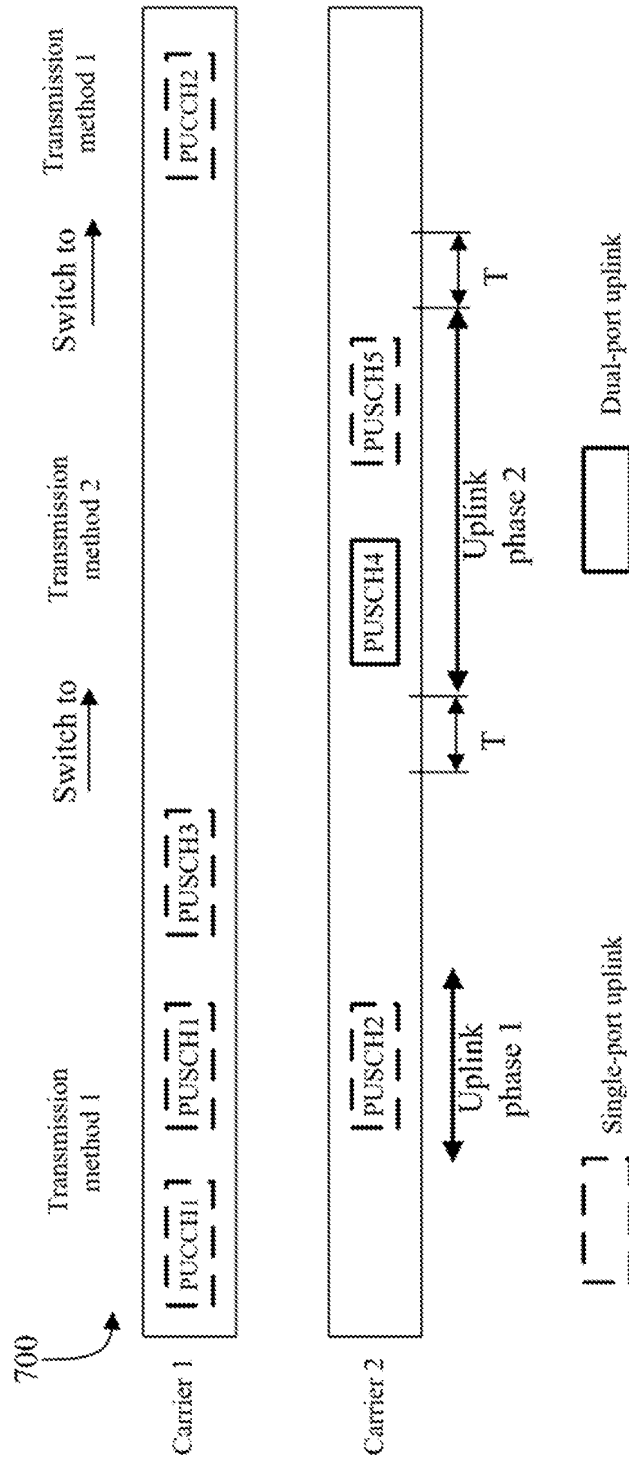


FIG 7

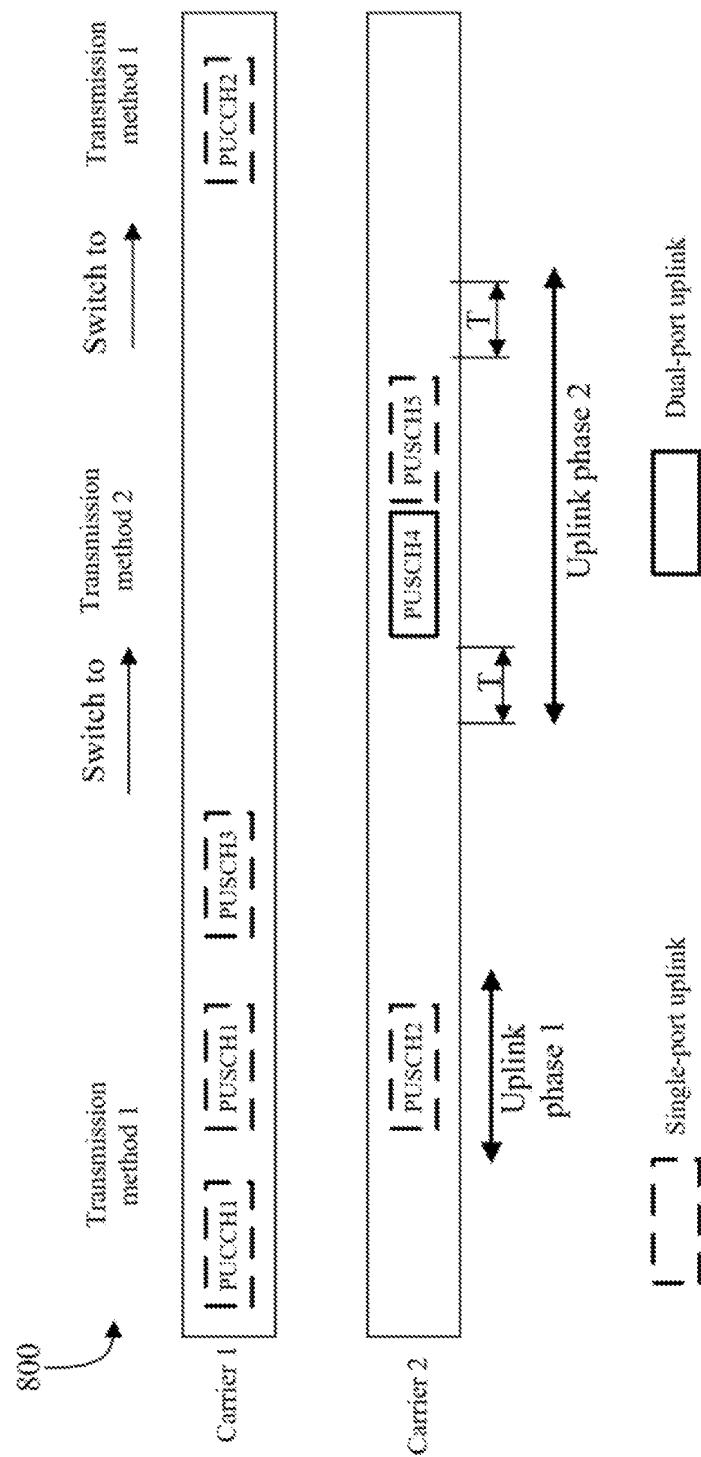


FIG 8

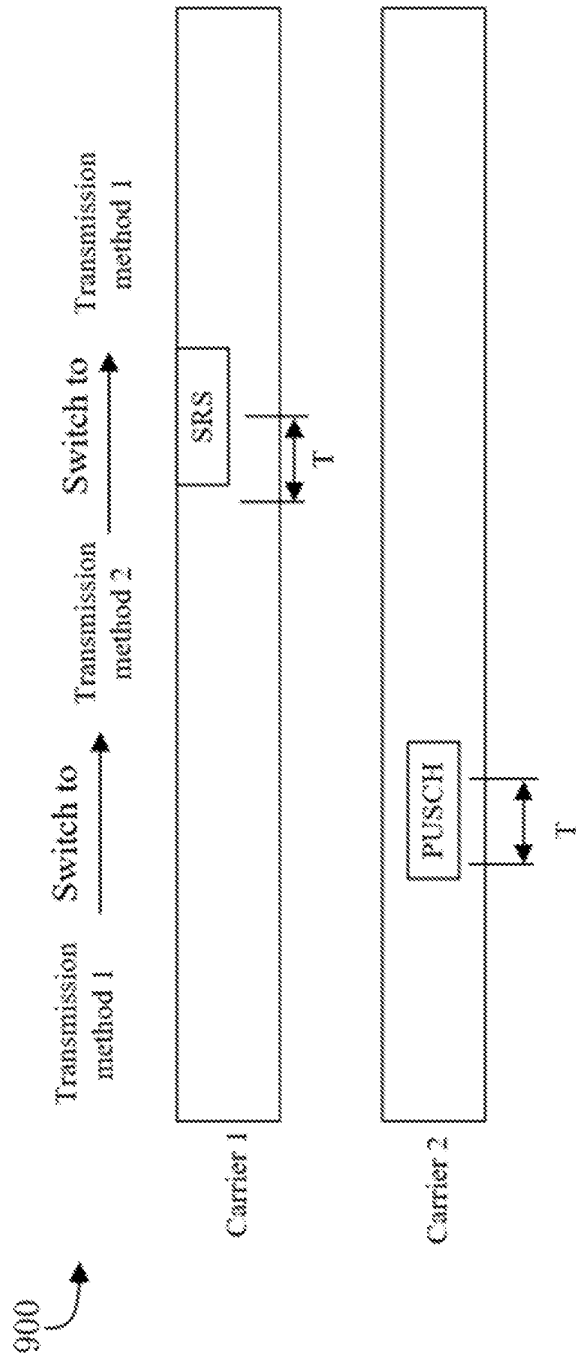


FIG 9

1000



supporting, by a wireless communication device, transmitting single-port uplink signals on a first carrier in response to determining that the wireless communication device is in a first transmission method
1002

supporting, by the wireless communication device, transmitting the single-port uplink signals or dual-port uplink signals on a second carrier in response to determining that the wireless communication device is in a second transmission method
1004

determining, by the wireless communication device based on scheduling information received from a base station, a transmission method used to transmit uplink signals, the transmission method comprises the first transmission method or the second transmission method
1006

FIG. 10

1100

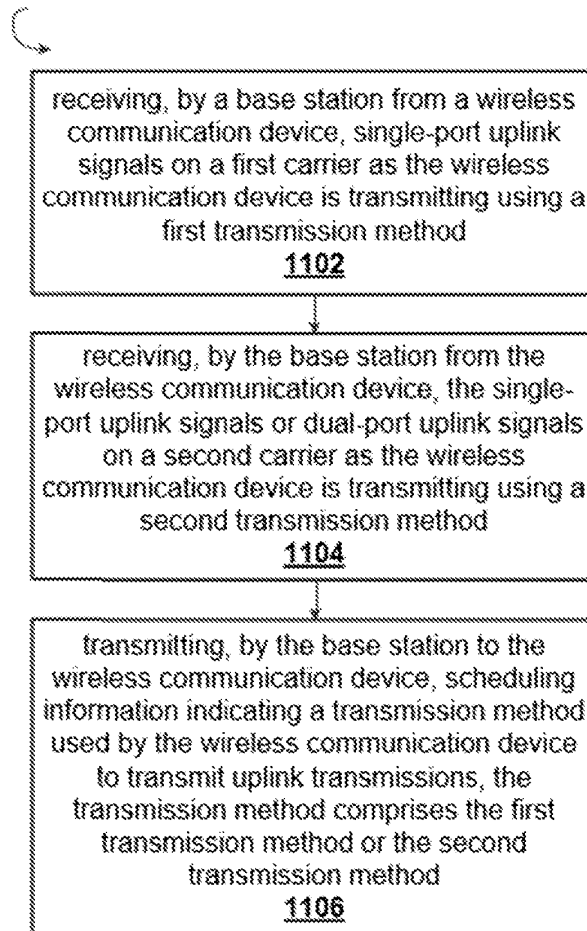


FIG. 11