



(51) International Patent Classification:
D07B 1/06 (2006.01) **D07B 1/14** (2006.01)
D07B 5/00 (2006.01)

(21) International Application Number:
PCT/EP2011/067230

(22) International Filing Date:
3 October 2011 (03.10.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10190081.9 5 November 2010 (05.11.2010) EP

(71) Applicant (for all designated States except US): NV
BEKAERT SA [BE/BE]; Bekaertstraat 2, B-8550 Zw-
evegem (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **AMILS, Xavier**
[ES/BE]; President Rooseveltplein 16A, Bus 12, B-8500
Kortrijk (BE). **TRINDADE DE AVILA, Lasley**
[BR/BR]; Alameda Amazonas 875, Mozart 13, Alphav-
ille, SP 06454-070 Barueri (BR).

(74) Agent: **MESSELY, Marc**; Bekaertstraat 2, B-8550 Zw-
evegem (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT,
LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS,
SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: COMPACTED HYBRID ELEVATOR ROPE

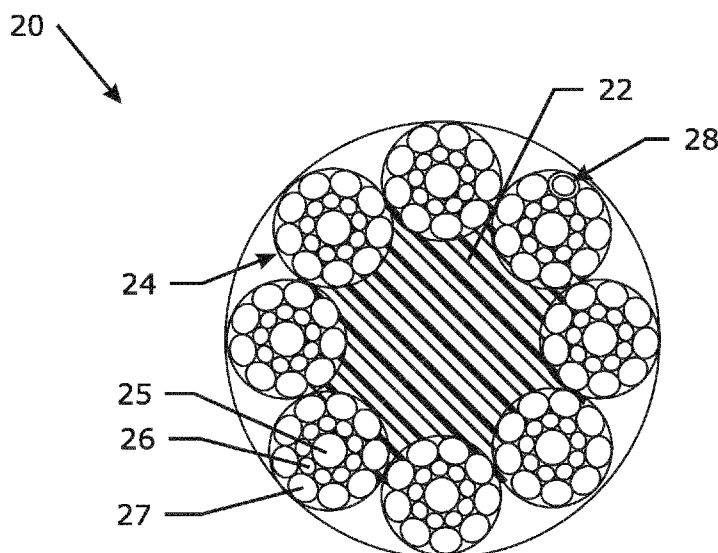


Fig. 2

(57) Abstract: A rope (20) comprising a core element (22) surrounded by a plurality of helically twisted and compacted steel strands (24) comprising steel wires (25, 26, 27) having a nominal tensile strength of at least 1960 N/mm². The core element (22) comprises natural fibres having a linear density of at least 50 g/m.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*