



(51) International Patent Classification:  
*E21B 33/13* (2006.01)

(21) International Application Number:

PCT/US2014/044531

(22) International Filing Date:

27 June 2014 (27.06.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/931,402

28 June 2013 (28.06.2013)

US

(71) Applicant: CAMERON INTERNATIONAL CORPORATION [US/US]; 1333 West Loop South, Suite 1700, Houston, Texas 77027 (US).

(72) Inventors: GUIDRY, Kirk P.; Cameron, 6401 W. Sam Houston Parkway N., Houston, Texas 77041 (US).  
LEVERT JR., Michael F.; Cameron International Corporation, 3505 W. Sam Houston Parkway N., Houston, Texas

77043 (US). SOMMERFELD, Kyle A.; Cameron International Corporation, 3505 W. Sam Houston Parkway N., Houston, Texas 77043 (US).

(74) Agent: EUBANKS IV, L. Lee; Eubanks PLLC, 19500 State Highway 249, Suite 465, Houston, Texas 77070 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

[Continued on next page]

(54) Title: BALL LAUNCHER

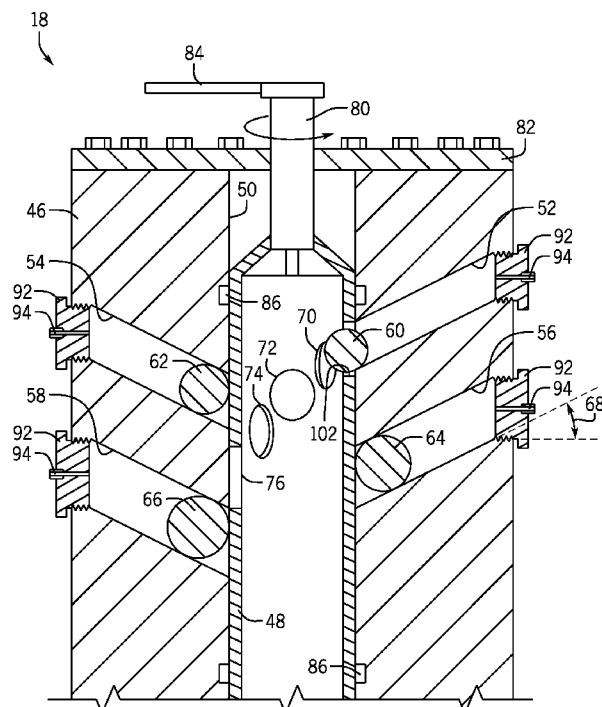


FIG. 5

(57) Abstract: A ball launcher system is provided. In one embodiment, such a system includes a ball launcher (18, 180, 270) having a rotatable sleeve (48, 190) installed within an internal bore of a hollow body (46, 182). The hollow body has ball chutes extending from an external surface to the internal bore. The rotatable sleeve has one or more holes (70, 72, 74, 76, 102, 204) that can be sequentially aligned with the ball chutes by rotation of the sleeve to enable balls (36, 60, 62, 64, 66, 158) within the ball chutes to pass sequentially into a well (12) through the one or more holes. Additional systems, devices, and methods are also disclosed.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

**Published:**

— *with international search report (Art. 21(3))*