

13/02/03  
2003017106

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 May 2002 (30.05.2002)

PCT

(10) International Publication Number  
**WO 02/42602 A1**

(51) International Patent Classification<sup>7</sup>: **E21B 33/047**

Scotland AB15 8TF (GB). **REID, Stephen** [GB/GB]; 31  
Grosvenor Place, Aberdeen, Scotland AB15 8TF (GB).

(21) International Application Number: PCT/US00/32128

(22) International Filing Date:

21 November 2000 (21.11.2000)

(74) Agent: **SMITH, Marlin, R.**; Konneker & Smith, P.C.,  
Suite 230, 660 North Central Expressway, Plano, TX 75074  
(US).

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **HAL-  
LIBURTON ENERGY SERVICES, INC.** [US/US];  
2601 Beltline Road, Carrollton, TX 75006 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **PURKIS, Daniel,  
G.** [GB/GB]; 10 Whinnyfold, Cruden Bay, Aberdeen,  
Aberdeenshire AB42 0QH (GB). **REID, Michael, A.**  
[GB/GB]; 23 Cromar Gardens, Kingswells, Aberdeen,

(81) Designated States (national): AE, AG, AL, AM, AT, AT  
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility  
model), DK, DK (utility model), DM, DZ, EE, EE (utility  
model), ES, FI, FI (utility model), GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility  
model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD,  
SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT,  
TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: APPARATUS FOR THE CONNECTION OF HYDRAULIC CONDUITS

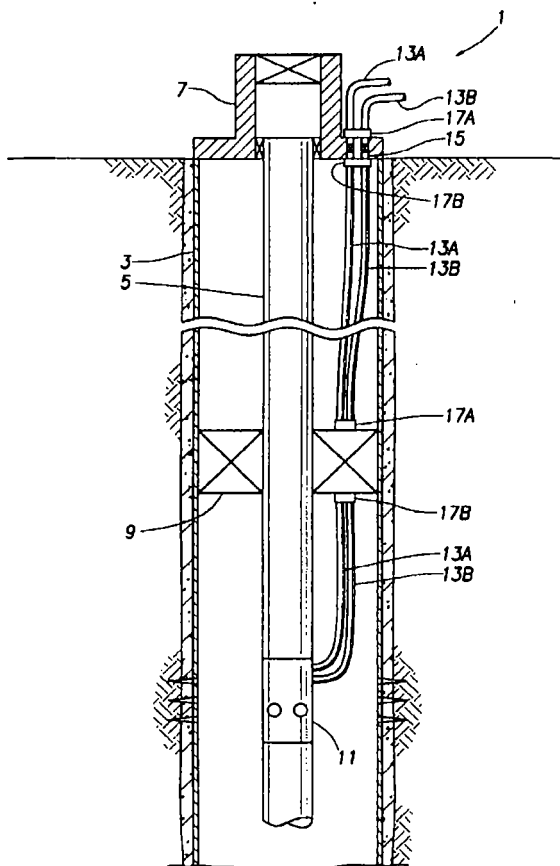

(57) Abstract: A method and apparatus for use with two or more hydraulic conduits deployed downhole reduces a number of penetrations required through a well bulkhead for a given number of fluid paths extending therethrough. In a described embodiment, a fluid conductor includes multiple fluid paths extending therein. The fluid conductor is installed in an aperture formed through a bulkhead. Couplings are connected on opposite sides of the bulkhead to opposite ends of the fluid conductor. Multiple hydraulic lines are connected to each of the couplings.

WO 02/42602 A1



\*162162\*



\*ACTION\*

## WO 02/42602 A1

---

patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*
- *with amended claims*