

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 April 2005 (21.04.2005)

PCT

(10) International Publication Number
WO 2005/035431 A3

(51) International Patent Classification⁷: **F16K 7/04**

(74) Agent: **WOLFE, Dawn, C.**; Storm LLP, Bank of America Plaza, 901 Main Street, Suite 7100, Dallas, TX 75202 (US).

(21) International Application Number:
PCT/US2004/032359

(22) International Filing Date: 1 October 2004 (01.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/508,158 2 October 2003 (02.10.2003) US
10/953,704 29 September 2004 (29.09.2004) US

(71) Applicant (for all designated States except US): **AN-HEUSER-BUSCH, INC.** [US/US]; One Busch Place, St. Louis, MO 63118 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **SPRAY, Richard** [US/US]; 7270 Spring Water Ridge, St. Louis, MO 63129 (US). **MC AFFEE, Rex, Loyd** [US/US]; 1201 Cothrell St., Olathe, KS 66061 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PINCH FAUCET

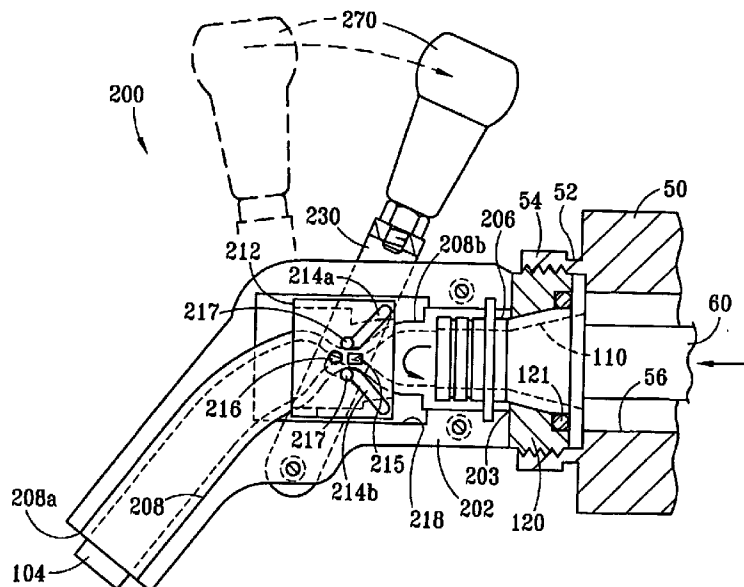

(57) Abstract: The present invention provides a faucet for tapping a liquid, stored under pressure of a gas in a container that has less moving parts subject to wear or breakage, and has a housing made of multiple parts which can be disassembled so the faucet mechanism can be easily cleaned, repaired, or replaced. The faucet mechanism contains a piece of flexible tubing and an arrangement of a pinch valve mechanism that compresses the flexible tubing to shut off flow of liquid through the tubing. In one arrangement of the present invention, since the housing does not move and does not come in contact with the beverage being poured the housing is made of a nonmetallic material, such as a plastic or petroleum-based material, which is less expensive than the previous brass or stainless steel housing.

WO 2005/035431 A3



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

15 September 2005