




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H04L 12/24, H04Q 7/00, H04M 3/42	A1	(11) International Publication Number: WO 00/39960 (43) International Publication Date: 6 July 2000 (06.07.00)
(21) International Application Number: PCT/AU99/01139 (22) International Filing Date: 23 December 1999 (23.12.99) (30) Priority Data: PP 7917 23 December 1998 (23.12.98) AU (71) Applicant (for all designated States except US): TELSTRA CORPORATION LIMITED [AU/AU]; 242 Exhibition Street, Melbourne, VIC 3000 (AU). (72) Inventors; and (75) Inventors/Applicants (for US only): KLEINITZ, Francis, Patrick [AU/AU]; RMB 2150 Nungurner Road, Nungurner, VIC 3909 (AU). McLEOD, Norman, William [AU/AU]; 3 Irvine Street, Glen Iris, VIC 3146 (AU). WILLIAMS, Russell, Clarke [AU/AU]; 18 The Rialto, Malvern East, VIC 3002 (AU). (74) Agents: WEBBER, David, Brian et al.; Davies Collison Cave, 1 Little Collins Street, Melbourne, VIC 3000 (AU).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.

(54) Title: A SYSTEM AND METHOD FOR INTELLIGENT NETWORK SERVICES

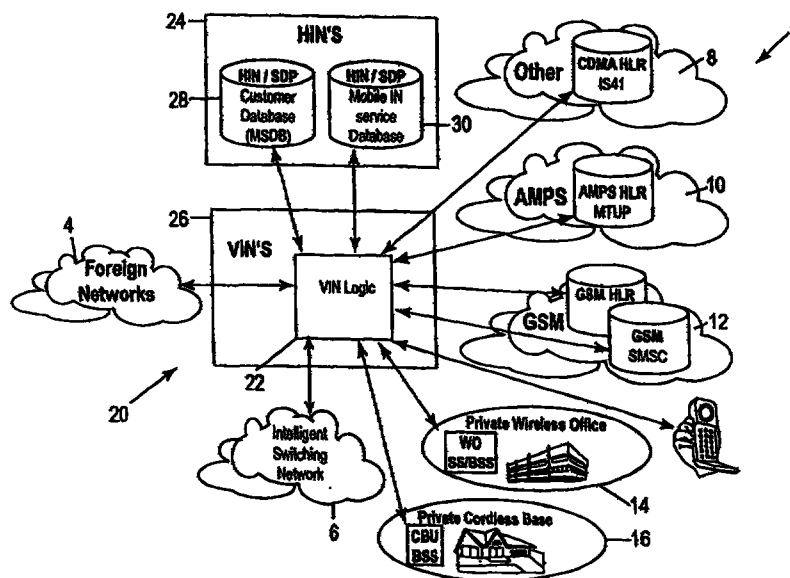

(57) Abstract

A network system having a network switch for processing characteristic data associated with a communications call to determine if Intelligent Network (IN) service data is required to establish the call, and a network service data gateway for receiving the characteristic data from the network switch when the service data is required. The gateway is adapted to process at least part of the characteristic data to determine a network location to access in order to obtain the service data, and a communication protocol for connecting to the network location. The gateway is also adapted to receive the service data and pass the service data to the switch to establish the call. The system has a Home IN and Visitor IN architecture.