



- (51) **International Patent Classification:**
B41J 2/135 (2006.01) *B41J 2/01* (2006.01)
- (21) **International Application Number:**
PCT/US2008/085883
- (22) **International Filing Date:**
8 December 2008 (08.12.2008)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant** (for all designated States except US):
HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P. [US/US]; 11445 Compaq Center Drive W., Houston, Texas 77070 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants** (for US only): **BENJAMIN, Trudy** [US/US]; Hewlett-Packard Company, 18110 SE 34st., Vancouver, Washington 98683 (US). **TORGERSON, Joseph M.** [US/US]; Hewlett-Packard Company, 1000 NE Circle Blvd., Corvallis, Oregon 97330 (US).
- (74) **Agents:** **DANG, Thi D.** et al.; Hewlett-Packard Company, Intellectual Property Administration, Mail Stop 35, P.O. Box 272400, Fort Collins, Colorado 80527-2400 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** FLUID EJECTION DEVICE

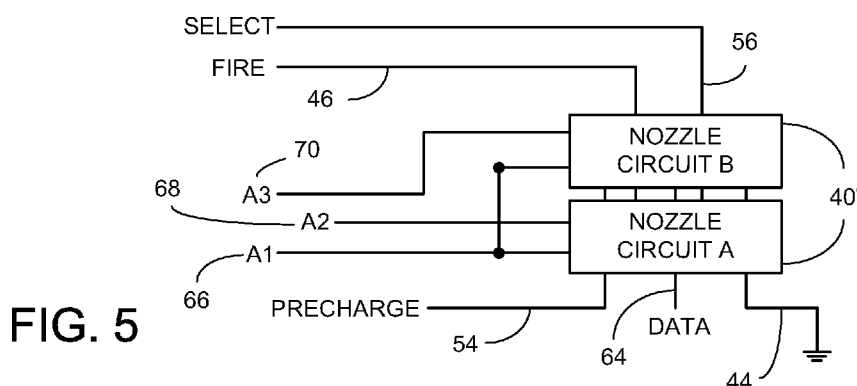

(57) **Abstract:** A fluid ejection device includes a plurality of address lines and a fire line for communicating a fire signal. The device also includes a plurality of nozzle circuits coupled to the fire line and the plurality of address lines. Each nozzle circuit is configured, when enabled, to eject fluid via a different one of a plurality of nozzles in response to the fire signal. A subset of the plurality of address lines is coupled to each pair of the plurality of nozzle circuits. Each subset that is coupled to one of the pairs of nozzle circuits is selected so that simultaneous activation of every address line of that subset simultaneously enables each nozzle circuit in the pair or pairs of nozzle circuits coupled to that triad and none of the other nozzle circuits of the plurality of nozzle circuits.