



- (51) International Patent Classification:  
*B26B 21/22* (2006.01) *B26B 21/52* (2006.01)
- (21) International Application Number:  
PCT/US2014/067170
- (22) International Filing Date:  
24 November 2014 (24.11.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/918,792 20 December 2013 (20.12.2013) US
- (71) Applicant: **THE GILLETTE COMPANY** [US/US];  
World Shaving Headquarters, IP/Legal Patent Department  
- 3E, One Gillette Park, Boston, Massachusetts 02127  
(US).
- (72) Inventor: **HODGSON, Matthew, James**; 460 Basings-  
toke Road, Readnig Berkshire RG2 0QE (GB).
- (74) Agent: **GUFFEY, Timothy B.**; c/o The Procter & Gamble  
Company, Global Patent Services, One Procter & Gamble  
Plaza, C8-229, Cincinnati, Ohio 45202 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report (Art. 21(3))

(54) Title: PIVOTING SHAVING RAZOR HANDLE

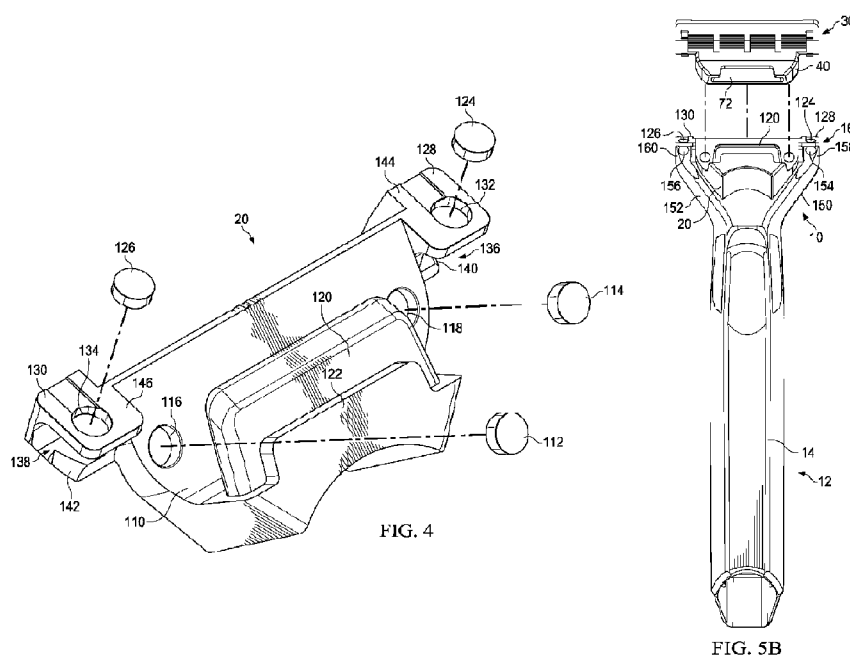

(57) Abstract: A shaving razor system 10 with a handle 12 having a proximal end portion 16 with a pair of spaced apart arms 150, 152, each arm having a biasing magnetic element 154, 156. A connection base 20 is pivotably mounted to the pair of spaced apart arms. The connection base has a pair of spaced apart tabs 128, 130 each defining an opening 136, 138 dimensioned to receive a respective end of the spaced apart arms. Each tab member has a biasing magnetic element 124, 126 that repels the biasing magnetic element of the corresponding arm.