



- (51) International Patent Classification:
E21B 43/08 (2006.01) *E21B 43/12* (2006.01)
- (21) International Application Number:
PCT/US2012/066630
- (22) International Filing Date:
27 November 2012 (27.11.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Boulevard, Houston, TX 77072 (US).
- (72) Inventors: **LEAST, Brandon, T.**; 2601 Beltline Road, Carrollton, TX 75006 (US). **LOPEZ, Jean-Marc**; 2601 Beltline Road, Carrollton, TX 75006 (US). **VEIT, Jan**; 2601 Beltline Road, Carrollton, TX 75006 (US).
- (74) Agent: **SMITH, Marlin, R.**; Smith Ip Services, P.C., P.O. Box 997, Rockwall, TX 75087 (US).

- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

- (54) Title: WELL SCREENS WITH EROSION RESISTANT SHUNT FLOW PATHS

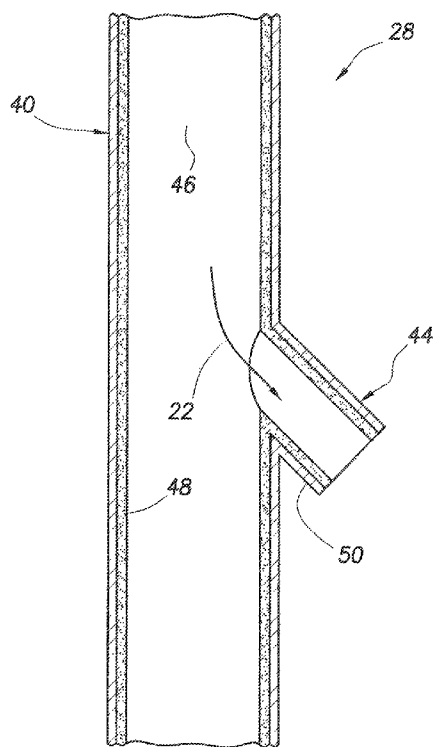


FIG. 5

- (57) Abstract: A well screen can include a shunt flow path, and an erosion resistant layer between the shunt flow path and a body, the erosion resistant layer comprising a coating applied to the body. A method of constructing a well screen can include constructing a shunt flow path having an erosion resistant layer therein, and positioning the shunt flow path with the well screen, whereby the shunt flow path can convey the erosive slurry between opposite ends of the well screen. A system for use with a well can include a well screen including a shunt flow path through which an erosive slurry flows between sections of an annulus external to the well screen, and an internal erosion resistant layer in the shunt flow path.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*