



(51) International Patent Classification:
B60K 17/348 (2006.01) **B62D 55/065** (2006.01)

(21) International Application Number:
PCT/SE2010/051008

(22) International Filing Date:
21 September 2010 (21.09.2010)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0950773-2 20 October 2009 (20.10.2009) SE

(71) Applicant (for all designated States except US): **BAE SYSTEMS HÄGGLUNDS AKTIEBOLAG** [SE/SE]; S-891 82 Örnköldsvik (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NORDBERG, Björn** [SE/SE]; Minkvägen 8, S-891 42 Örnköldsvik (SE).

(74) Agent: **ALBIHNS.ZACCO AB**; P.O. Box 5581, Vallhallavägen 117, S-114 85 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD FOR PROPELLING AN ARTICULATED TRACKED VEHICLE

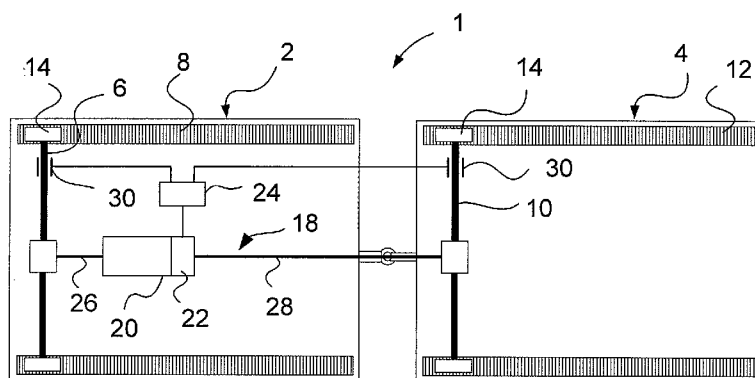


Fig. 2

(57) Abstract: The invention relates to a method for propelling an articulated tracked vehicle (1) provided with at least a front and rear vehicle portion (2, 4), comprising a front drive shaft (6), which rotates a front track (8) on the front vehicle portion (2); a rear drive shaft (10), which rotates a rear track (12) on the rear vehicle portion (4), the front drive shaft (6) being disposed in the front vehicle portion (2) and the rear drive shaft (10) being disposed in the rear vehicle portion (4). At least one motor (20, 34, 36) rotates the respective front and rear drive shaft (6, 10) in order thus to propel the vehicle (1) at a speed in relation to a ground surface (16). The front drive shaft (6) is rotated at a first speed and the rear drive shaft (10) is rotated at a second speed, which first and second speeds are different, so that the front and rear tracks (8, 12) rotate at different speeds.

