



- (51) International Patent Classification:
C08G 59/32 (2006.01) *C09J 163/00* (2006.01)
C08G 59/40 (2006.01)
- (21) International Application Number:
PCT/US2015/060904
- (22) International Filing Date:
16 November 2015 (16.11.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2014-237170 21 November 2014 (21.11.2014) JP
- (71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).
- (72) Inventors: **KASAHARA, Takahiro**; 33-1, Tamagawadai 2-chome, Setagaya-ku, Tokyo 158-8583 (JP). **KOSEKI, Daiki**; 33-1, Tamagawadai 2-chome, Setagaya-ku, Tokyo 158-8583 (JP). **KOBAYASHI, Hiroyuki**; 33-1, Tamagawadai 2-chome, Setagaya-ku, Tokyo 158-8583 (JP).
- (74) Agents: **GALLAGHER, Ann K.** et al.; 3M Center Office of Intellectual Property Counsel Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) Title: EPOXY ADHESIVE, AUTOMOTIVE MEMBER, AND METHOD FOR MANUFACTURING SAME

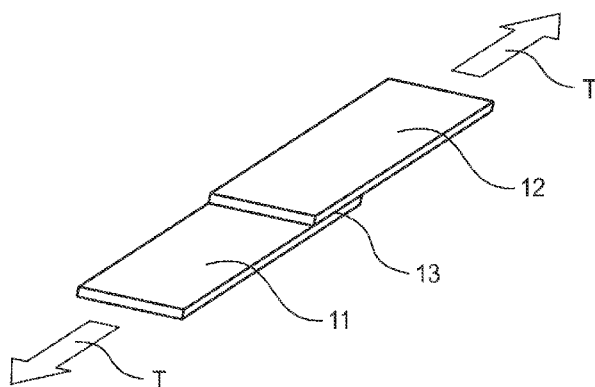


FIG. 1

(57) Abstract: To provide an epoxy adhesive having a high glass transition temperature and low viscosity, and having excellent adhesive properties, as well as to provide an automotive member that uses this adhesive, and a manufacturing method thereof. One embodiment provides an epoxy adhesive containing (A) epoxy, (B) a core-shell toughening agent, and (C) a latent curing agent that does not include an aniline backbone, wherein the epoxy (A) includes at least 50 mass % of a trifunctional or higher liquid epoxy. Another embodiment provides an automotive member including a first adherend, a second adherend, and a cured epoxy adhesive provided between the first adherend and the second adherend and cured to bond the first adherend and the second adherend.