

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
24 December 2020 (24.12.2020)



(10) International Publication Number
WO 2020/255026 A1

(51) International Patent Classification:
A47J 31/54 (2006.01)

(21) International Application Number:
PCT/IB2020/055725

(22) International Filing Date:
18 June 2020 (18.06.2020)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
102019000009381 18 June 2019 (18.06.2019) IT

(71) Applicant: RHEAVENDORS SERVICES S.P.A.
[IT/IT]; Via Valleggio, 2/BIS, 22100 Como (IT).

(72) Inventor: BRUZZESE, Fabio; c/o Rheavendors Services
S.P.A., Via Valleggio, 2/BIS, 22100 Como (IT).

(74) Agent: MARTINI, Gabriele et al.; c/o Studio Torta S.p.A.,
Via Viotti, 9, 10121 Torino (IT).

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- in black and white; the international application as filed
contained color or greyscale and is available for download
from PATENTSCOPE

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

(54) Title: CONTINUOUS-FLOW ELECTROMAGNETIC-INDUCTION FLUID HEATER IN A VENDING- MACHINE FOR
PREPARING BEVERAGES

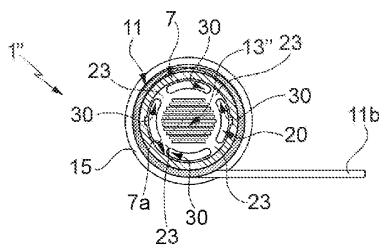


FIG. 7

(57) Abstract: A continuous-flow electromagnetic-induction fluid heater (1, 1', 1'') in a vending machine for preparing beverages. The continuous-flow electromagnetic-induction fluid heater (1, 1', 1'') comprises a tubular body (7) internally defining at least one channel (7a) for a fluid and including at least one inlet opening (8) through which the fluid to be heated is fed, in use, to the channel (7a) and one outlet opening (10) through which the heated fluid flows out, in use, from the channel (7a); a heating element (13, 13', 13'') arranged, at least partially, inside the channel (7a) so as to be lapped, in use, by a water flow; and an electric winding (11) wound directly in contact around an external surface (12) of the tubular body (7) and which can be electrically powered to generate an electromagnetic induction field and heat, in this manner, the heating element (13, 13', 13'') by the effect of the electromagnetic induction field. The continuous-flow7 electromagnetic-induction fluid heater (1, 1', 1'') further comprises an upstream fluid baffle (25), which is housed within the channel (7a) in a position fluidically downstream of the inlet opening (8) and fluidically upstream of the heating element (13, 13', 13''), with respect to the direction of the fluid flow from the inlet opening (8) to the outlet opening (10), and is shaped so as to reduce the hydrodynamic drag on said fluid between the inlet opening (8) and the heating element (13, 13', 13'').