

5 **MUSICAL INSTRUMENTS INCORPORATING LOUDSPEAKERS**10 **DESCRIPTION**15 **TECHNICAL FIELD**


The invention relates to musical instruments and more particularly to electronic keyboard musical instruments incorporating loudspeakers.

BACKGROUND ART

20 It is known from GB-A-2262861 to suggest a panel-form loudspeaker comprising:-

a resonant multi-mode radiator element being a unitary sandwich panel formed of two skins of material with a spacing core of transverse cellular construction, wherein
25 the panel is such as to have ratio of bending stiffness (B), in all orientations, to the cube power of panel mass per unit surface area (μ) of at least 10;

a mounting means which supports the panel or attaches

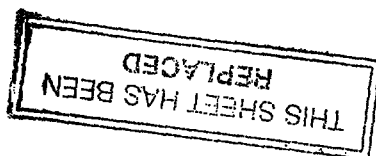

to it a supporting body, in a free undamped manner;

and an electro-mechanical drive means coupled to the panel which serves to excite a multi-modal resonance in the radiator panel in response to an electrical input within a
5 working frequency band for the loudspeaker.

DISCLOSURE OF INVENTION

Embodiments of the present invention use members of nature, structure and configuration achievable generally and/or specifically by implementing teachings of our co-
10 pending PCT application no. (our case P.5711) of even date herewith. Such members thus have capability to sustain and propagate input vibrational energy by bending waves in operative area(s) extending transversely of thickness often but not necessarily to edges of the member(s); are
15 configured with or without anisotropy of bending stiffness to have resonant mode vibration components distributed over said area(s) beneficially for acoustic coupling with ambient air; and have predetermined preferential locations or sites within said area for transducer means,
20 particularly operationally active or moving part(s) thereof effective in relation to acoustic vibrational activity in said area(s) and signals, usually electrical, corresponding to acoustic content of such vibrational activity. Uses are envisaged in co-pending International application No. (our
25 file P.5711) of even date herewith for such members as or in "passive" acoustic devices without transducer means, such as for reverberation or for acoustic filtering or for acoustically "voicing" a space or room; and as or in



"active" acoustic devices with transducer means, such as in a remarkably wide range of sources of sound or loudspeakers when supplied with input signals to be converted to said sound, or in such as microphones when exposed to sound to
5 be converted into other signals.

This invention is particularly concerned with electronic keyboard musical instruments incorporating active acoustic devices e.g. in the form of loudspeakers.

Members as above are herein called distributed mode
10 radiators and are intended to be characterised as in the above PCT application and/or otherwise as specifically provided herein.

The invention is an electronic musical instrument having a keyboard, characterised by a loudspeaker
15 comprising a distributed mode acoustic radiator and a transducer mounted wholly and exclusively on the radiator to vibrate the radiator to cause it to resonate.

The radiator may comprise a stiff lightweight panel having a cellular core sandwiched by a pair of high modulus
20 skins, a frame surrounding the panel and a resilient suspension supporting the panel on the frame.

The electrical musical instrument may have legs supporting the instrument above the ground and the radiator may be provided at the base of the instrument. The
25 loudspeaker may be positioned with the radiator substantially vertical.

The loudspeaker may form a ground support for the instrument.



BRIEF DESCRIPTION OF DRAWINGS

The invention is diagrammatically illustrated, by way of example, in the accompanying drawings, in which:-

Figure 1 is a diagram showing a distributed-mode
5 loudspeaker as described and claimed in our co-pending International application No. (our case P.5711);

Figure 2a is a partial section on the line A-A of Figure 1;

Figure 2b is an enlarged cross-section through a
10 distributed mode radiator of the kind shown in Figure 2a and showing two alternative constructions;

Figure 3 is a perspective diagram of a first embodiment of keyboard electronic instrument according to the present invention;

15 Figure 4 is a plan view of the underside of the instrument of Figure 3;

Figure 5 is a partial cross-sectional view of the instrument of Figures 3 and 4, and

Figure 6 is a perspective view of a second embodiment
20 of musical instrument according to the present invention.

BEST MODES FOR CARRYING OUT THE INVENTION

Referring to Figure 1 of the drawings, there is shown a panel-form loudspeaker (81) of the kind described and claimed in our co-pending International application No. (our case P.5711) of even date herewith comprising a
5 rectangular frame (1) carrying a resilient suspension (3) round its inner periphery which supports a distributed mode sound radiating panel (2). A transducer (9) e.g. as



described in detail with reference to our co-pending International applications Nos. (our cases P.5683/4/5) of even date herewith, is mounted wholly and exclusively on or in the panel (2) at a predetermined location defined by dimensions x and y , the position of which location is calculated as described in our co-pending International application No. (our case P.5711) of even date herewith, to launch bending waves into the panel to cause the panel to resonate to radiate an acoustic output.

10 The transducer (9) is driven by a signal amplifier (10), e.g. an audio amplifier, connected to the transducer by conductors (28). Amplifier loading and power requirements can be entirely normal, similar to conventional cone type speakers, sensitivity being of the order of 86 - 88dB/watt under room loaded conditions. Amplifier load impedance is largely resistive at 6 ohms, power handling 20-80 watts. Where the panel core and/or skins are of metal, they may be made to act as a heat sink for the transducer to remove heat from the motor coil of
15 the transducer and thus improve power handling.
20

Figures 2a and 2b are partial typical cross-sections through the loudspeaker (81) of Figure 1. Figure 2a shows that the frame (1), surround (3) and panel (2) are connected together by respective adhesive-bonded joints
25 (20). Suitable materials for the frame include lightweight framing, e.g. picture framing of extruded metal e.g. aluminium alloy or plastics. Suitable surround materials include resilient materials such as foam rubber and foam



plastics. Suitable adhesives for the joints (20) include epoxy, acrylic and cyano-acrylate etc. adhesives.

Figure 2b illustrates, to an enlarged scale, that the panel (2) is a rigid lightweight panel having a core (22) e.g. of a rigid plastics foam (97) e.g. cross linked polyvinylchloride or a cellular matrix (98) i.e. a honeycomb matrix of metal foil, plastics or the like, with the cells extending transversely to the plane of the panel, and enclosed by opposed skins (21) e.g. of paper, card, plastics or metal foil or sheet. Where the skins are of plastics, they may be reinforced with fibres e.g. of carbon, glass, Kevlar (RTM) or the like in a manner known per se to increase their modulus.

Envisaged skin layer materials and reinforcements thus include carbon, glass, Kevlar (RTM), Nomex (RTM) i.e. aramid etc. fibres in various lays and weaves, as well as paper, bonded paper laminates, melamine, and various synthetic plastics films of high modulus, such as Mylar (RTM), Kaptan (RTM), polycarbonate, phenolic, polyester or related plastics, and fibre reinforced plastics, etc. and metal sheet or foil. Investigation of the Vectra grade of liquid crystal polymer thermoplastics shows that they may be useful for the injection moulding of ultra thin skins or shells of smaller size, say up to around 30cm diameter. This material self forms an orientated crystal structure in the direction of injection, a preferred orientation for the good propagation of treble energy from the driving point to the panel perimeter.

Additional such moulding for this and other thermoplastics allows for the mould tooling to carry location and registration features such as grooves or rings for the accurate location of transducer parts e.g. the motor coil, and the magnet suspension. Additional with some weaker core materials it is calculated that it would be advantageous to increase the skin thickness locally e.g. in an area or annulus up to 150% of the transducer diameter, to reinforce that area and beneficially couple vibration energy into the panel. High frequency response will be improved with the softer foam materials by this means.

Envisaged core layer materials include fabricated honeycombs or corrugations of aluminium alloy sheet or foil, or Kevlar (RTM), Nomex (RTM), plain or bonded papers, and various synthetic plastics films, as well as expanded or foamed plastics or pulp materials, even aerogel metals if of suitably low density. Some suitable core layer materials effectively exhibit usable self-skinning in their manufacture and/or otherwise have enough inherent stiffness for use without lamination between skin layers. A high performance cellular core material is known under the trade name 'Rohacell' which may be suitable as a radiator panel and which is without skins. In practical terms, the aim is for an overall lightness and stiffness suited to a particular purpose, specifically including optimising contributions from core and skin layers and transitions between them.

Several of the preferred formulations for the panel employ metal and metal alloy skins, or alternatively a carbon fibre reinforcement. Both of these, and also designs with an alloy Aerogel or metal honeycomb core, will have substantial radio frequency screening properties which should be important in several EMC applications. Conventional panel or cone type speakers have no inherent EMC screening capability.

In addition the preferred form of piezo and electro dynamic transducers have negligible electromagnetic radiation or stray magnet fields. Conventional speakers have a large magnetic field, up to 1 metre distant unless specific compensation counter measures are taken.

Where it is important to maintain the screening in an application, electrical connection can be made to the conductive parts of an appropriate DML panel or an electrically conductive foam or similar interface may be used for the edge mounting.

The suspension (3) may damp the edges of the panel (2) to prevent excessive edge movement of the panel. Additionally or alternatively, further damping may be applied, e.g. as patches, bonded to the panel in selected positions to damp excessive movement to distribute resonance equally over the panel. The patches may be of bitumen-based material, as commonly used in conventional loudspeaker enclosures or may be of a resilient or rigid polymeric sheet material. Some materials, notably paper and card, and some cores may be self-damping. Where

desired, the damping may be increased in the construction of the panels by employing resiliently setting, rather than rigid setting adhesives.

Effective said selective damping includes specific
5 application to the panel including its sheet material of means permanently associated therewith. Edges and corners can be particularly significant for dominant and less dispersed low frequency vibration modes of panels hereof. Edge-wise fixing of damping means can usefully lead to a
10 panel with its said sheet material fully framed, though their corners can often be relatively free, say for desired extension to lower frequency operation. Attachment can be by adhesive or self-adhesive materials. Other forms of useful damping, particularly in terms of more subtle
15 effects and/or mid- and higher frequencies can be by way of suitable mass or masses affixed to the sheet material at predetermined effective medial localised positions of said area.

An acoustic panel as described above is bi-
20 directional. The sound energy from the back is not strongly phase related to that from the front. Consequently there is the benefit of overall summation of acoustic power in the room, sound energy of uniform frequency distribution, reduced reflective and standing
25 wave effects and with the advantage of superior reproduction of the natural space and ambience in the reproduced sound recordings.

While the radiation from the acoustic panel is largely

non-directional, the percentage of phase related information increases off axis. For improved focus for the phantom stereo image, placement of the speakers, like pictures, at the usual standing person height, confers the benefit of a moderate off-axis placement for the normally seated listener optimising the stereo effect. Likewise the triangular left/right geometry with respect to the listener provides a further angular component. Good stereo is thus obtainable.

10 There is a further advantage for a group of listeners compared with conventional speaker reproduction. The intrinsically dispersed nature of acoustic panel sound radiation gives it a sound volume which does not obey the inverse square law for distance for an equivalent point source. Because the intensity fall-off with distance is much less than predicted by inverse square law then consequently for off-centre and poorly placed listeners the intensity field for the panel speaker promotes a superior stereo effect compared to conventional speakers. This is because the off-centre placed listener does not suffer the doubled problem due to proximity to the nearer speaker; firstly the excessive increase in loudness from the nearer speaker, and then the corresponding decrease in loudness from the further loudspeaker.

25 There is also the advantage of a flat, lightweight panel-form speaker, visually attractive, of good sound quality and requiring only one transducer and no crossover for a full range sound from each panel diaphragm.

Figures 3,4 and 5 illustrate an electronic keyboard musical instrument (137), e.g. a piano, comprising a body (138) supported on ground engaging legs (139). The body (138) is formed with a keyboard (140) by which the instrument is played.

In conventional fashion the instrument is provided with a signal generator connected to the keys and with a signal amplifier which drives a loudspeaker. In the present embodiment the loudspeaker comprises a distributed mode acoustic radiator (81) of the kind shown in Figures 1 and 2, incorporating a stiff lightweight rectangular panel (2) mounted by its periphery in a frame (1) with an interposed resilient suspension (3) and driven by a transducer (9), all as described above with reference to Figures 1 and 2. As shown, the loudspeaker (81) forms the base of the body (138).

Figure 6 illustrates an electronic keyboard musical instrument, (137) very similar to that of Figures 3 to 5 having a body (138) having a keyboard (140). The body is supported on front legs (141) and is provided with a panel-form loudspeaker (81) to form the back support of the instrument.

The loudspeaker (81) comprises a rigid lightweight distributed mode acoustic radiator panel (2) mounted by its periphery in a surrounding resilient suspension (3) e.g. of foam rubber, the suspension being supported in a baffle-like frame (6), e.g. of medium density fibreboard. A transducer (9), is attached to the panel (2) to launch

bending waves into the panel to cause the panel to resonate to produce an acoustic output. The arrangement is thus of the kind shown in Figures 1 and 2. The transducer (9) will be driven by an amplifier (not shown) which is connected to
5 receive signals produced by depression of the keys of the keyboard, in generally conventional fashion.



WO 97/09857

THIS SHEET HAS BEEN
REPLACED

PCT/GB96/02164

13

CLAIMS

1. An electronic musical instrument having a keyboard, characterised by a loudspeaker comprising a distributed mode acoustic radiator and a transducer mounted wholly and
5 exclusively on the radiator to vibrate the radiator to cause it to resonate.
2. An electronic musical instrument according to claim 1, characterised in that the radiator comprises a stiff lightweight panel having a cellular core sandwiched by a
10 pair of high modulus skins.
3. An electronic musical instrument according to claim 2, characterised by a frame surrounding the panel.
4. An electronic musical instrument according to claim 3, characterised by a resilient suspension supporting the
15 panel on the frame.
5. An electronic musical instrument according to any preceding claim, characterised by legs supporting the instrument above the ground and in that the radiator is positioned at the base of the instrument.
- 20 6. An electronic musical instrument according to claim 5, characterised in that the loudspeaker is positioned with the radiator substantially vertical.
7. An electronic musical instrument according to claim 6, characterised in that the frame forms a ground support for
25 the instrument.

This Sheet Has Been Replaced



1/3

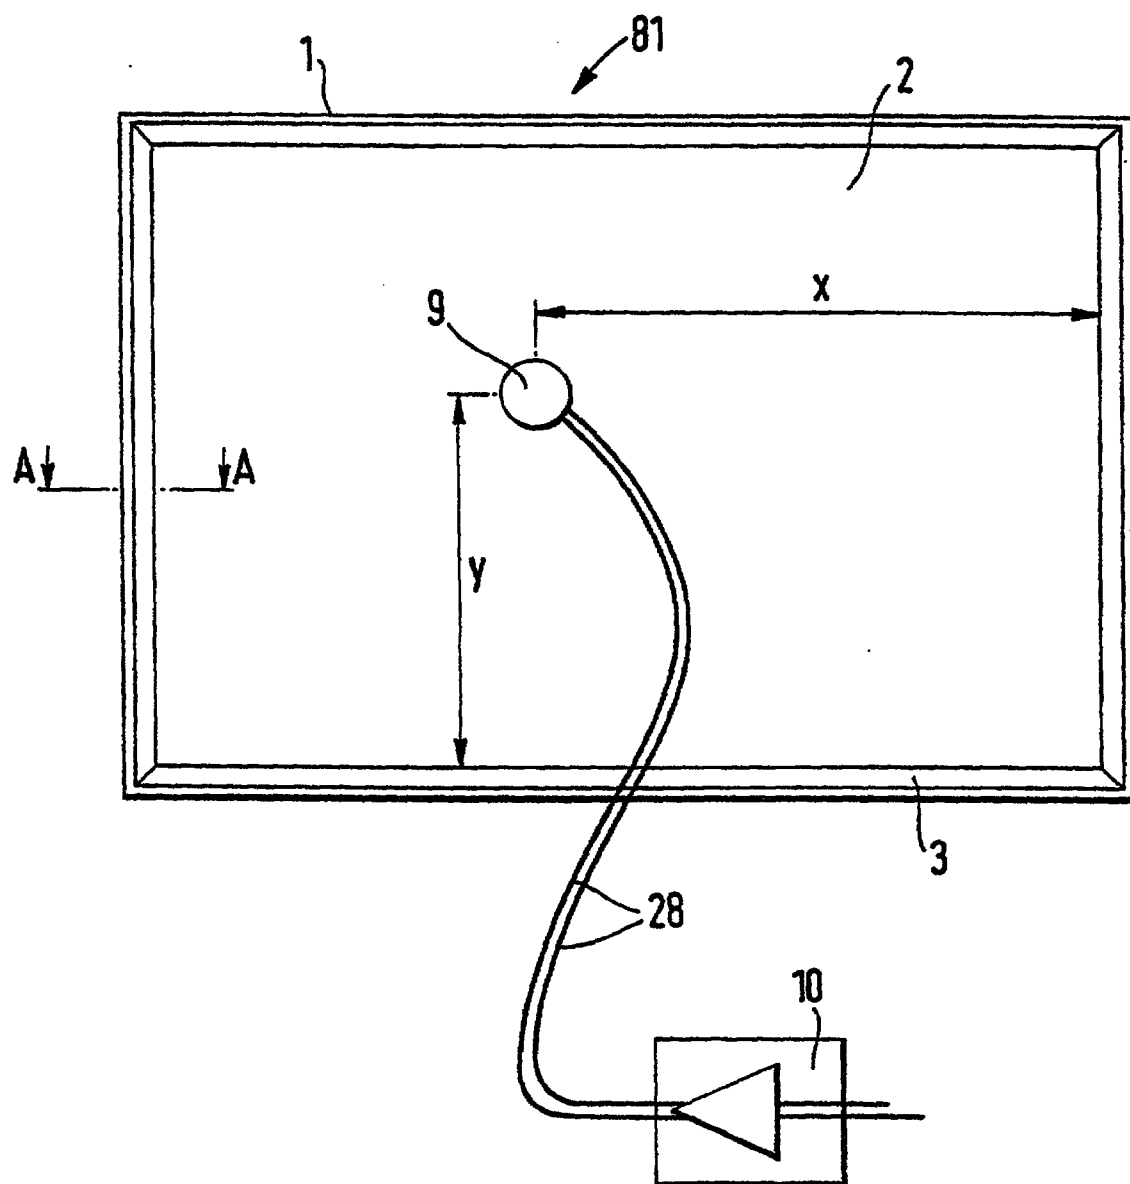


Fig. 1

2/3

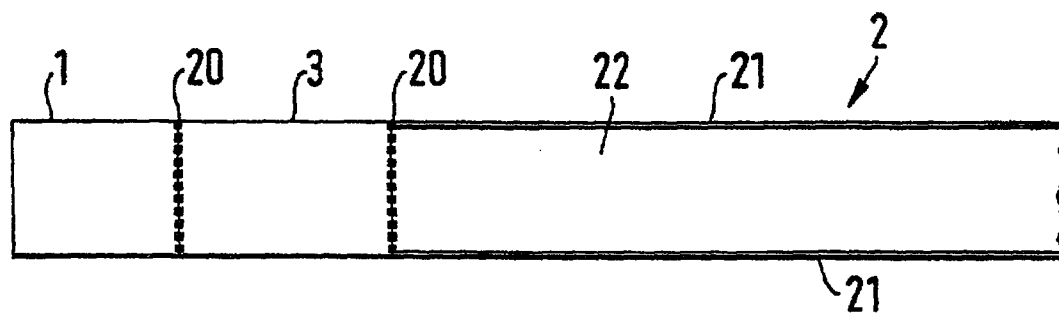


Fig. 2a

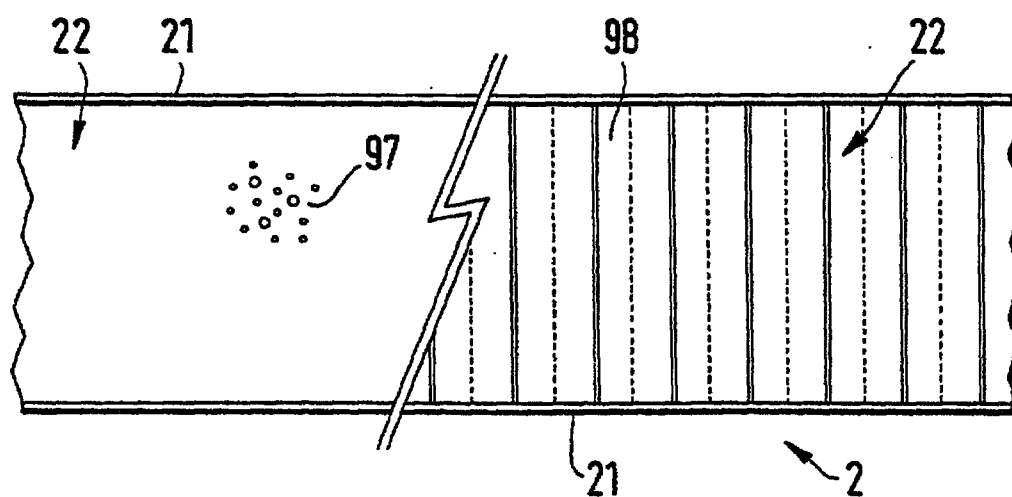


Fig. 2b

3/3

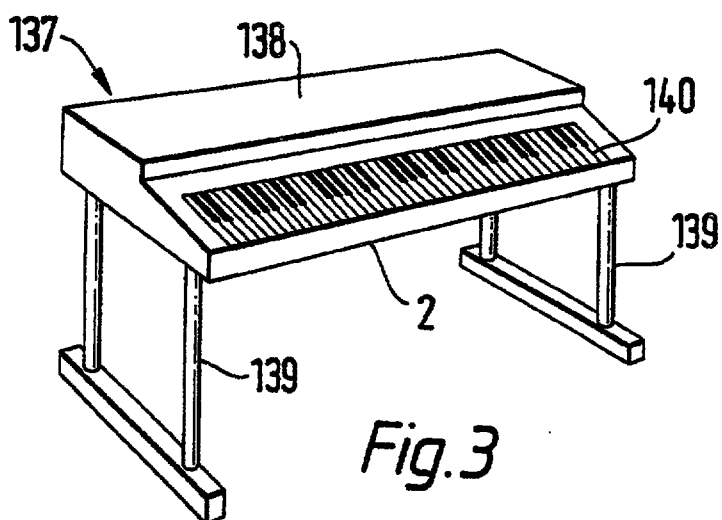


Fig. 3

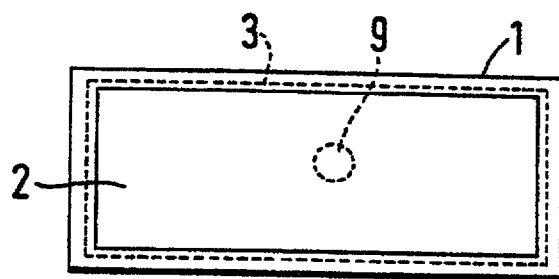


Fig. 4

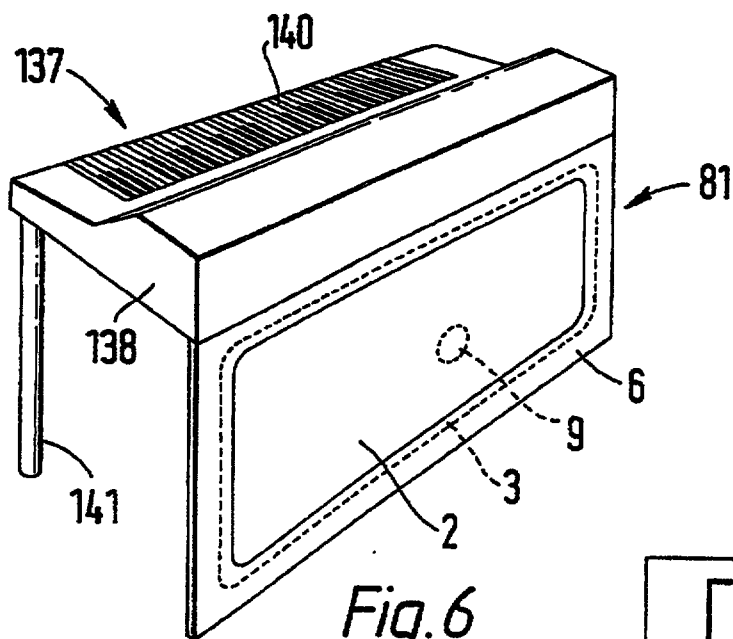


Fig. 6

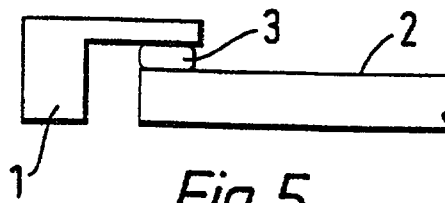


Fig. 5

to it a supporting body, in a free undamped manner;

and an electro-mechanical drive means coupled to the panel which serves to excite a multi-modal resonance in the radiator panel in response to an electrical input within a
5 working frequency band for the loudspeaker.

WO-A-90/03025 of SCHIMMEL discloses a device for actuating the soundboard of a piano so that the piano can reproduce recorded piano music.

DISCLOSURE OF INVENTION

10 Embodiments of the present invention use members of nature, structure and configuration achievable generally and/or specifically by implementing teachings of our co-pending PCT publication No. WO97/09842 of even date
herewith. Such members thus have capability to sustain and
15 propagate input vibrational energy by bending waves in operative area(s) extending transversely of thickness often but not necessarily to edges of the member(s); are configured with or without anisotropy of bending stiffness to have resonant mode vibration components distributed over
20 said area(s) beneficially for acoustic coupling with ambient air; and have predetermined preferential locations or sites within said area for transducer means, particularly operationally active or moving part(s) thereof effective in relation to acoustic vibrational activity in
25 said area(s) and signals, usually electrical, corresponding to acoustic content of such vibrational activity. Uses are envisaged in co-pending International publication No. WO97/09842 of even date herewith for such members as or in

"passive" acoustic devices without transducer means, such as for reverberation or for acoustic filtering or for acoustically "voicing" a space or room; and as or in "active" acoustic devices with transducer means, such as in
5 a remarkably wide range of sources of sound or loudspeakers when supplied with input signals to be converted to said sound, or in such as microphones when exposed to sound to be converted into other signals.

This invention is particularly concerned with
10 electronic keyboard musical instruments incorporating active acoustic devices e.g. in the form of loudspeakers.

Members as above are herein called distributed mode radiators and are intended to be characterised as in the above PCT application and/or otherwise as specifically
15 provided herein.

The invention is an electronic musical instrument having a keyboard and a loudspeaker, characterised in that the loudspeaker comprises a stiff lightweight member having capability to sustain and propagate input vibrational
20 energy by bending waves in at least one operative area extending transversely of thickness to have resonant mode vibration components distributed over said at least one area and have predetermined preferential locations or sites within said area for transducer means and having a
25 transducer mounted wholly and exclusively on said member at one of said locations or sites to vibrate the member to cause it to resonate forming an acoustic radiator which provides an acoustic output when resonating. The radiator

may have a cellular core sandwiched by a pair of high modulus skins. A frame may surround the radiator. A resilient suspension may support the radiator on the frame.

- 5 The electronic musical instrument may comprise a body having a base and legs supporting the body above the ground, the radiator being positioned at the base of the body. The loudspeaker is positioned with the radiator substantially vertical. The frame may form a ground
- 10 support for the instrument.

BRIEF DESCRIPTION OF DRAWINGS

The invention is diagrammatically illustrated, by way of example, in the accompanying drawings, in which:-

Figure 1 is a diagram showing a distributed-mode
5 loudspeaker as described and claimed in our co-pending International publication No. WO97/09842;

Figure 2a is a partial section on the line A-A of Figure 1;

Figure 2b is an enlarged cross-section through a
10 distributed mode radiator of the kind shown in Figure 2a and showing two alternative constructions;

Figure 3 is a perspective diagram of a first embodiment of keyboard electronic instrument according to the present invention;

15 Figure 4 is a plan view of the underside of the instrument of Figure 3;

Figure 5 is a partial cross-sectional view of the instrument of Figures 3 and 4, and

Figure 6 is a perspective view of a second embodiment
20 of musical instrument according to the present invention.

BEST MODES FOR CARRYING OUT THE INVENTION

Referring to Figure 1 of the drawings, there is shown a panel-form loudspeaker (81) of the kind described and claimed in our co-pending International publication No. WO97/09842 of even date herewith comprising a rectangular
5 frame (1) carrying a resilient suspension (3) round its inner periphery which supports a distributed mode sound radiating panel (2). A transducer (9) e.g as described in

detail with reference to our co-pending International publication Nos. WO97/09859, WO97/09861, WO97/09858 of even date herewith, is mounted wholly and exclusively on or in the panel (2) at a predetermined location defined by dimensions x and y , the position of which location is calculated as described in our co-pending International application No. WO97/09842 of even date herewith, to launch bending waves into the panel to cause the panel to resonate to radiate an acoustic output.

10 The transducer (9) is driven by a signal amplifier (10), e.g. an audio amplifier, connected to the transducer by conductors (28). Amplifier loading and power requirements can be entirely normal, similar to conventional cone type speakers, sensitivity being of the order of 86 - 88dB/watt under room loaded conditions. Amplifier load impedance is largely resistive at 6 ohms, power handling 20-80 watts. Where the panel core and/or skins are of metal, they may be made to act as a heat sink for the transducer to remove heat from the motor coil of
15 the transducer and thus improve power handling.

 Figures 2a and 2b are partial typical cross-sections through the loudspeaker (81) of Figure 1. Figure 2a shows that the frame (1), surround (3) and panel (2) are connected together by respective adhesive-bonded joints
25 (20). Suitable materials for the frame include lightweight framing, e.g. picture framing of extruded metal e.g. aluminium alloy or plastics. Suitable surround materials include resilient materials such as foam rubber and foam

CLAIMS


1. An electronic musical instrument (137) having a keyboard (140) and a loudspeaker (81), characterised in that the loudspeaker comprises a stiff, lightweight member
5 (2) having capability to sustain and propagate input vibrational energy by bending waves in at least one operative area extending transversely of thickness to have resonant mode vibration components distributed over said at least one area and have predetermined preferential
10 locations or sites within said area for transducer means and having a transducer (9) mounted wholly and exclusively on said member at one of said locations or sites to vibrate the member to cause it to resonate forming an acoustic radiator which provides an acoustic output when resonating.
- 15 2. An electronic musical instrument according to claim 1, characterised in that the radiator (2) has a cellular core (22) sandwiched by a pair of high modulus skins (21).
3. An electronic musical instrument according to claim 2, characterised by a frame (1) surrounding the radiator.
- 20 4. An electronic musical instrument according to claim 3, characterised by a resilient suspension (3) supporting the radiator on the frame.
5. An electronic musical instrument according to any preceding claim, characterised by a body (137) having a
25 base, and legs (139) supporting the body above the ground and in that the radiator (2) is positioned at the base of the body.
6. An electronic musical instrument according to claim 5,



characterised in that the loudspeaker (81) is positioned with the radiator (2) substantially vertical.

7. An electronic musical instrument according to claim 6, characterised in that the frame (2) forms a ground support
5 for the instrument.

9801928-4

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04R 7/06, 1/02, G10H 1/32		A2	(11) International Publication Number: WO 97/09857
			(43) International Publication Date: 13 March 1997 (13.03.97)
(21) International Application Number: PCT/GB96/02164			(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published Without international search report and to be republished upon receipt of that report.
(22) International Filing Date: 2 September 1996 (02.09.96)			
(30) Priority Data: 9517918.0 2 September 1995 (02.09.95) GB 9522281.6 31 October 1995 (31.10.95) GB 9606836.6 30 March 1996 (30.03.96) GB			
(71) Applicant (for all designated States except US): VERITY GROUP PLC [GB/GB]; Stonehill, Huntingdon, Cambridgeshire PE18 6ED (GB).			
(72) Inventors; and (75) Inventors/Applicants (for US only): AZIMA, Henry [CA/GB]; 3 Southacre Close, Chaucer Road, Cambridge CB2 2TT (GB). COLLOMS, Martin [GB/GB]; 22 Burgess Hill, London NW2 2DA (GB). HARRIS, Neil [GB/GB]; 9 Davey Crescent, Great Shelford, Cambridge CB2 5JF (GB).			
(74) Agent: MAGUIRE & CO.; 5 Crown Street, St. Ives, Cambridgeshire PE17 4EB (GB).			

(54) Title: MUSICAL INSTRUMENTS INCORPORATING LOUDSPEAKERS

(57) Abstract

An electronic musical instrument (137) having a keyboard (140), characterized by a loudspeaker (81) comprising a distributed mode acoustic radiator (2) and a transducer (9) mounted wholly and exclusively on the radiator to vibrate the radiator to cause it to resonate.

